

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM 24VAC/DC BU/WH/GN/YE/RD



c(UL)us

MECHANICAL DATA		
Height	243 mm	
Diameter	38 mm	
Materials	PC	
Dome colour	Clear	
Housing colour	Silver	
Protection category	IP65	
Connection	M12 plug 8-pole	
Cable entry	Membrane grommet	
Cable entry minimum	d = 1 mm	
Cable entry maximum	d = 9 mm	
Tension relief	Pull-out protection	
Type of fixing	Built-in mounting	
Working temperature minimum	-20°C	
Working temperature maximum	+50°C	
Weight with packaging	172 g	
Product weight	118 g	

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	175 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA		
Light source	LED	
Light colour	Blue Green Red White Yellow	
Optical signal image	Permanent	
Service life optical	50,000 h maximum	

APPROVAL DATA

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM 24VAC/DC BU/WH/GN/YE/RD


Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM 24VAC/DC BU/WH/GN/YE/RD

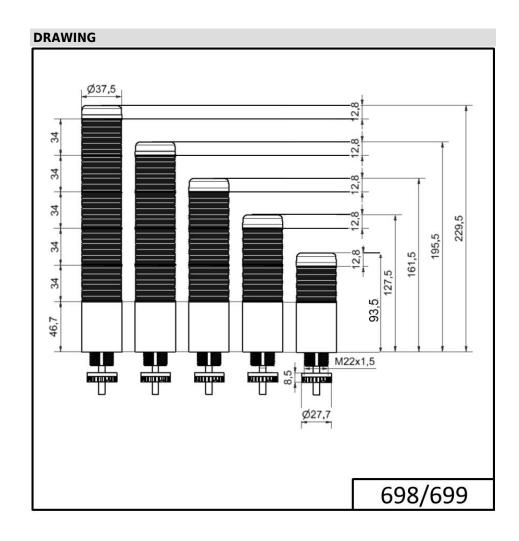

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.