

Midi free-standing Beacons / EvoSIGNAL

Midi TwinFLASH 12/24VAC/DC RD



Part No.:	261.120.70	C F VROHS	4 110 -		UK	
Series:	EvoSIGNAL Midi		7	ROH52	c QL) us	CA

MECHANICAL DATA			
Height	130 mm		
Diameter	85 mm		
Materials	PC PC/ABS		
Dome colour	Red		
Housing colour	Grey		
Protection category	IP66		
Connection	Push-in terminal		
cross-sectional area minimum	0,25mm ² / 24AWG		
cross-sectional area maximum	1,50mm² / 16AWG		
Working temperature minimum	-30°C		
Working temperature maximum	+60°C		
Weight with packaging	186 g		
Product weight	148 g		

ELECTRICAL DATA		
Operating voltage	12V 24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	12 VDC	
Rated operational current	150 mA	
Rated inrush current	1A	
Protection class	Protection class 2	
Pollution degree	3	
Overvoltage category	III	

OPTICAL DATA				
Light source	LED			
Light colour	Red			
Optical signal image	EVS Flash TwinFlash			
Flash frequency	1 Hz			
Service life optical	50,000 h minimum			
Pulse- & pause Duration [ms]	280N, 1640FF, 280N, 7440FF			

APPROVAL DATA	
Conforms with CE	Yes

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

Midi TwinFLASH 12/24VAC/DC RD


WEEE	Yes	
Conform with ATEX-directive	No	
Conforms with CCC	No	
Conforms with UL	cULus	
UL Type Rating	Type 12	
Conforms with FCC	No	
Conforms with IC	No	
EAC certificate available	Yes	
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)	
Conforms with AS-I	No	
ICAO Certification	No	
Conforms with DNV	No	
Conforms with RoHS CN	No	
Conforms with VdS	No	
MTTF-value [years]	469	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

Midi TwinFLASH 12/24VAC/DC RD

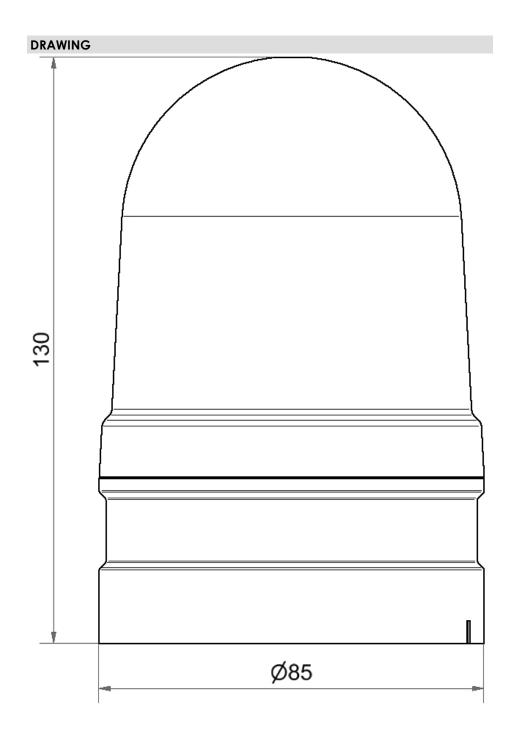

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.