

### Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM 24VAC/DC GN/YE/RD



698.310.75
Kompakt 3

MECHANICAL DATA	
Height	175 mm
Diameter	38 mm
Materials	PC
Dome colour	Clear
Housing colour	Silver
Protection category	IP65
Connection	Cable
cross-sectional area maximum	0,34mm² / 22AWG
Cable entry	Membrane grommet
Cable entry minimum	d = 1 mm
Cable entry maximum	d = 9  mm
Cable length	2000 mm
Tension relief	Pull-out protection
Type of fixing	Built-in mounting
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	197 g
Product weight	163 g

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Rated operational current	100 mA	
Rated inrush current	500 mA	
Protection class	Protection class 2	
Pollution degree	3 In the connection area: 2	

OPTICAL DATA		
Light source	LED	
Light colour	Green Red Yellow	
Optical signal image	Permanent	
Service life optical	50,000 h maximum	

#### **APPROVAL DATA**

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



## Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM 24VAC/DC GN/YE/RD


Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12 Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM 24VAC/DC GN/YE/RD

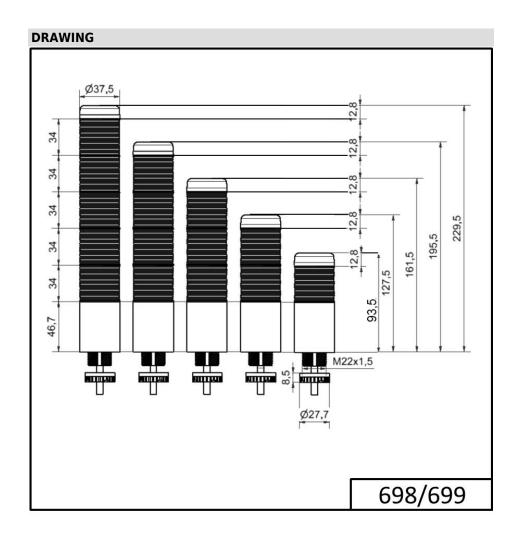

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.