

### Midi free-standing Beacons / EvoSIGNAL

## Midi Rotating 12/24V AC/DC BU



Part No.:	261.540.70		RoHS2		UK	
Series:	<b>EvoSIGNAL Midi</b>		C	<b>КОП</b> 32	c <b>GL</b> ) us	CA

MECHANICAL DATA		
Height	130 mm	
Diameter	85 mm	
Materials	PC PC/ABS	
Dome colour	Blue	
Housing colour	Grey	
Protection category	IP66	
Connection	Push-in terminal	
cross-sectional area minimum	0,25mm² / 24AWG	
cross-sectional area maximum	1,50mm² / 16AWG	
Working temperature minimum	-30°C	
Working temperature maximum	+60°C	
Weight with packaging	212 g	
Product weight	170 g	

ELECTRICAL DATA		
Operating voltage	12V	
	24V	
Operating voltage type	AC/DC	
Operating voltage frequency	50Hz	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	12 VDC	
Rated operational current	120 mA	
Rated inrush current	1A	
Protection class	Protection class 2	
Pollution degree	3	
Overvoltage category	III	

OPTICAL DATA		
Light source	LED	
Light colour	Blue	
Optical signal image	Revolving	
Service life optical	50,000 h minimum	
Rotation speed (rpm)	180 U/min	
Pulse- & pause Duration [ms]	55ON, 278OFF	

APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conform with ATEX-directive	No

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Midi free-standing Beacons / EvoSIGNAL

# Midi Rotating 12/24V AC/DC BU


Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	406

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Midi free-standing Beacons / EvoSIGNAL

# Midi Rotating 12/24V AC/DC BU

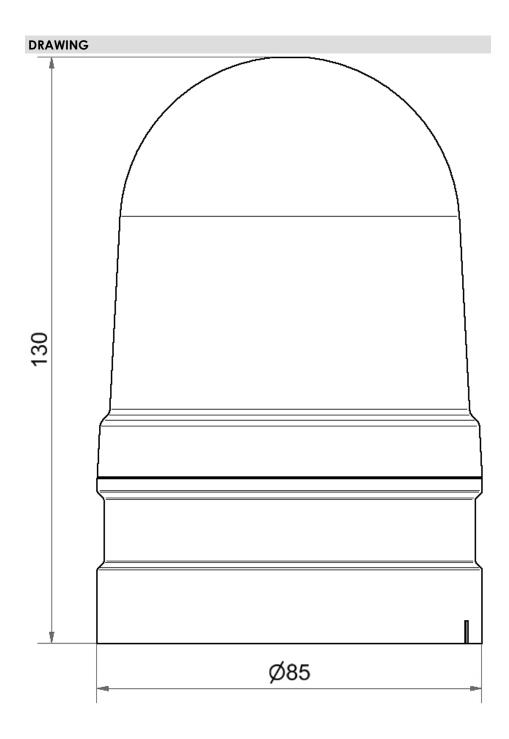

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.