

Technical data sheet Stationary bar code reader

Part no.: 50109909

BCL 508i OL 100 H



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Accessories











Technical data



100 mA

Series	BCL 500i
Special version	
Special version	Heating
Functions	
Functions	Alignment mode
	AutoConfig
	AutoControl
	AutoReflAct
	Code fragment technology
	Heating
	LED indicator
	Reference code comparison
Characteristic parameters	
MTTF	42.4 years
Read data	
Code types, readable	2/5 Interleaved
	Codabar
	Code 128
	Code 39
	Code 93
	EAN 128
	EAN 8/13
	EAN Addendum
	GS1 Databar Expanded
	GS1 Databar Limited
	GS1 Databar Omnidirectional
	UPC
Scanning rate, typical	1,000 scans/s
Bar codes per reading gate, max. number	64 Piece(s)
Optical data	
Reading distance	1,000 2,400 mm
Light source	Laser, Red
Wavelength	650 nm
	2, IEC/EN 60825-1:2007
Laser class	,
Transmitted-signal shape	Continuous
Transmitted-signal shape	,
Transmitted-signal shape Bar code contrast (PCS) Modulus size	Continuous 60 % 0.7 1 mm
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate Beam deflection	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s Via rotating polygon wheel + stepping motor with mirror
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate Beam deflection Light beam exit	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s Via rotating polygon wheel + stepping motor with mirror Zero position at side at angle less than
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate Beam deflection Light beam exit Oscillating mirror frequency	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s Via rotating polygon wheel + stepping motor with mirror Zero position at side at angle less that 90°
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate Beam deflection Light beam exit Oscillating mirror frequency Max. swivel angle	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s Via rotating polygon wheel + stepping motor with mirror Zero position at side at angle less that 90° 10 Hz
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate Beam deflection Light beam exit Oscillating mirror frequency Max. swivel angle Electrical data	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s Via rotating polygon wheel + stepping motor with mirror Zero position at side at angle less than 90° 10 Hz
Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate Beam deflection Light beam exit Oscillating mirror frequency Max. swivel angle Electrical data Protective circuit	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s Via rotating polygon wheel + stepping motor with mirror Zero position at side at angle less than 90° 10 Hz 40 °
Laser class Transmitted-signal shape Bar code contrast (PCS) Modulus size Reading method Scanning rate Beam deflection Light beam exit Oscillating mirror frequency Max. swivel angle Electrical data Protective circuit Performance data Supply voltage U _B	Continuous 60 % 0.7 1 mm Oscillating-mirror scanner 800 1,200 scans/s Via rotating polygon wheel + stepping motor with mirror Zero position at side at angle less than 90° 10 Hz 40 °

Output current, max.	
Number of inputs/outputs selectable	4 Piece(s)
Voltage type, outputs	DC
Switching voltage, outputs	Typ. U _B / 0 V
Voltage type, inputs	DC
Switching voltage, inputs	Typ. U _B / 0 V
Input current, max.	8 mA
nterface	
ype	Ethernet
Ethernet	
Architecture	Client
	Server
Address assignment	DHCP
	Manual address assignment
Transmission speed	10 Mbit/s
	100 Mbit/s
Function	Process
Switch functionality	Integrated
Transmission protocol	TCP/IP
tamila a listant	
Service interface	
ype	USB
uan	
USB	Configuration de se
Function	Configuration via software
	Service
Connection	
	5 Diago(a)
Connection lumber of connections	5 Piece(s)
lumber of connections	5 Piece(s)
	5 Piece(s) Service interface
lumber of connections Connection 1 Function	Service interface
Connection 1 Function Type of connection	Service interface USB
Connection 1 Function Type of connection Designation on device	Service interface
Connection 1 Function Type of connection	Service interface USB SERVICE
Connection 1 Function Type of connection Designation on device	Service interface USB SERVICE
Connection 1 Function Type of connection Designation on device Connector type	Service interface USB SERVICE
Connection 1 Function Type of connection Designation on device Connector type Connection 2	Service interface USB SERVICE USB 2.0 Standard-A
Connection 1 Function Type of connection Designation on device Connector type Connection 2	Service interface USB SERVICE USB 2.0 Standard-A Signal IN
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Type of connection Designation on device Thread size Type Material No. of pins	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded Signal IN
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded Signal IN
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded Signal IN Signal OUT
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded Signal IN Signal OUT Voltage supply
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded Signal IN Signal OUT Voltage supply Connector
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded Signal IN Signal OUT Voltage supply Connector PWR
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded Signal IN Signal OUT Voltage supply Connector PWR M12
Connection 1 Function Type of connection Designation on device Connector type Connection 2 Function Type of connection Designation on device Thread size Type Material No. of pins Encoding Connection 3 Function Type of connection Designation on device Thread size Type	Service interface USB SERVICE USB 2.0 Standard-A Signal IN Signal OUT Connector SW IN/OUT M12 Female Metal 5 -pin A-coded Signal IN Signal OUT Voltage supply Connector PWR M12 Male

Inputs/outputs selectable Output current, max.

Technical data



Connection 4	
Function	BUS IN
Type of connection	Connector
Designation on device	HOST / BUS IN
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded
Connection 5	
Function	BUS OUT
Type of connection	Connector
Designation on device	BUS OUT
Thread size	M12
Туре	Female
No. of pins	4 -pin

N/I	L	: :	data
wec	nan	ıcaı	пата

Cubic
173 mm x 84 mm x 147 mm
Metal
Aluminum
Glass
1,500 g
Red
Silver
Dovetail grooves
Mounting thread
Via optional mounting device

Operation and display

Type of display	LED
	Monochromatic graphical display, 128x64 pixel, with background lighting
Number of LEDs	2 Piece(s)
Type of configuration	Via web browser
Operational controls	Button(s)

Environmental data

Ambient temperature, operation	-35 40 °C
Ambient temperature, storage	-20 +70 °C
Relative humidity (non-condensing)	90 %
Extraneous light tolerance on the bar code, max.	2,000 lx

Certifications

Degree of protection	IP 65
Protection class	III
Certifications	c UL US
Test procedure for EMC in accordance with standard	EN 55022
	EN 61000-4-2, -3, -4, -6
Test procedure for shock in accordance with standard	IEC 60068-2-27, test Ea
Test procedure for continuous shock in accordance with standard	IEC 60068-2-29, test Eb
Test procedure for vibration in accordance with standard	IEC 60068-2-6, test Fc


Classification

Customs tariff number	84719000
ECLASS 5.1.4	27280102
ECLASS 8.0	27280102
ECLASS 9.0	27280102
ECLASS 10.0	27280102
ECLASS 11.0	27280102
ECLASS 12.0	27280102
ECLASS 13.0	27280102
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550
ETIM 8.0	EC002550

Dimensioned drawings



All dimensions in millimeters

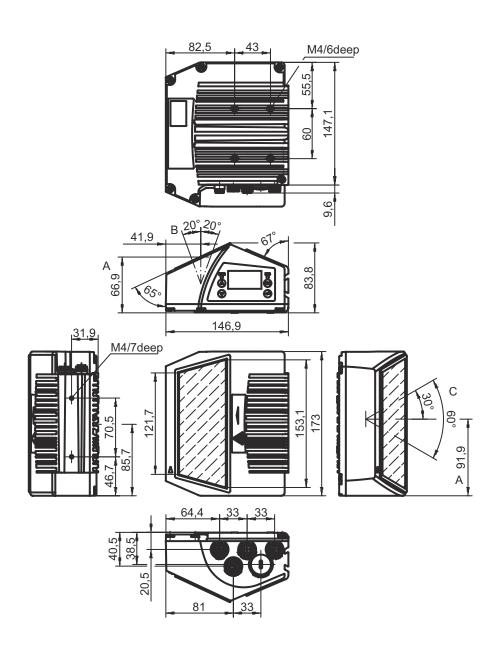


Electrical connection

Connection 1	SERVICE

Function	Service interface
Type of connection	USB
Connector type	USB 2.0 Standard-A

Pin	Pin assignment
1	+5 V DC
2	D Data
3	D+ - Data
4	GND




Electrical connection




Connection 2	SW IN/OUT
Function	Signal IN
	Signal OUT
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment
1	VOUT
2	SWIO 1
3	GND
4	SWIO 2
5	FE




Connection 3	PWR
Function	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Connector
Thread size	M12
Туре	Male
Material	Metal
No. of pins	5 -pin
Encoding	A-coded

Pin	Pin assignment
1	VIN
2	SWIO 3
3	GND
4	SWIO 4
5	FE



Connection 4	HOST / BUS IN
Function	BUS IN
Type of connection	Connector
Thread size	M12
Туре	Female
Material	Metal
No. of pins	4 -pin
Encoding	D-coded

Pin	Pin assignment
1	TD+
2	RD+
3	TD-
4	RD-









Connection 5	BUS OUT	
Function	BUS OUT	
Type of connection	Connector	
Thread size	M12	
Туре	Female	
Material	Metal	
No. of pins	4 -pin	
Encoding	D-coded	

Pin	Pin assignment
1	TD+
2	RD+
3	TD-
4	RD-



Diagrams

Reading field curve

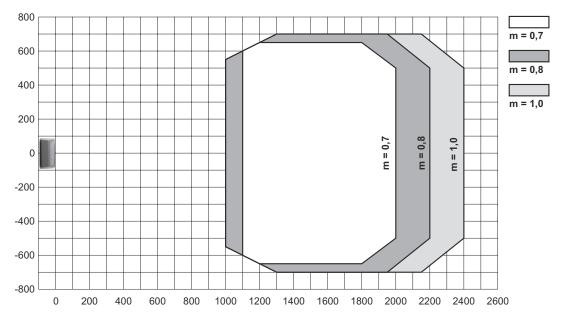


- x Reading field distance [mm]
- y Reading field width [mm]

Diagrams



Lateral reading field curve

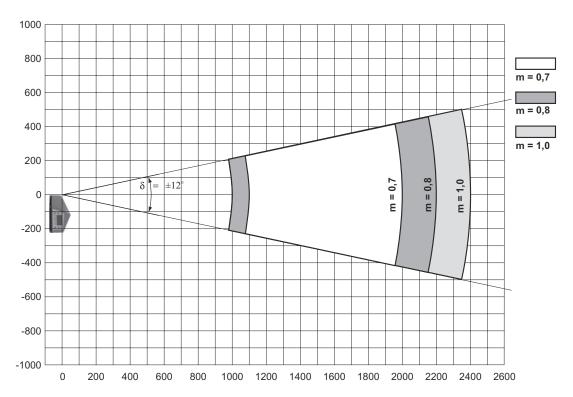

- Reading field distance [mm]
- Reading field height [mm]

Operation and display

LED	Display	Meaning
1 PWR	Off	Device switched off
	Green, flashing	Device ok, initialization phase
	Green, continuous light	Device OK
	Orange, continuous light	Service operation
	Red, flashing	Device OK, warning set
	Red, continuous light	Device error
2 BUS	Off	No supply voltage
	Green, flashing	Initialization
	Green, continuous light	Bus operation ok
	Red, flashing	Communication error
	Red, continuous light	Network error

Part number code



Part designation: BCL XXXX YYZ AAA B

BCL	Operating principle BCL: bar code reader
XXXX	Series/interface (integrated fieldbus technology) 500i: RS 232 / RS 422 / RS 485 (multiNet master) 501i: RS 485 (multiNet slave) 504i: PROFIBUS DP 508i: EtherNet TCP/IP, UDP 548i: PROFINET RT 558i: EtherNet/IP
YY	Scanning principle S: line scanner (single line) O: oscillating-mirror scanner (oscillating mirror)
Z	Optics N: High Density (close) M: Medium Density (medium distance) F: Low Density (remote) L: Long Range (very large distances)
AAA	Beam exit 100: lateral 102: front
В	Special equipment H: With heating

Note



A list with all available device types can be found on the Leuze website at www.leuze.com.

Notes



Observe intended use!



- \$ This product is not a safety sensor and is not intended as personnel protection.
- \$ The product may only be put into operation by competent persons.
- ♥ Only use the product in accordance with its intended use.

\triangle

ATTENTION! LASER RADIATION - CLASS 2 LASER PRODUCT



Do not stare into beam!

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of **laser class 2** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.

- b Never look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- 🦖 Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- 🔖 CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure.
- Observe the applicable statutory and local laser protection regulations.
- The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

Notes



NOTE



Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- \$ Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

Accessories

Connection technology - Connection cables

Part no.	Designation	Article	Description
50132079	KD U-M12-5A-V1- 050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 5 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 5.000 mm Sheathing material: PVC

Connection technology - Interconnection cables

	Part no.	Designation	Article	Description
 · · ·	50107726	KB USB A - USB A	Interconnection cable	Suitable for interface: USB Connection 1: USB Connection 2: USB Shielded: Yes Cable length: 1,800 mm Sheathing material: PVC
	50137077	KSS ET-M12-4A- M12-4A-P7-020	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin Shielded: Yes Cable length: 2.000 mm Sheathing material: PUR
	50137078	KSS ET-M12-4A- M12-4A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: Connector, M12, Axial, Male, D-coded, 4 -pin Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50135081	KSS ET-M12-4A- RJ45-A-P7-050	Interconnection cable	Suitable for interface: Ethernet Connection 1: Connector, M12, Axial, Male, D-coded, 4 -pin Connection 2: RJ45 Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR

Accessories



Mounting technology - Other

 Part no.	Designation	Article	Description
50111224	BT 59	Mounting bracket	Fastening, at system: Groove mounting Mounting bracket, at device: Clampable Material: Metal Shock absorber: No

Services

	Part no.	Designation	Article	Description
	S981020	CS30-E-212	Hourly rate	Details: Compilation of the application data, selection and suggestion of suitable sensor system, drawing prepared as assembly sketch. Conditions: Completed questionnaire or project specifications with a description of the application have been provided. Restrictions: Travel and accommodation charged separately and according to expenditure.
	S981014	CS30-S-110	Start-up support	Details: Performed at location of customer's choosing, duration: max. 10 hours. Conditions: Devices and connection cables are already mounted, price not including travel costs and, if applicable, accommodation expenses. Restrictions: No mechanical (mounting) and electrical (wiring) work performed, no changes (attachments, wiring, programming) to third-party components in the nearby environment.
	S981019	CS30-T-110	Product training	Details: Location and content to be agreed upon, duration: max. 10 hours. Conditions: Price not including travel costs and, if applicable, accommodation expenses. Restrictions: Travel costs and accommodation expenses charged separately and according to expenditure.
 	S981021	CS30-V-212	Hourly rate	Details: REA evaluation with creation of a test report, evaluation of the code quality. Conditions: Original bar codes to be provided by the client.

Note



🖔 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.