## Mini / LED/Horn 424 LED Horn WM Contin. tone 115VAC YE



ļ



235 mm
83 mm
PC
Yellow
Grey
IP65
Screw terminals
1,50mm² / 16AWG
Membrane grommet
d = 1 mm
d = 9 mm
Pull-out protection
Wall mounting
-20°C
+50°C
224 g
173 g
115V
AC
60Hz
+/- 10%
115 VAC
70 mA
1.000 mA
Protection class 2
3
II
Ui = 250V; Uimp = 2.500V
LED
Yellow
Permanent
50,000 h maximum
98,0 dB (A)

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


## Mini / LED/Horn 424 LED Horn WM Contin. tone 115VAC YE

Acoustic signal image	Continuous tone
Audio frequency	110 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	Yes
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

## Mini / LED/Horn 424 LED Horn WM Contin. tone 115VAC YE

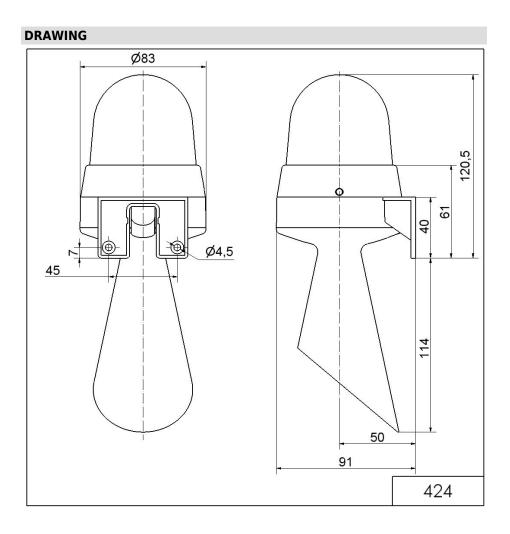

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.