

Technical data sheet Stationary bar code reader

Part no.: 50138197

BCL 95 M0/R2-150-M12.8



Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Notes
- Accessories









Technical data



Basic data		Outputs	
Series	BCL 95	Number of digital switching outputs	1 Piece(s)
		Conitability authority	
Functions		Switching outputs Voltage type	DC
Functions	Alignment mode	Switching voltage	5 30 V DC, 20 mA
	AutoConfig	Cuntoning Voltage	5 66 V 26, 26 HIV
	I/O	Switching output 1	
	LED indicator	Switching element	Transistor, NPN
	Multiple read / MultiScan	Function	configurable
	Output format selectable		
	Reading gate control	Interface	
	Reference code comparison	Туре	RS 232
Dood data			
Read data		RS 232	_
Code types, readable	2/5 Interleaved	Function	Process
	Codabar	Transmission speed	4,800 57,600 Bd
	Code 128	Data format	Adjustable
	Code 32	Start bit	1
	Code 39	Data bit	7,8
	Code 93	Stop bit	1.2
	EAN 128	Parity	Adjustable
	EAN 8/13	Transmission protocol	Adjustable
	EAN Addendum	Data encoding	ASCII
	EAN/UPC		HEX
	Pharmacode (available upon consultation)	Service interface	
	UPC-A	Туре	RS 232
	UPC-E	Туре	10 202
Scanning rate, typical	600 scans/s	RS 232	
	333 334.13.3	Function	Service
Optical data			
Reading distance	25 170 mm	Connection	
Light source	Laser, Red	Number of connections	1 Piece(s)
Wavelength	655 nm		
Laser class	1 acc. to IEC 60825-1:2014 (EN 60825-	Connection 1	
	1:2014)	Function	Data interface
	2 acc. to IEC 60825-1:2007 (EN 60825-1:2007)		Signal IN
Transmitted-signal shape	Continuous		Signal OUT
Usable opening angle (reading field	66 °		Voltage supply
opening)	00	Type of connection	Cable with connector
Modulus size	0.15 0.5 mm	Cable length	150 mm
Reading method	Line scanner	Sheathing material	PVC
Scanning rate	600 scans/s	Cable color	Black
Beam deflection	Via rotating polygon wheel	Wire cross section	0.081 mm²
Light beam exit	Lateral	Thread size	M12
Light bodin oxit	Edition	Туре	Male
Electrical data		Material	Plastic
5		No. of pins	8 -pin
Protective circuit	Short circuit protected	Encoding	A-coded
Daufarmanaa data			
Performance data	4.75 5.5 V.D.C	Mechanical data	
Supply voltage U _B Current consumption, max.	4.75 5.5 V, DC 450 mA	Design	Cubic
ourient consumption, max.	TOU IIIA	Dimension (W x H x L)	62 mm x 56.9 mm x 23.8 mm
Inputs		Housing material	Metal
Number of digital switching inputs	1 Piece(s)	-	
and a second sec	(-)	Metal housing	Diecast zinc
Switching inputs		Lens cover material	Glass
		Net weight	210 g
Voltage type	DC	Hamaian antes	Dad
• •	DC 5V DC	Housing color	Red
Voltage type			Silver
Voltage type		Housing color Type of fastening	

Technical data



Operation and display

Type of display	LED
Number of LEDs	2 Piece(s)
Environmental data	
Ambient temperature, operation	5 40 °C
Ambient temperature, storage	-20 60 °C
Relative humidity (non-condensing)	0 90 %
Extraneous light protection, max.	2,000 lx
Certifications	
Degree of protection	IP 54
Protection class	III
Certifications	c UL US
Test procedure for EMC in accordance	EN 61326-1:2013-01
with standard	FCC 15-CFR 47 Part 15 (09-07-2015) Limits Class B
Test procedure for shock in	IEC 60068-2-27, test Ea
accordance with standard	


Classification

Customs tariff number	84719000
ECLASS 5.1.4	27280102
ECLASS 8.0	27280102
ECLASS 9.0	27280102
ECLASS 10.0	27280102
ECLASS 11.0	27280102
ECLASS 12.0	27280102
ECLASS 13.0	27280102
ETIM 5.0	EC002550
ETIM 6.0	EC002550
ETIM 7.0	EC002550
ETIM 8.0	EC002550

Dimensioned drawings

Leuze

All dimensions in millimeters

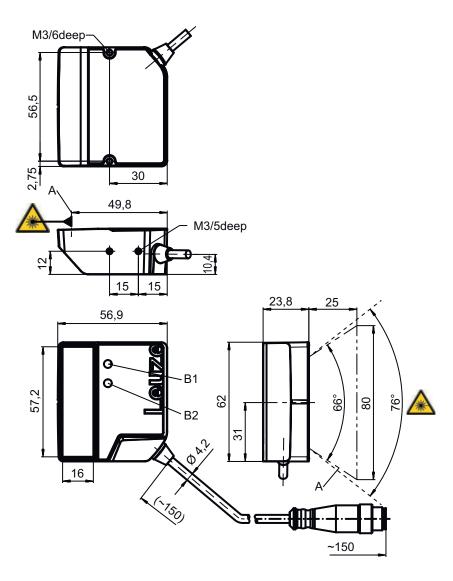

A Laser beam B1 Decode LED B2 Status LED

NOTE For exact positioning of the laser beam in the application, the scanner must be aligned.

Electrical connection


Connection 1

Function	Data interface
	Signal IN
	Signal OUT
	Voltage supply
Type of connection	Cable with connector
Cable length	150 mm
Sheathing material	PVC
Cable color	Black
Wire cross section	0.081 mm²
Thread size	M12
Туре	Male
Material	Plastic
No. of pins	8 -pin
Encoding	A-coded

Electrical connection




1 V+ 2 IN 1 3 GND 4 OUT 1 5 n.c.
3 GND 4 OUT 1
4 OUT 1
5 n.c.
6 RS 232 RxD
7 RS 232 TxD
8 FE/SHIELD




Diagrams

Reading field curve for module m = 0.165 ... 0.5 mm (6.5 ... 20 mil)

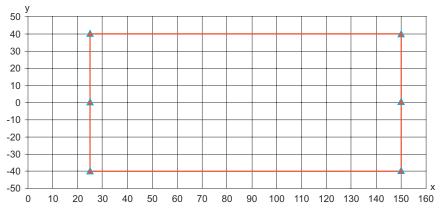

- Reading distance [mm]
- Reading field width [mm]

Reading field curve for module m = 0.2 ... 0.5 mm (8 ... 20 mil)

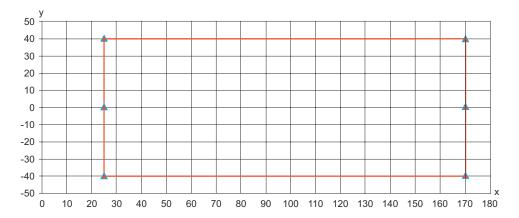

- x Reading distance [mm]
- y Reading field width [mm]

Operation and display

LED	Display	Meaning	
1 PWR	Green, flashing	Initialization	
	Green, continuous light	Operational readiness	
	Red, flashing	Warnings	
	Red, continuous light	Error	





LE	D	Display	Meaning
1	PWR	Orange, flashing	Service operation active
2	2 GOOD READ	Green, 200 ms on	Reading successful
		Red, 200 ms off	No reading result
		Orange, continuous light	Reading gate active

Notes



Observe intended use!



- 🖔 This product is not a safety sensor and is not intended as personnel protection.
- The product may only be put into operation by competent persons.
- ♥ Only use the product in accordance with its intended use



For UL applications:



\$\ \ \ \ \ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).

WARNING! LASER RADIATION - CLASS 1 LASER PRODUCT



The device satisfies the requirements of IEC/EN 60825-1:2014 safety regulations for a product of laser class 1

- b Observe the applicable statutory and local laser protection regulations.
- The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.



ATTENTION! LASER RADIATION - CLASS 2 LASER PRODUCT



Do not stare into beam!

The device satisfies the requirements of IEC 60825-1:2007 (EN 60825-1:2007) safety regulations for a product of **laser class 2** as well as the U.S. 21 CFR 1040.10 regulations with deviations corresponding to Laser Notice No. 50 from June 24, 2007.

- Shever look directly into the laser beam or in the direction of reflected laser beams! If you look into the beam path over a longer time period, there is a risk of injury to the retina.
- 🤟 Interrupt the laser beam using a non-transparent, non-reflective object if the laser beam is accidentally directed towards a person.
- When mounting and aligning the device, avoid reflections of the laser beam off reflective surfaces!
- CAUTION! Use of controls or adjustments or performance of procedures other than specified herein may result in hazardous light exposure. The glass optics cover is the only aperture through which laser radiation may be observed on this product.
- $\$ Observe the applicable statutory and local laser protection regulations.
- The device must not be tampered with and must not be changed in any way. There are no user-serviceable parts inside the device. Repairs must only be performed by Leuze electronic GmbH + Co. KG.

The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com

In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199

We reserve the right to make technical changes eng • 2023-02-03

Notes



NOTE



Affix laser information and warning signs!

Laser information and warning signs are affixed to the device. In addition, self-adhesive laser information and warning signs (stick-on labels) are supplied in several languages.

- \(\) Affix the laser information sheet to the device in the language appropriate for the place of use. When using the device in the US, use the stick-on label with the "Complies with 21 CFR 1040.10" note.
- Affix the laser information and warning signs near the device if no signs are attached to the device (e.g. because the device is too small) or if the attached laser information and warning signs are concealed due to the installation position.
- Affix the laser information and warning signs so that they are legible without exposing the reader to the laser radiation of the device or other optical radiation.

WARNING!



If the scanner motor fails during the emission of laser radiation, the limit value of laser class 2 in accordance with IEC 60825-1 Edition 2.0 (2007) and Edition 3.0 (2014) could be exceeded. The device has safeguards to prevent this occurrence.

🖖 If the emitted laser beam is at a standstill, immediately disconnect the faulty bar code reader from the voltage supply.

The BCL 95 emits scanned optical radiation at a wavelength of 655 nm (red). Looking at the device's mirror and operating at the lowest scanning rate (400 scans/s) at a viewing distance of 65 mm results in pulses with a pulse duration of 120 µs on the retina of the eye. The total pulse peak power at the exit window is less than 2.1 mW. The average laser power is, thus, less than 1 mW, corresponding to laser class 2 in accordance with EN 60825-1, Edition 2.0 (2007) and IEC 60825-1, Edition 2.0 (2007) and IEC 60825-1, Edition 3.0 (2014).

Accessories

Connection technology - Connection cables

Part no.	Designation	Article	Description
50135121	KD U-M12-8A-P1- 020	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 8 -pin Connector, LED: No Connection 2: Open end Shielded: No Cable length: 2.000 mm Sheathing material: PUR

Mounting technology - Mounting brackets

	Part no.	Designation	Article	Description
5.	50118542	BT 200M.5	Mounting bracket	Design of mounting device: Angle, L-shape Fastening, at system: Through-hole mounting Mounting bracket, at device: Screw type, Suited for M3 screws Type of mounting device: Adjustable Material: Stainless steel

Leuze electronic GmbH + Co.

The Sensor People In der Braike 1, 73277 Owen

Leuze electronic GmbH + Co. KG info@leuze.com • www.leuze.com We reserve the rig In der Braike 1, 73277 Owen Phone: +49 7021 573-0 • Fax: +49 7021 573-199 eng • 2023-02-03

Accessories



Mounting technology - Rod mounts

	Part no.	Designation	Article	Description
1. T.	50119331	BTU 900M-D12	Mounting system	Design of mounting device: Mounting system Fastening, at system: For 12 mm rod, Sheet-metal mounting Mounting bracket, at device: Screw type Type of mounting device: Clampable, Swiveling, Turning, 360° Material: Metal

Note



🔖 A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.