

## Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM Pulse tone 24VAC/DC GN



| Part No.: | 699.320.75 |   |     | ը (Մ <u>Լ</u> ) us | (II) | <b>⊕</b> UK |
|-----------|------------|---|-----|--------------------|------|-------------|
| ies:      | Kompakt 37 | Z | دري | りus                |      | Pus CA      |

| MECHANICAL DATA              |                     |
|------------------------------|---------------------|
| Height                       | 141 mm              |
| Diameter                     | 38 mm               |
| Materials                    | PC                  |
| Dome colour                  | Clear               |
| Housing colour               | Black               |
| Protection category          | IP65                |
| Connection                   | Cable               |
| cross-sectional area maximum | 0,34mm² / 22AWG     |
| Cable entry                  | Membrane grommet    |
| Cable entry minimum          | d = 1 mm            |
| Cable entry maximum          | d = 9  mm           |
| Cable length                 | 2000 mm             |
| Tension relief               | Pull-out protection |
| Type of fixing               | Built-in mounting   |
| Working temperature minimum  | -20°C               |
| Working temperature maximum  | +50°C               |
| Weight with packaging        | 158 g               |
| Product weight               | 128 g               |

| ELECTRICAL DATA             |                             |
|-----------------------------|-----------------------------|
| Operating voltage           | 24V                         |
| Operating voltage type      | AC/DC                       |
| Operating voltage frequency | 50Hz                        |
| Operating voltage tolerance | +/- 10%                     |
| Rated operational voltage   | 24 VDC                      |
| Rated operational current   | 95 mA                       |
| Rated inrush current        | 500 mA                      |
| Protection class            | Protection class 2          |
| Pollution degree            | 3 In the connection area: 2 |

| OPTICAL DATA         |                  |
|----------------------|------------------|
| Light source         | LED              |
| Light colour         | Green<br>Red     |
| Optical signal image | Permanent        |
| Service life optical | 50,000 h maximum |

| ACOUSTIC DATA               |             |
|-----------------------------|-------------|
| Volume (max) at 1m distance | 85,0 dB (A) |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



## Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM Pulse tone 24VAC/DC GN

| Acoustic signal image | Pulse tone      |
|-----------------------|-----------------|
| Audio frequency       | 2900 Hz         |
| Acoustic service life | 5,000 h minimum |


| APPROVAL DATA                 |                       |
|-------------------------------|-----------------------|
| Conforms with CE              | Yes                   |
| Conforms with RoHS directive  | Yes                   |
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | cULus                 |
| UL Type Rating                | Type 12<br>Type 4X    |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

# K37cl sr cable EM Pulse tone 24VAC/DC GN

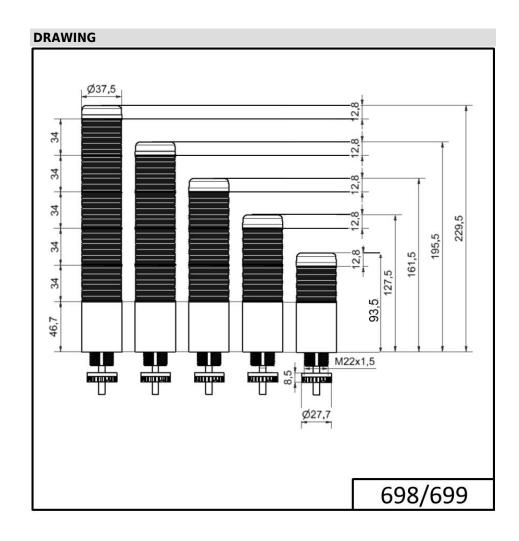

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.