Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC WH



ļ

Part No.: 699.340.75 Series: Kompakt 37 MECHANICAL DATA Height 209 mm Diameter 38 mm Materials PC Dome colour Clear Housing colour Silver Protection category IP65 Connection Cable cross-sectional area maximum 0,34mm² / 22AWG Cable entry Membrane grommet Cable entry maximum d = 1 mm Cable entry maximum d = 9 mm Cable length 2000 mm Tension relief Pull-out protection Type of fixing Built-in mounting Working temperature minimum -20°C Working temperature maximum +50°C Weight with packaging 230 g Product weight 192 g ELECTRICAL DATA CDC Operating voltage 24V Operating voltage tolerance 4/- 10% Rated operational voltage 24 VDC	K A	
Height209 mmDiameter38 mmMaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum192 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage trequency50HzOperating voltage tolerance+/- 10%		
Diameter38 mmMaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage frequency50HzOperating voltage frequence+/- 10%		
MaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Dome colourClearHousing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Housing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum450°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Protection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage trequency50HzOperating voltage frequence+/- 10%		
cross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Cable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmCable lengthPull-out protectionTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Cable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Cable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Cable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Tension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Type of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Working temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Working temperature maximum+50°CWeight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Weight with packaging230 gProduct weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Product weight192 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
ELECTRICAL DATA Operating voltage 24V Operating voltage type AC/DC Operating voltage frequency 50Hz Operating voltage tolerance +/- 10%		
Operating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Operating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%		
Operating voltage frequency50HzOperating voltage tolerance+/- 10%		
Operating voltage tolerance +/- 10%		
Rated operational voltage 24 VDC		
Rated operational current 160 mA		
Rated inrush current 500 mA		
Protection class Protection class 2		
Pollution degree 3		
In the connection area: 2		
OPTICAL DATA		
Light source LED		
Light colour Green		
Red White		
Yellow		
Optical signal image Permanent		
Service life optical 50,000 h maximum		


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC WH

ACOUSTIC DATA	
Volume (max) at 1m distance	85,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC WH

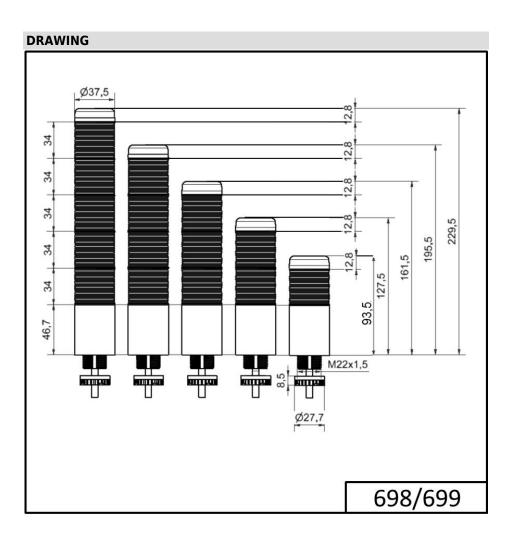

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.