## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC BU



ļ

MECHANICAL DATAHeight243 mmDiameter38 mmMaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature maximum+50°CWorking temperature maximum+50°CWorking temperature maximum+50°COperating voltage24VOperating voltage frequency50HzOperating voltage frequency50HzOperating voltage tolerance+/-10%Rated operational current200 mARated operational current200 mARated operational current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2 <b>OPTICAL DATA</b> LEDLight sourceLEDLight sourceBlue Green Red White YellowOptical signal imagePermanentSonot hermanet50,000 h maximum	Part No.: Series:	699.360.75 Kompakt 37			
Diameter38 mmMaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage typeAC/DCOperating voltage type24 VOCRated operational voltage24 VDCRated operational current200 mARated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	MECHANI	CAL DATA			
MaterialsPCDome colourClearHousing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable entry maximumd = 000 mmCable entry maximum2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage trequency50HzOperating voltage trequency50HzOperating voltage tolerance+/- 10%Rated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent			243 mm		
Dome colourClearHousing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degreeIs a lin the connection area: 2OPTICAL DATAELDLight colourBlue Green Red White YellowOptical signal imagePermanent	Diameter		38 mm		
Housing colourSilverProtection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable entry maximumd = 9 mmCable length2000 mmCable intry mountingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage tolerance+/- 10%Rated operational current200 mARated operational voltage24 VDCRated operational current200 mARated operational current200 mAPollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Materials		PC		
Protection categoryIP65ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage tolerance+/ 10%Rated operational voltage24 VDCRated operational current200 mARated operational current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Dome colour		Clear		
ConnectionCablecross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage trequency50HzOperating voltage tolerance+/- 10%Rated operational current200 mARated operational current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATAEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Housing colour		Silver		
cross-sectional area maximum0,34mm² / 22AWGCable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage frequency50HzOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent			IP65		
Cable entryMembrane grommetCable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage typeAC/DCOperating voltage trequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent			Cable		
Cable entry minimumd = 1 mmCable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltageOperating voltage frequency50HzOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourBlue Red White YellowOptical signal imagePermanent	cross-sectional area maximum		0,34mm² / 22AWG		
Cable entry maximumd = 9 mmCable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATAEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Cable entry		Membrane grommet		
Cable length2000 mmTension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	-		d = 1 mm		
Tension reliefPull-out protectionType of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Cable entry maximum		d = 9 mm		
Type of fixingBuilt-in mountingWorking temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 <bbr></bbr> In the connection area: 2OPTICAL DATAEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Cable length		2000 mm		
Working temperature minimum-20°CWorking temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATAELDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Tension relief		Pull-out protection		
Working temperature maximum+50°CWeight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Type of fixing		Built-in mounting		
Weight with packaging244 gProduct weight205 gELECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Working temperature minimum		-20°C		
Product weight205 gELECTRICAL DATA24VOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 <bbr></bbr> In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Working temperature maximum		+50°C		
FLECTRICAL DATAOperating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Weight witl	n packaging	244 g		
Operating voltage24VOperating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2 <b>OPTICAL DATA</b> LEDLight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Product weight		205 g		
Operating voltage typeAC/DCOperating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	ELECTRICAL DATA				
Operating voltage frequency50HzOperating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Operating voltage		24V		
Operating voltage tolerance+/- 10%Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Operating	voltage type	AC/DC		
Rated operational voltage24 VDCRated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Operating voltage frequency		50Hz		
Rated operational current200 mARated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Operating voltage tolerance		+/- 10%		
Rated inrush current500 mAProtection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Rated operational voltage		24 VDC		
Protection classProtection class 2Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Rated oper	ational current	200 mA		
Pollution degree3 In the connection area: 2OPTICAL DATALight sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Rated inrush current		500 mA		
In the connection area: 2   OPTICAL DATA   Light source LED   Light colour Blue Green Red White Yellow   Optical signal image Permanent	Protection class		Protection class 2		
Light sourceLEDLight colourBlue Green Red White YellowOptical signal imagePermanent	Pollution degree				
Light colour Blue Green Red White Yellow Optical signal image	OPTICAL DATA				
Green   Red   White   Yellow   Optical signal image	Light source		LED		
	Light colour		Green Red White		
Service life optical 50,000 h maximum	Optical signal image		Permanent		
	Service life optical		50,000 h maximum		


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC BU

ACOUSTIC DATA	
Volume (max) at 1m distance	85,0 dB (A)
Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr cable EM Pulse tone 24VAC/DC BU

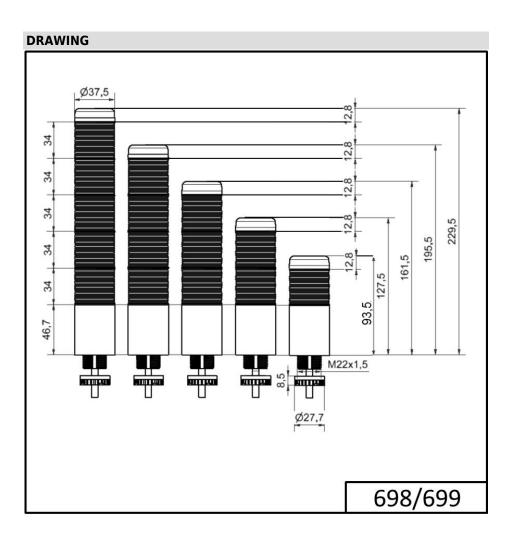

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.