

Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM Pulse tone 24VAC/DC GN/



| Part No.: | 699.420.75 | _ | | (ŪL) _{us} | (L) | M. UK | (II) UK |
|-----------|------------|---|---|--------------------|-----|--------|---------|
| Series: | Kompakt 37 | 7 | c | y us | | Yus CA | |

| MECHANICAL DATA | | |
|-----------------------------|---------------------|--|
| Height | 141 mm | |
| Diameter | 38 mm | |
| Materials | PC | |
| Dome colour | Clear | |
| Housing colour | Black | |
| Protection category | IP65 | |
| Connection | M12 plug 5-pole | |
| Cable entry | Membrane grommet | |
| Cable entry minimum | d = 1 mm | |
| Cable entry maximum | d = 9 mm | |
| Cable length | 150 mm | |
| Tension relief | Pull-out protection | |
| Type of fixing | Built-in mounting | |
| Working temperature minimum | -20°C | |
| Working temperature maximum | +50°C | |
| Weight with packaging | 116 g | |
| Product weight | 76 g | |

| ELECTRICAL DATA | |
|-----------------------------|-----------------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 95 mA |
| Rated inrush current | 500 mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 In the connection area: 2 |

| OPTICAL DATA | | |
|----------------------|------------------|--|
| Light source | LED | |
| Light colour | Green Red | |
| Optical signal image | Permanent | |
| Service life optical | 50,000 h maximum | |

| ACOUSTIC DATA | | |
|-----------------------------|-------------|--|
| Volume (max) at 1m distance | 85,0 dB (A) | |
| Acoustic signal image | Pulse tone | |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM Pulse tone 24VAC/DC GN/


| Audio frequency | 2900 Hz |
|-------------------------------|------------------------|
| Acoustic service life | 5,000 h minimum |
| Acoustic service life | 3,000 II IIIIIIIIIIIII |
| APPROVAL DATA | |
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 |
| | Type 4X |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37cl sr plug EM Pulse tone 24VAC/DC GN/

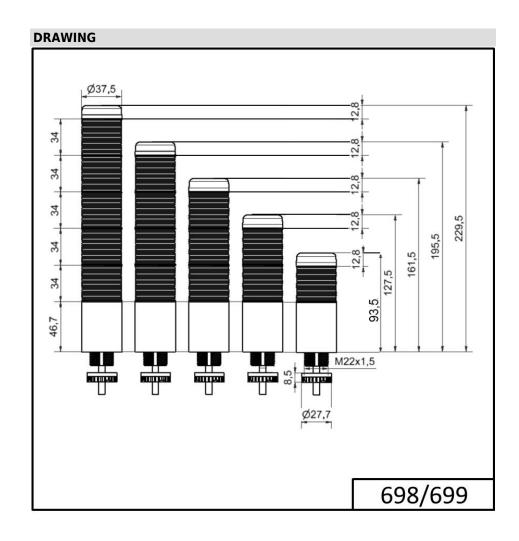

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.