Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC WH/



ļ

Part No.:	699.440.75			
Series:	Kompakt 37			
MECHANICAL DATA				
Height		20	09 mm	
Diameter		3	3 mm	
Materials		P	2	
Dome colour		C	ear	
Housing colour		Si	lver	
Protection category		IP	65	
Connection		М	12 plug 8-pole	
Cable entry		М	embrane grommet	
Cable entry minimum			= 1 mm	
Cable entry maximum		d	= 9 mm	
Tension relief		Pi	ull-out protection	
Type of fixing		В	uilt-in mounting	
Working temperature minimum		mum -2	0°C	
Working temperature maximum		imum +	50°C	
Weight with packaging		1	56 g	
Product weight		10)2 g	
ELECTRIC	ΔΙ ΠΔΤΔ			
Operating voltage		2	4V	
Operating voltage type			C/DC	
Operating voltage frequency)Hz	
Operating voltage tolerance		- ,	/- 10%	
• •	ational voltage		4 VDC	
Rated operational current			50 mA	
Rated inrush current			00 mA	
Protection class		-	rotection class 2	
Pollution degree		3	the connection area: 2	
OPTICAL D	DATA			
Light source		LE	ED	
Light colour		G R W	reen ed 'hite ellow	
Optical signal image		Pe	ermanent	
Service life optical		50	0,000 h maximum	
ACOUSTIC DATA				
volume (m	ax) at 1m distaı	1Ce 8	5,0 dB (A)	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC WH/

Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC WH/

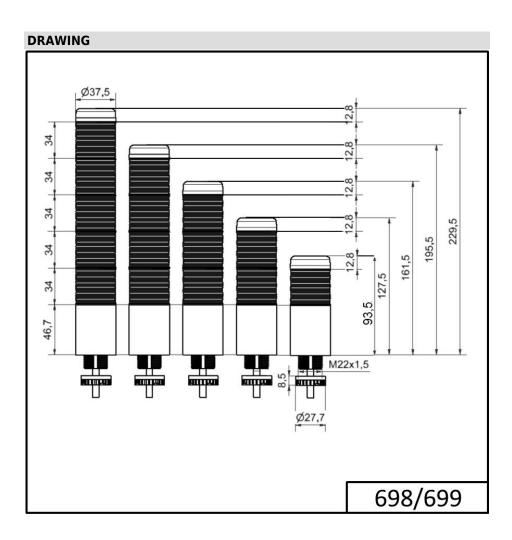

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.