

KombiSIGN 71 / WIN

WIN slave performance KS 71 24VAC/DC BK



Part No.: 860.640.12



| MECHANICAL DATA | |
|-----------------------------|-------|
| Height | 66 mm |
| Diameter | 70 mm |
| Materials | PC |
| Housing colour | Black |
| Protection category | IP65 |
| Connection | USB |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 102 g |
| Product weight | 80 g |

| ELECTRICAL DATA | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | AC/DC |
| Operating voltage frequency | 50Hz |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 40 mA |
| Rated inrush current | 430 mA |
| Protection class | Protection class 2 |
| Pollution degree | 2 |
| connectivity | WIN |

| OPTICAL DATA | |
|----------------------|------------------|
| Service life optical | 50,000 h maximum |

| APPROVAL DATA | |
|-------------------------------|-----------------------|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.




KombiSIGN 71 / WIN

WIN slave performance KS 71 24VAC/DC BK

| Conforms with DNV | No |
|-----------------------|----|
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

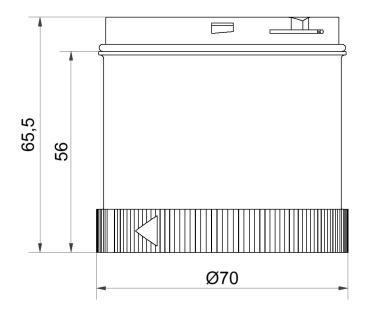

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.