


# East Coast Sensors

## Brass Bracket RTD Series RC3

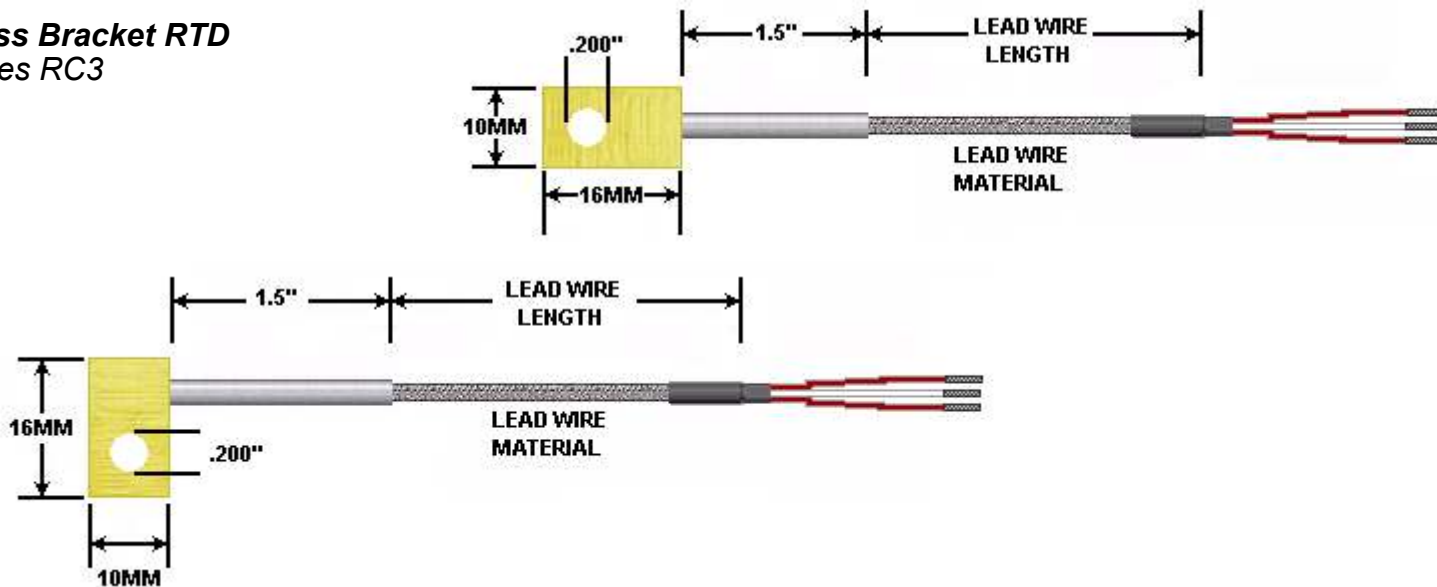

### Ordering Information Part Number

① RC3	② Element type	③ Element Accuracy (0 °C)	④ Wire Configuration	⑤ Bracket Type	⑥ Lead wire material	⑦ Lead wire Length (In.)	⑧ Termination Style	⑨ Special Features
RC3								

### Optional

② Element type	
T	100 Ω DIN 00385 (thin film)
U	500 Ω DIN 00385 (thin film)
W	1000 Ω DIN 00385 (thin film)
X	120 Ω Nickel DIN 00672 (thin film)
Y	100 Ω DIN 003916 (wire wound)
Z	500 Ω DIN 003916 (wire wound)
Q	10 Ω copper (thin film)

③ Element Accuracy (0 °C)	
A	Class A (0.06%)
B	Class B (0.12%)

④ Wire Configuration	
2	2-wire
3	3-wire
4	4-wire
5	2-wire (Dual)
6	3-wire (Dual)

⑤ Bracket type	
X	Straight brass mounting bracket (10MM wide x 16MM long)
Z	90 degree brass mounting bracket (10MM wide x 16MM long)

⑥ Lead wire material	
A	Fiberglass (800°F)
B	Fluoropolymer (400°F)
C	Fiberglass with stainless steel braid (800°F)
D	Fluoropolymer with stainless steel braid (400°F)
E	Fiberglass with armor cable (800°F)
F	Fluoropolymer with armor cable (400°F)

⑦ Lead wire length	
006-600"	Specify in Inches
	<b>Over 600" contact factory</b>

⑧ Termination style	
A	2" stripped leads (bare ends) (standard)
B	2" stripped leads w/ #8 spade lugs
C	Standard male 2 pin plug (400°F)
D	Standard male 3 pin plug (400°F)
F	Standard 2 pin female jack (400°F)
G	Standard 3 pin female jack (400°F)
H	Miniature male 2 pin plug (400°F)
P	Miniature male 3 pin plug (400°F)
J	Miniature female 2 pin jack (400°F)
K	Miniature female 3 pin jack (400°F)
W	2" stripped leads w/ pin terminals
Q	2" stripped leads w/ wire ferrules
R	Dual molded male 4 pin plug (400°F)(for dual 2 wire)
T	Dual molded female 4 hole jack (400°F)(for dual 2 wire)
X	Extra long lead wire length (beyond 2" stripped leads) <b>(specify extra long lead wire length below)</b>
006"-240"	006"-240" Specify in Inches

### Optional

⑨ Special features	
Note	<b>Leave blank for no special features</b>
02	1.5" long strain relief spring
03	1.5" long heat shrink where wire exits the probe
06	Epoxy seal (500°F)
07	Cable clamp
08	BX Connector
09	Mating connector

