



2021
PRODUCT
GUIDE
LAMPS & FIXTURES

we know light.™

TABLE OF CONTENTS

INDOOR LED LUMINAIRES 2-17

LED CCT SELECTABLE BACK-LIT DIRECT TROFFER LUMINAIRES	3
LED DIRECT TROFFER FLAT PANELS	4-5
LUXTERIOR LED CCT SELECTABLE VOLUMETRIC LUMINAIRES	6
LUXTERIOR LED FIXED WATTAGE VOLUMETRIC LUMINAIRES	6-7
LED HB SERIES LINEAR HIGH BAY LUMINAIRES	8
LED IB SERIES LINEAR HIGH BAY LUMINAIRES	9
SMARTSTUFF SMARTBOX LUMINAIRE ACCESSORIES	9
LED UFO HIGH BAY LUMINAIRES	10
LED ROUND HIGH BAY LUMINAIRES, GENERATION 3	10
INDUSTRA LED HBM SERIES MODULAR HIGH BAY	10
LED VAPOR TIGHT	11
LED WRAP LIGHT	11
LED GENERAL PURPOSE STRIP/ LOW BAY LUMINAIRES	12
LED GENERAL PURPOSE STRIP RETROFIT KIT	12
LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHTS	13
LED FLAT SELECTABLE RECESSED DOWNLIGHTS	14
LED BEVELED SELECTABLE RECESSED DOWNLIGHTS	14
LED COLOR SELECTABLE SNAP-IN DOWNLIGHTS	14
LED COLOR SELECTABLE EDGE-LIT SNAP-IN DOWNLIGHTS	14
LED RECESSED 4" HI CRI CQ DOWNLIGHTS	15
LED RECESSED 5/8" HI CRI CQ DOWNLIGHTS	15
LED JUNCTION BOX 5/8" DOWNLIGHTS	15
LED DELUX SERIES ROUND SNAP-IN 6" DOWNLIGHTS	15
LED DELUX SERIES ROUND SNAP-IN TRIM RINGS	15
LED RECESSED 4" DOWNLIGHTS	16
LED RECESSED 5/8" DOWNLIGHTS	16
LED SQUARE SNAP-IN 4" DOWNLIGHTS	16
LED SQUARE SNAP-IN 6" DOWNLIGHTS	16
LED SQUARE SNAP-IN 8" DOWNLIGHTS	16
LED ROUND SNAP-IN 4" DOWNLIGHTS	17
LED ROUND SNAP-IN 6" DOWNLIGHTS	17
LED ROUND SNAP-IN 8" DOWNLIGHTS	17
LED ALLUSION RECESSED 5/8" DOWNLIGHTS	17

OUTDOOR LED LUMINAIRES 18-23

LED SELECT SERIES WALL PACKS	19
LED NON-CUTOFF WALL PACKS, ACRYLIC LENS	19
LED ADJUSTABLE WALL PACKS	19
LED CANOPY LIGHTS	20
LED FLOOD LIGHTS	20
LED POST TOP	21
LED BARN LIGHT LUMINAIRES	21
LED SECURITY LIGHT LUMINAIRE	21
LED AREA LIGHT LUMINAIRES, GEN 2	22-23

HORTICULTURE LIGHTING 24-25

HORTICULTURE LED VAPOR TIGHT	25
HTM SERIES MODULAR HORTICULTURE LED TOP LIGHT	25
HORTICULTURE LED STARLIGHT	25

SMARTSTUFF™ CONTROLS 26-27

SMARTSTUFF™ LED BLUETOOTH® LAMPS	27
SMARTSTUFF SMARTBOX LED BLUETOOTH LUMINAIRE ACCESSORIES	27

LED FILAMENT LAMPS 28-39

LED DIMMABLE HIGH CRI FILAMENT A19 LAMPS	29
LED DIMMABLE HIGH CRI FILAMENT FB11 LAMPS	29-30
LED NON-DIMMABLE SHAPE FILAMENT A19 LAMPS	31-32
LED NON-DIMMABLE SHAPE FILAMENT G40 LAMPS	32
LED DIMMABLE FILAMENT A15 LAMPS	33
LED DIMMABLE FILAMENT A19 LAMPS	33
LED DIMMABLE FILAMENT COLORED GLASS A19 LAMPS	33
LED DIMMABLE FILAMENT SILVER BOWL A19 LAMPS	33
LED AMBERGLOW 24K DIMMABLE DECO LAMPS	34
LED AMBERGLOW 24K DIMMABLE A19 LAMPS	35
LED AMBERGLOW 24K DIMMABLE ST19 LAMPS	35
LED AMBERGLOW 24K DIMMABLE G40 LAMPS	35
LED AMBERGLOW 24K DIMMABLE G25 LAMPS	35
LED AMBERGLOW 24K DIMMABLE G16 DECO LAMPS	35
LED DIMMABLE GOOD LIFE A15 LAMPS	36
LED DIMMABLE GOOD LIFE A19 LAMPS	36
LED DIMMABLE GOOD LIFE R20 LAMPS	36
LED DIMMABLE GOOD LIFE BR30 LAMPS	36
LED DIMMABLE GOOD LIFE DECO LAMPS	36
LED DIMMABLE GOOD LIFE G25 LAMPS	36
LED DIMMABLE GOOD LIFE G40 LAMPS	36
LED DIMMABLE GOOD LIFE ST19 LAMPS	36
LED DIM SOFT ANTIQUE CLASSIC FILAMENT A19 LAMPS	37
LED DIM SOFT ANTIQUE CLASSIC FILAMENT B11 DECO LAMPS	37
LED DIM SOFT ANTIQUE CLASSIC FILAMENT F11 DECO LAMPS	37
LED DIM SOFT ANTIQUE CLASSIC FILAMENT G25 LAMPS	37
LED DIM SOFT ANTIQUE CLASSIC FILAMENT ST19 LAMPS	37
LED DIM SOFT ANTIQUE CLASSIC FILAMENT T10 LAMPS	37
LED DIM SOFT ANTIQUE CLASSIC FILAMENT T6 LAMPS	37
LED DIM SOFT ANTIQUE SPIRAL FILAMENT A19 LAMPS	38
LED DIM SOFT ANTIQUE SPIRAL FILAMENT B11 DECO LAMPS	38
LED DIM SOFT ANTIQUE SPIRAL FILAMENT G30 LAMPS	38
LED DIM SOFT ANTIQUE SPIRAL FILAMENT G40 LAMPS	38
LED DIM SOFT ANTIQUE SPIRAL FILAMENT ST19 LAMPS	38
LED DIM SOFT ANTIQUE SPIRAL FILAMENT T9 LAMPS	38
LED DIM CLASSIC FILAMENT T6 T-LAMPS	39
LED DIM CLASSIC FILAMENT T10 T-LAMPS	39
LED DIM CLASSIC FILAMENT T25 T-LAMPS	39
LED DIM CLASSIC FILAMENT T30 T-LAMPS	39

LED LAMPS 40-73

LED HIGH LUMEN DIMMABLE ELITE PAR38	41
LED HIGH OUTPUT DIMMABLE ELITE PAR38	42
LED DIMMABLE ELITE PAR38	43-44
LED DIMMABLE ELITE PAR30	45-46
LED DIMMABLE ELITE PAR30 SHORT NECK	47
LED DIMMABLE ELITE PAR20	48
LED DIMMABLE SMD PAR38	49
LED DIMMABLE SMD PAR30	50
LED DIMMABLE SMD PAR30 SHORT NECK	50
LED DIMMABLE SMD PAR20	50
LED HIGH OUTPUT, HIGH CRI DIMMABLE ELITE PAR38	51
LED HIGH CRI DIMMABLE ELITE PAR38	51
LED HIGH CRI DIMMABLE ELITE PAR30	51
LED HIGH CRI DIMMABLE ELITE PAR30 SHORT NECK	51
LED DIMMABLE ELITE BR40	52
LED DIMMABLE ELITE BR30	52

LED DIMMABLE ELITE R20	52
LED DIMMABLE ELITE BR30 2 PACK	53
LED NON DIMMABLE ELITE BR40	53
LED NON DIMMABLE ELITE BR30	53
LED DIMMABLE ELITE AMBER LENS BR30	53
LED DIMMABLE ELITE OMNIDIRECTIONAL A-LAMPS	54-56
LED NON DIMMABLE OMNIDIRECTIONAL A-LAMPS	54-56
LED NON DIMMABLE GENERAL PURPOSE A-LAMPS	54-56
LED DIMMABLE ELITE GU24 BASED A-LAMPS	57
LED DIMMABLE ELITE WET LOCATION OMNI A-LAMPS	57
LED DIMMABLE ELITE THREE WAY A-LAMPS	57
LED DIMMABLE ELITE VALUE GU5.3 MR16	58
LED DIMMABLE ELITE HIGH CRI GU5.3 MR16	58
LED DIMMABLE ELITE GU10 MR16	59
LED DIMMABLE ELITE PART 6	59
LED DIMMABLE ELITE G25	60
LED NON DIMMABLE WET LOCATION S14	60
LED 5W DECO LAMPS	61
LED 4W DECO LAMPS	62
LED NON DIMMABLE 120-277V A23 LAMPS	63
LED NON DIMMABLE 120-277V A21 LAMPS	63
LED NON DIMMABLE 120-277V A19 LAMPS	63
LED NON DIMMABLE 120-277V BR30 LAMPS	64
LED NON DIMMABLE 120-277V PAR38 LAMPS	64
LED DIMMABLE ALLUSION PAR38 LAMPS	65
LED DIMMABLE ALLUSION PAR30 LAMPS	65
LED DIMMABLE ALLUSION PAR20 LAMPS	65
LED DIMMABLE ALLUSION MR16 LAMPS	65
LED DIMMABLE ALLUSION SL16 LAMPS	65
LED DIMMABLE ALLUSION 5/8" DOWNLIGHTS	65
LED DIMMABLE ALLUSION BR30 LAMPS	65
LED DIMMABLE ALLUSION A19 LAMPS	65
LED DIMMABLE ALLUSION B11 DECO LAMPS	65
LED DIMMABLE PROLINE PAR38 LAMPS	66
LED DIMMABLE PROLINE PAR30 LAMPS	66
LED DIMMABLE PROLINE PAR20 LAMPS	66
LED DIMMABLE PROLINE BR40 LAMPS	66
LED DIMMABLE PROLINE BR30 LAMPS	66
LED DIMMABLE PROLINE R20 LAMPS	66
LED DIMMABLE PROLINE ALL GLASS G25 LAMPS	67
LED DIMMABLE PROLINE ALL GLASS B11 LAMPS	67
LED DIMMABLE PROLINE ALL GLASS A19 LAMPS	67
LED NON DIMMABLE PROLINE ALL GLASS A19 LAMPS	67
LED DIMMABLE PROLINE A19 LAMPS	67
LED NON DIMMABLE PROLINE A19 LAMPS	67
LED DIMMABLE VERTICAL BR30 PL TYPE A LAMPS	68
LED DIMMABLE VERTICAL BR40 PL TYPE A LAMPS	68
LED NON DIMMABLE QUAD PL LAMPS	69
LED NON DIMMABLE PL 3U LAMPS	69
LED NON DIMMABLE PLL LAMPS	70
LED DIMMABLE ROTATING HORIZONTAL SHAPE LAMPS	70
LED NON DIMMABLE PL TYPE B LAMPS	70-71
LED NON DIMMABLE PL 2U LAMPS	70
LED DIMMABLE ADJUSTABLE SHAPE PL TYPE AB LAMPS	71
LED NON DIMMABLE PL LAMPS GU24 BASE	72
LED DIMMABLE ACCENT LAMPS	73
LED NON DIMMABLE ACCENT LAMPS	73
LED ELEVATOR LAMPS	73

STARLIGHT SERIES LAMPS 74-75

LED DIMMABLE STARLIGHT SERIES SL13 LAMPS	75
LED DIMMABLE STARLIGHT SERIES SL16 LAMPS	75
LED DIMMABLE STARLIGHT SERIES SL19 LAMPS	75
LED DIMMABLE STARLIGHT SERIES SL22 LAMPS	75
STARLIGHT MATCHING PENDANT MOUNTS.....	75

LED HID REPLACEMENT LAMPS 76-81

LED HID REPLACEMENT LAMP, E26 AND EX39 BASES.....	77-78
LED HID REPLACEMENT AREA LAMP, E26 AND EX39 BASES.....	78
LED HID REPLACEMENT CORN COB LAMP, E26 AND EX39 BASES	79-80
LED HID CORN COB LAMP SENSORS	81

LED T8 AND T5 TUBES 82-93

LIBERAT8™ LED BALLAST BYPASS 4 FT ALL GLASS TUBES.....	83
LIBERAT8™ LED BALLAST BYPASS 4 FT PET COATED GLASS TUBES	83
LIBERAT8™ LED BALLAST BYPASS 3 FT PET COATED GLASS TUBES	83
LIBERAT8™ LED BALLAST BYPASS 2 FT PET COATED GLASS TUBES	83
LIBERAT8™ LED BYPASS 8 FT GLASS TUBES, R17D BASE	84
LIBERAT8™ LED BYPASS 8 FT GLASS TUBES, FA8 BASE	84
LIBERAT8™ LED BALLAST BYPASS 2 FT U-BEND PLASTIC TUBES.....	84
LIBERAT8™ LED HIGH OUTPUT BALLAST BYPASS 4 FT GLASS TUBES	85
LIBERAT5™ LED HIGH OUTPUT BALLAST BYPASS 2 FT GLASS TUBES	86
LIBERAT5™ LED HIGH OUTPUT BALLAST BYPASS 3 FT GLASS TUBES	86
LIBERAT5™ LED HIGH OUTPUT BALLAST BYPASS 4 FT GLASS TUBES	86
LIBERAT5™ LED BALLAST BYPASS 2 FT GLASS TUBES.....	86
LIBERAT5™ LED BALLAST BYPASS 3 FT GLASS TUBES.....	86
LIBERAT5™ LED BALLAST BYPASS 4 FT GLASS TUBES.....	86
DIRECT8™ LED INSTANT START 4 FT GLASS TUBES.....	87
DIRECT8™ LED IS HIGH CRI 4 FT GLASS TUBES	87
DIRECT8™ LED IS HIGH OUTPUT 4 FT PET COATED GLASS TUBES.....	88
DIRECT8™ LED IS HIGH EFFICACY 4 FT GLASS TUBES.....	88
DIRECT8™ LED IS HIGH EFFICACY 4 FT GLASS TUBES BULK.....	88
DIRECT8™ LED IS/RS HIGH EFFICACY 3 FT GLASS TUBES.....	88
DIRECT8™ LED IS/RS HIGH EFFICACY 2 FT GLASS TUBES.....	88
DIRECT8™ LED IS 4 FT SHATTERPROOF PLASTIC TUBES BULK	89
DIRECT8™ LED IS/RS 4 FT SHATTERPROOF GLASS TUBES	89
DIRECT8™ LED IS/RS U-BEND 6 INCH PLASTIC TUBES.....	89
DIRECT5™ LED ELEC. BALLAST 4 FT SHATTERPROOF GLASS TUBES	90
LED T8 TYPE AB 4 FT GLASS TUBES.....	90
LED T8 TYPE AB 4 FT SHATTERPROOF COATED TUBES	90
CORRELAT8 LED T8 4 FT TYPE C TUBES, G13 BASE	91
CORRELAT5 LED T5 4 FT TYPE C TUBES, G13 BASE, ITEMS HO.....	91
CORRELAT5 LED T5 4 FT TYPE C TUBES, G13 BASE, ITEMS HE.....	91
PROLINE INSTANT START COMPATIBLE T8 TUBES, TYPE A	92
PROLINE INSTANT START 4 FT U-BEND PLASTIC TUBE	92
PROLINE INSTANT START COMPATIBLE T8 TUBES, TYPE B	92
PROLINE INSTANT START COMPATIBLE T8 TUBES, TYPE AB	92
T8 READY ELITE HIGH BAY.....	93
LED MAGNETIC RETROFIT KITS	93

CFL LAMPS 94-97

CFL PRO SERIES T3 FULL SPRINGLAMPS®	95
CFL PRO SERIES T2 FULL SPRINGLAMPS®	95
CFL SPRINGLAMPS®, MOGUL BASE.....	95
CFL SPRINGLIGHT™ SPRINGLAMPS®	96
T6 CIRCLINE LAMPS	97
T9 CIRCLINE LAMPS	97
CIRCLINE BALLASTS.....	97
CFL SPRINGLAMPS®, GU24 BASE	97

EXIT AND EMERGENCY 98-100

EMERGENCY LIGHTING/EXIT SIGN REMOTE HEAD LIGHTS.....	99
STANDARD EMERGENCY LIGHTS	99
LED EXIT SIGNS	99
LED DIECAST EXIT SIGNS	99
LED COMBO EXIT SIGNS	100
EXIT SIGN LED RETROFITS	100
BATTERIES	100
WIRE GUARDS	100






INDOOR LED LUMINAIRES

Whether you're looking for high bay luminaires, troffers, general purpose strips or a recessed commercial downlight, TCP offers you a full complement of Indoor LED luminaire products.

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Options
50,000 HOUR LED CCT SELECTABLE BACK-LIT DIRECT TROFFER LUMINAIRES										
2x2 LED CCT SELECTABLE BACK-LIT DIRECT TROFFER FLAT PANELS – FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL										
DTF2UZD23CCT	23 W CCT Selectable Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	23	2600	113	3500 4100 5000	>80	50,000	
DTF2UZD29CCT	29 W CCT Selectable Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	29	3200	110.3	3500 4100 5000	>80	50,000	Single Pack, Assembled
DTF2UZD38CCT	38 W CCT Selectable Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	38	4200	110.5	3500 4100 5000	>80	50,000	
2x4 LED CCT SELECTABLE BACK-LIT DIRECT TROFFER FLAT PANELS – FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL										
DTF4UZD29CCT	29 W CCT Selectable Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	29	3300	113.8	3500 4100 5000	>80	50,000	
DTF4UZD39CCT	39 W CCT Selectable Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	39	4400	112.8	3500 4100 5000	>80	50,000	Single Pack, Assembled
DTF4UZD46CCT	46 W CCT Selectable Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	46	5100	110.9	3500 4100 5000	>80	50,000	
1x4 LED CCT SELECTABLE BACK-LIT DIRECT TROFFER FLAT PANELS – FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL										
DTF1UZD23CCT	23 W CCT Selectable Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	23	2600	113	3500 4100 5000	>80	50,000	
DTF1UZD29CCT	29 W CCT Selectable Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	29	3200	110.3	3500 4100 5000	>80	50,000	Single Pack, Assembled
DTF1UZD38CCT	38 W CCT Selectable Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	38	4200	110.5	3500 4100 5000	>80	50,000	



AVAILABLE ACCESSORIES (ordered separately)

- YHANGER6PK** – Y Fit Cable Hanger 6 Pack
- DRVEXTCABLE** – 3 FT Driver Extension Cable

- DTSK1** – 1X4 Direct Troffer Surface Mount Kit (White)
- DTSK2** – 2X2 Direct Troffer Surface Mount Kit (White)
- DTSK4** – 2X4 Direct Troffer Surface Mount Kit (White)

- DTFLK1** – 1X4 Recess Mount Flange Kit
- DTFLK2** – 2X2 Recess Mount Flange Kit
- DTFLK4** – 2X4 Recess Mount Flange Kit

50,000 HOUR LED DIRECT TROFFER LUMINAIRE (CONSULT SPEC SHEET FOR ORDERING MATRIX)

2x2 LED FIXED WATTAGE BACK-LIT DIRECT TROFFER FLAT PANELS – FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL



DTF2UZD2330K	23W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	23	2600	113	3000	>80	50,000	
DTF2UZD2335K	23W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	23	2600	113	3500	>80	50,000	
DTF2UZD2341K	23W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	23	2600	113	4100	>80	50,000	SBS -
DTF2UZD2350K	23W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	23	2600	113	5000	>80	50,000	Factory Installed
DTF2UZD2930K	29W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	29	3200	110.3	3000	>80	50,000	Smart Box w/ Sensor
DTF2UZD2935K	29W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	29	3200	110.3	3500	>80	50,000	SM - Smart
DTF2UZD2941K	29W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	29	3200	110.3	4100	>80	50,000	Box
DTF2UZD2950K	29W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	29	3200	110.3	5000	>80	50,000	EB -
DTF2UZD3830K	38W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	38	4200	110.5	3000	>80	50,000	Emergency Back-Up
DTF2UZD3835K	38W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	38	4200	110.5	3500	>80	50,000	
DTF2UZD3841K	38W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	38	4200	110.5	4100	>80	50,000	
DTF2UZD3850K	38W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	38	4200	110.5	5000	>80	50,000	

2x4 LED FIXED WATTAGE BACK-LIT DIRECT TROFFER FLAT PANELS – FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL



DTF4UZD2930K	29W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	29	3300	113.8	3000	>80	50,000	
DTF4UZD2935K	29W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	29	3300	113.8	3500	>80	50,000	
DTF4UZD2941K	29W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	29	3300	113.8	4100	>80	50,000	SBS -
DTF4UZD2950K	29W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	29	3300	113.8	5000	>80	50,000	Factory Installed
DTF4UZD3930K	39W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	39	4400	112.8	3000	>80	50,000	Smart Box w/ Sensor
DTF4UZD3935K	39W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	39	4400	112.8	3500	>80	50,000	SM - Smart
DTF4UZD3941K	39W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	39	4400	112.8	4100	>80	50,000	Box
DTF4UZD3950K	39W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	39	4400	112.8	5000	>80	50,000	EB -
DTF4UZD4630K	46W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	46	5100	110.9	3000	>80	50,000	Emergency Back-Up
DTF4UZD4635K	46W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	46	5100	110.9	3500	>80	50,000	
DTF4UZD4641K	46W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	46	5100	110.9	4100	>80	50,000	
DTF4UZD4650K	46W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	46	5100	110.9	5000	>80	50,000	

AVAILABLE ACCESSORIES (ordered separately)

YHANGER6PK – Y Fit Cable Hanger 6 Pack
DRVEXTCABLE – 3 FT Driver Extension Cable

DTSK1 – 1X4 Direct Troffer Surface Mount Kit (White)
DTSK2 – 2X2 Direct Troffer Surface Mount Kit (White)
DTSK4 – 2X4 Direct Troffer Surface Mount Kit (White)

DTFLK1 – 1X4 Recess Mount Flange Kit
DTFLK2 – 2X2 Recess Mount Flange Kit
DTFLK4 – 2X4 Recess Mount Flange Kit

¹ Actual wattage may vary by +/- 10%.

² Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

For the most up-to-date specs and warranty information, please visit www.tpci.com

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Options
-------------	------------------	---------	---------	----------------------	---------------------	-----	--------	-----	------------------	---------

50,000 HOUR LED DIRECT TROFFER LUMINAIRES (CONTINUED)

1x4 LED FIXED WATTAGE BACK-LIT DIRECT TROFFER FLAT PANELS – FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL

DTF1UZD2330K	23W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	23	2600	113	3000	>80	50,000	
DTF1UZD2335K	23W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	23	2600	113	3500	>80	50,000	
DTF1UZD2341K	23W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	23	2600	113	4100	>80	50,000	
DTF1UZD2350K	23W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	23	2600	113	5000	>80	50,000	
DTF1UZD2930K	29W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	29	3200	110.3	3000	>80	50,000	SBS - Factory Installed
DTF1UZD2935K	29W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	29	3200	110.3	3500	>80	50,000	Smart Box w/ Sensor
DTF1UZD2941K	29W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	29	3200	110.3	4100	>80	50,000	SM - Smart Box
DTF1UZD2950K	29W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	29	3200	110.3	5000	>80	50,000	Emergency Back-Up
DTF1UZD3830K	38W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	38	4200	110.5	3000	>80	50,000	
DTF1UZD3835K	38W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	38	4200	110.5	3500	>80	50,000	
DTF1UZD3841K	38W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	38	4200	110.5	4100	>80	50,000	
DTF1UZD3850K	38W Flat Panel, 1x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	38	4200	110.5	5000	>80	50,000	



.5x4 LED FIXED WATTAGE BACK-LIT DIRECT TROFFER FLAT PANELS – FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL

DTF405UZD2330K	23W Flat Panel, .5x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	23	2100	91.3	3000	>80	50,000	
DTF405UZD2335K	23W Flat Panel, .5x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	23	2100	91.3	3500	>80	50,000	
DTF405UZD2341K	23W Flat Panel, .5x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	23	2100	91.3	4100	>80	50,000	
DTF405UZD2350K	23W Flat Panel, .5x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	23	2100	91.3	5000	>80	50,000	



AVAILABLE ACCESSORIES (ordered separately)

YHANGER6PK – Y Fit Cable Hanger 6 Pack
DRVEXTCABLE – 3 FT Driver Extension Cable

DTSK1 – 1X4 Direct Troffer Surface Mount Kit (White)
DTSK2 – 2X2 Direct Troffer Surface Mount Kit (White)
DTSK4 – 2X4 Direct Troffer Surface Mount Kit (White)

DTFLK1 – 1X4 Recess Mount Flange Kit
DTFLK2 – 2X2 Recess Mount Flange Kit
DTFLK4 – 2X4 Recess Mount Flange Kit



Many items are DLC QPL.
 Visit www.designlights.org/qpl for a full listing.

¹ Actual wattage may vary by +/- 10%.

² Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

For the most up-to-date specs and warranty information, please visit www.tcpi.com



Item Number

Item Description

Voltage

Dimming

Wattage¹

Lumens²

LPW

CCT(K)

CRI

Rated Life (hrs)

Options

50,000 HOUR LED DESIGNER SERIES CCT SELECTABLE VOLUMETRIC LUMINAIRES

2x2 DESIGNER SERIES CCT SELECTABLE VOLUMETRIC LUMINAIRES DAMP LOCATION RATED, SHIPPED FULLY ASSEMBLED



Luxterior
by TCP

TRV2UZD23CCT	23W CCT Selectable Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	23	2600	113	3500 4100 5000	>80	50,000
TRV2UZD29CCT	29W CCT Selectable Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	29	3200	110.3	3500 4100 5000	>80	50,000
TRV2UZD38CCT	38W CCT Selectable Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	38	4200	110.5	3500 4100 5000	>80	50,000

2x4 DESIGNER SERIES CCT SELECTABLE VOLUMETRIC LUMINAIRES DAMP LOCATION RATED, SHIPPED FULLY ASSEMBLED



Luxterior
by TCP

TRV4UZD23CCT	23W CCT Selectable Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	23	2600	113	3500 4100 5000	>80	50,000
TRV4UZD29CCT	29W CCT Selectable Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	29	3200	110.3	3500 4100 5000	>80	50,000
TRV4UZD38CCT	38W CCT Selectable Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming	120-277V	0-10V	38	4200	110.5	3500 4100 5000	>80	50,000

AVAILABLE ACCESSORIES (ordered separately)

YHANGER6PK – Y Fit Cable Hanger 6 Pack
DRVEXTCABLE – 3 FT Driver Extension Cable

DTSK2 – 2X2 Direct Troffer Surface Mount Kit (White)
DTSK4 – 2X4 Direct Troffer Surface Mount Kit (White)

DTFLK2 – 2X2 Recess Mount Flange Kit
DTFLK4 – 2X4 Recess Mount Flange Kit

50,000 HOUR LED DESIGNER SERIES FIXED WATTAGE VOLUMETRIC LUMINAIRES

2x2 DESIGNER SERIES FIXED WATTAGE VOLUMETRIC LUMINAIRES DAMP LOCATION RATED, SHIPPED FULLY ASSEMBLED



Luxterior
by TCP

TRV2UZD2330K	23W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	23	2600	113	3000	>80	50,000
TRV2UZD2335K	23W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	23	2600	113	3500	>80	50,000
TRV2UZD2341K	23W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	23	2600	113	4100	>80	50,000
TRV2UZD2350K	23W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	23	2600	113	5000	>80	50,000
TRV2UZD2930K	29W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	29	3200	110.3	3000	>80	50,000
TRV2UZD2935K	29W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	29	3200	110.3	3500	>80	50,000
TRV2UZD2941K	29W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	29	3200	110.3	4100	>80	50,000
TRV2UZD2950K	29W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	29	3200	110.3	5000	>80	50,000
TRV2UZD3830K	38W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	38	4200	110.5	3000	>80	50,000
TRV2UZD3835K	38W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	38	4200	110.5	3500	>80	50,000
TRV2UZD3841K	38W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	38	4200	110.5	4100	>80	50,000
TRV2UZD3850K	38W Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	38	4200	110.5	5000	>80	50,000

EB - Emergency Back-Up

AVAILABLE ACCESSORIES (ordered separately)

YHANGER6PK – Y Fit Cable Hanger 6 Pack
DRVEXTCABLE – 3 FT Driver Extension Cable

DTSK2 – 2X2 Direct Troffer Surface Mount Kit (White)
DTSK4 – 2X4 Direct Troffer Surface Mount Kit (White)

DTFLK2 – 2X2 Recess Mount Flange Kit
DTFLK4 – 2X4 Recess Mount Flange Kit

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT (K)	CRI	Rated Life (hrs)	Options
-------------	------------------	---------	---------	----------------------	---------------------	-----	---------	-----	------------------	---------



50,000 HOUR LED DESIGNER SERIES FIXED WATTAGE VOLUMETRIC LUMINAIRES
2x4 DESIGNER SERIES FIXED WATTAGE VOLUMETRIC LUMINAIRES DAMP LOCATION RATED, SHIPPED FULLY ASSEMBLED

TRV4UZD2330K	23W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	23	2600	113	3000	>80	50,000	
TRV4UZD2335K	23W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	23	2600	113	3500	>80	50,000	
TRV4UZD2341K	23W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	23	2600	113	4100	>80	50,000	
TRV4UZD2350K	23W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	23	2600	113	5000	>80	50,000	
TRV4UZD2930K	29W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	29	3200	110.3	3000	>80	50,000	
TRV4UZD2935K	29W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	29	3200	110.3	3500	>80	50,000	
TRV4UZD2941K	29W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	29	3200	110.3	4100	>80	50,000	
TRV4UZD2950K	29W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	29	3200	110.3	5000	>80	50,000	
TRV4UZD3830K	38W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	38	4200	110.5	3000	>80	50,000	
TRV4UZD3835K	38W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	38	4200	110.5	3500	>80	50,000	
TRV4UZD3841K	38W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	38	4200	110.5	4100	>80	50,000	
TRV4UZD3850K	38W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	38	4200	110.5	5000	>80	50,000	
TRV4UZD4630K	46W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K	120-277V	0-10V	46	6000	130.4	3000	>80	50,000	
TRV4UZD4635K	46W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K	120-277V	0-10V	46	6000	130.4	3500	>80	50,000	
TRV4UZD4641K	46W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K	120-277V	0-10V	46	6000	130.4	4100	>80	50,000	
TRV4UZD4650K	46W Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K	120-277V	0-10V	46	6000	130.4	5000	>80	50,000	

EB - Emergency Back-Up

AVAILABLE ACCESSORIES (ordered separately)

YHANGER6PK – Y Fit Cable Hanger 6 Pack
DRVEXTCABLE – 3 FT Driver Extension Cable

DTSK2 – 2X2 Direct Troffer Surface Mount Kit (White)
DTSK4 – 2X4 Direct Troffer Surface Mount Kit (White)

DTFLK2 – 2X2 Recess Mount Flange Kit
DTFLK4 – 2X4 Recess Mount Flange Kit



Item Number

Item Description

Voltage

Dimming

Wattage¹

Lumens²

LPW

CCT(K)

CRI

Rated Life (hrs)

Options

50,000 HOUR LED LINEAR HIGH BAY LUMINAIRES

HB By TCP LED LINEAR HIGH BAY



Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Options
HB9000140	LED Linear High Bay, 120-277V, 90W, 40K	120-277V	0-10V	90	11,700	130	4000	82	50,000	
HB9000150	LED Linear High Bay, 120-277V, 90W, 50K	120-277V	0-10V	90	11,700	130	5000	82	50,000	
HB9000240	LED Linear High Bay, 347-480V, 90W, 40K	347-480V	0-10V	90	11,700	130	4000	82	50,000	
HB9000250	LED Linear High Bay, 347-480V, 90W, 50K	347-480V	0-10V	90	11,700	130	5000	82	50,000	
HB10500140	LED Linear High Bay, 120-277V, 105W, 40K	120-277V	0-10V	105	13,650	130	4000	82	50,000	
HB10500150	LED Linear High Bay, 120-277V, 105W, 50K	120-277V	0-10V	105	13,650	130	5000	82	50,000	LS1 - Factory Installed Motion Sensor (120, 277, 347v)
HB10500240	LED Linear High Bay, 347-480V, 105W, 40K	347-480V	0-10V	105	13,650	130	4000	82	50,000	LS1D - Factory Installed Motion Sensor w/ Daylight Harvesting (120, 277, 347v)
HB10500250	LED Linear High Bay, 347-480V, 105W, 50K	347-480V	0-10V	105	13,650	130	5000	82	50,000	LS4 - Factory Installed Motion Sensor(480v)
HB15000140	LED Linear High Bay, 120-277V, 150W, 40K	120-277V	0-10V	150	19,500	130	4000	82	50,000	HB1WG - Wire Guard for HB90W, HB105W and HB150W
HB15000150	LED Linear High Bay, 120-277V, 150W, 50K	120-277V	0-10V	150	19,500	130	5000	82	50,000	HB2WG - Wire Guard for HB175W and HB210W
HB15000240	LED Linear High Bay, 347-480V, 150W, 40K	347-480V	0-10V	150	19,500	130	4000	82	50,000	OT00040 - Replacement Lens Panel for HB90W, HB105W and HB150W
HB15000250	LED Linear High Bay, 347-480V, 150W, 50K	347-480V	0-10V	150	19,500	130	5000	82	50,000	OT00040A - Replacement Lens Panel for HB175W and HB210W
HB17500140	LED Linear High Bay, 120-277V, 175W, 40K	120-277V	0-10V	175	22,750	130	4000	82	50,000	MS1 - Factory installed microwave motion sensor(120-277v)
HB17500150	LED Linear High Bay, 120-277V, 175W, 50K	120-277V	0-10V	175	22,750	130	5000	82	50,000	
HB17500240	LED Linear High Bay, 347-480V, 175W, 40K	347-480V	0-10V	175	22,750	130	4000	82	50,000	
HB17500250	LED Linear High Bay, 347-480V, 175W, 50K	347-480V	0-10V	175	22,750	130	5000	82	50,000	
HB21000140	LED Linear High Bay, 120-277V, 210W, 40K	120-277V	0-10V	210	27,300	130	4000	82	50,000	
HB21000150	LED Linear High Bay, 120-277V, 210W, 50K	120-277V	0-10V	210	27,300	130	5000	82	50,000	
HB21000240	LED Linear High Bay, 347-480V, 210W, 40K	347-480V	0-10V	210	27,300	130	4000	82	50,000	
HB21000250	LED Linear High Bay, 347-480V, 210W, 50K	347-480V	0-10V	210	27,300	130	5000	82	50,000	



¹ Actual wattage may vary by +/- 10%.

² Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Options
-------------	------------------	---------	---------	----------------------	---------------------	-----	--------	-----	------------------	---------

50,000 HOUR LED IB SERIES HIGH BAY LUMINAIRES

IB SERIES LED 3 FOOT LINEAR HIGH BAY

IB3UZDA440K	LED 3 Foot Linear High Bay, 120-277V, 310W, 40K	120-277V	0-10V	310	40,300	130	4000	82	50,000	LS1 - Factory Installed Motion Sensor LS1D - Factory Installed Motion Sensor w/ Daylight Harvesting 10C - 10' Cord, No Plug
IB3UZDA450K	LED 3 Foot Linear High Bay, 120-277V, 310W, 50K	120-277V	0-10V	310	40,300	130	5000	82	50,000	10C - 10' Cord, No Plug



IB SERIES LED 4 FOOT LINEAR HIGH BAY

IB4UZDA540K	LED 4 Foot Linear High Bay, 120-277V, 410W, 40K	120-277V	0-10V	410	53,000	129.2	4000	82	50,000	LS1 - Factory Installed Motion Sensor LS1D - Factory Installed Motion Sensor w/ Daylight Harvesting 10C - 10' Cord, No Plug
IB4UZDA550K	LED 4 Foot Linear High Bay, 120-277V, 410W, 50K	120-277V	0-10V	410	53,000	129.2	5000	82	50,000	10C - 10' Cord, No Plug



Item Number	Item Description	Voltage	Dimming	Input Line Frequency	Max Power	Output Voltage	Operating Temp	Humidity	Radio Protocol	Communication Range	Options
-------------	------------------	---------	---------	----------------------	-----------	----------------	----------------	----------	----------------	---------------------	---------



SMARTSTUFF SMARTBOX LED BLUETOOTH® LUMINAIRE ACCESSORIES

SMBOXBT	The TCP SmartBox is a Bluetooth Signal Mesh based lighting control device. Once connected to a luminaire, the Bluetooth Signal Mesh and SmartBox can be configured through the TCP SmartStuff App on any Android and iOS-based devices. Through the SmartStuff App, a luminaire can be directly controlled by the SmartBox or programmed to function automatically through a variety of control schemes. Suitable for both dry and damp locations.	120-277V @15mA	0-10V	50/60Hz	1W	0-10 VDC	-23°F to 113°F	<80% RH	Bluetooth®	150ft/46m	
SMBOXFBT	The SmartBox Fixture Sensor is a Bluetooth® Signal Mesh based lighting control device. Once connected to a luminaire, the SmartBox + Fixture Sensor provides Motion and Bi-Level Controls. The Fixture Sensor incorporates a microwave sensor that detects motion through nonmetallic objects and a light sensor to measure the ambient light in the area. The SmartBox + Fixture Sensor is compatible with any luminaire with 0-10V dim to off drivers/ballast and can be configured through the TCP SmartStuff App on any Android™ or Apple® Smart devices. Suitable for both dry and damp locations.	120-277V @30mA	0-10V	50/60Hz	2W	0-10 VDC	-23°F to 113°F	<80% RH	Bluetooth®	150ft/46m	SmartStuff Remote
SMBOXPLBT	The SmartBox + Panel Sensor is a lighting control device. Once connected to a luminaire, the SmartBox + Panel Sensor can use either a microwave or a PIR sensor to detect motion and a light sensor to measure the ambient light in the area. This allows the SmartBox + Panel Sensor to control any luminaire with 0-10V dim to off drivers/ballast. Suitable for both dry and damp locations.	120-277V @15mA	0-10V	50/60Hz	1W	0-10 VDC	-23°F to 113°F	<80% RH	Bluetooth®	150ft/46m	





Item Number Item Description Voltage Dimming Wattage¹ Lumens² LPW CCT(K) CRI Rated Life (hrs) Options

50,000 HOUR LED UFO HIGH BAY LUMINAIRES

LED UFO 11" High Bay LUMINAIRES



UFOUZDB140K	LED UFO High Bay, 120-277V, 100W, 40K	120-277V	0-10V	100	14,000	140	4000	>80	50,000
UFOUZDB150K	LED UFO High Bay, 120-277V, 100W, 50K	120-277V	0-10V	100	14,000	140	5000	>80	50,000
UFOUZDB240K	LED UFO High Bay, 120-277V, 150W, 40K	120-277V	0-10V	150	21,000	140	4000	>80	50,000
UFOUZDB250K	LED UFO High Bay, 120-277V, 150W, 50K	120-277V	0-10V	150	21,000	140	5000	>80	50,000
UFOUZDB340K	LED UFO High Bay, 120-277V, 200W, 40K	120-277V	0-10V	200	29,000	145	4000	>80	50,000
UFOUZDB350K	LED UFO High Bay, 120-277V, 200W, 50K	120-277V	0-10V	200	29,000	145	5000	>80	50,000

LED UFO 14.25" High Bay LUMINAIRES



UFOUZDB440K	LED UFO High Bay, 120-277V, 240W, 40K	120-277V	0-10V	240	34,800	145	4000	>80	50,000
UFOUZDB450K	LED UFO High Bay, 120-277V, 240W, 50K	120-277V	0-10V	240	34,800	145	5000	>80	50,000
UFOUZDB540K	LED UFO High Bay, 120-277V, 300W, 40K	120-277V	0-10V	300	43,500	145	4000	>80	50,000
UFOUZDB550K	LED UFO High Bay, 120-277V, 300W, 50K	120-277V	0-10V	300	43,500	145	5000	>80	50,000

50,000 HOUR LED ROUND HIGH BAY LUMINAIRES

LED ROUND High Bay GEN 3, WET LOCATION RATED, IP65



Industra
by TCP



RHBUZDA140K	Round High Bay, 120-277V, 13,200L, 80W, 0-10V Dimming, 40K	120-277V	0-10V	80	13,200	165	4000	80	50,000
RHBUZDA150K	Round High Bay, 120-277V, 13,200L, 80W, 0-10V Dimming, 50K	120-277V	0-10V	80	13,200	165	5000	80	50,000
RHBUZDA240K	Round High Bay, 120-277V, 16,500L, 100W, 0-10V Dimming, 40K	120-277V	0-10V	100	16,500	165	4000	80	50,000
RHBUZDA250K	Round High Bay, 120-277V, 16,500L, 100W, 0-10V Dimming, 50K	120-277V	0-10V	100	16,500	165	5000	80	50,000
RHBUZDA340K	Round High Bay, 120-277V, 24,750L, 150W, 0-10V Dimming, 40K	120-277V	0-10V	150	24,750	165	4000	80	50,000
RHBUZDA350K	Round High Bay, 120-277V, 24,750L, 150W, 0-10V Dimming, 50K	120-277V	0-10V	150	24,750	165	5000	80	50,000
RHBUZDA440K	Round High Bay, 120-277V, 33,000L, 200W, 0-10V Dimming, 40K	120-277V	0-10V	200	33,000	165	4000	80	50,000
RHBUZDA450K	Round High Bay, 120-277V, 33,000L, 200W, 0-10V Dimming, 50K	120-277V	0-10V	200	33,000	165	5000	80	50,000

AVAILABLE ACCESSORIES (ordered separately)

- RHBPMA34** – ¾" Pendant mount adapter
- RHBPMB34** – ¾" Pendant mount adapter w/junction
- RHBSENSOR1** – Wet location rated daylight harvesting occupancy sensor 120/277V

- RHSREM1** – Optional infrared remote controller for programming
- RHBSENSOR1**
- RHBBRKT** – Adjustable yoke bracket
- HBRRALUM90** – 90 degree aluminum reflector
- HBRACREFL** – Acrylic refractor
- HBRACLENS** – Acrylic lens for HBRACREFL

50,000 HOUR LED HBM SERIES MODULAR HIGH BAY



Industra
by TCP

HBMUZDA450K90D	LED High Temp Modular High Bay, 120-277V, 30,000L, 200W, 0-10V Dimming, 50K	120-277V	0-10V	200	30,000	150	5000	80	50,000
----------------	---	----------	-------	-----	--------	-----	------	----	--------

AVAILABLE ACCESSORIES (ordered separately)

- HBMPTBAG** – Parts bag for modular assembly
- EXPHYHANGKIT10FT** – 100lb rated cable Y-hook hanging kit (1 kit needed per fixture)

Other reflector options available by special order. Contact manufacturer for more information.

10



5 YEAR WARRANTY

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Power Factor
-------------	------------------	---------	---------	----------------------	---------------------	-----	--------	-----	------------------	--------------

50,000 HOUR LED VAPOR TIGHT (CONSULT SPEC SHEET FOR ORDERING MATRIX)

LED 2 FOOT VAPOR TIGHT, cULUS WET LOCATION RATED, FROSTED LENS

VTF2UZDA140K	2 Foot, 24W, LED Vapor Tight, 40K	120-277V	0-10V	24	3100	130	4000	80+	50,000	≥0.9
VTF2UZDA150K	2 Foot, 24W, LED Vapor Tight, 50K	120-277V	0-10V	24	3100	130	5000	80+	50,000	≥0.9



LED 4 FOOT VAPOR TIGHT, cULUS WET LOCATION RATED, FROSTED LENS

VTF4UZDA140K	4 Foot, 20W, LED Vapor Tight, 40K	120-277V	0-10V	20	2600	130	4000	80+	50,000	≥0.9
VTF4UZDA150K	4 Foot, 20W, LED Vapor Tight, 50K	120-277V	0-10V	20	2600	130	5000	80+	50,000	≥0.9
VTF4UZDA240K	4 Foot, 40W, LED Vapor Tight, 40K	120-277V	0-10V	40	5400	135	4000	80+	50,000	≥0.9
VTF4UZDA250K	4 Foot, 40W, LED Vapor Tight, 50K	120-277V	0-10V	40	5400	135	5000	80+	50,000	≥0.9



LED 8 FOOT VAPOR TIGHT, cULUS WET LOCATION RATED, FROSTED LENS

VTF8UZDA140K	8 Foot, 65W, LED Vapor Tight, 40K	120-277V	0-10V	65	8775	135	4000	80+	50,000	≥0.9
VTF8UZDA150K	8 Foot, 65W, LED Vapor Tight, 50K	120-277V	0-10V	65	8775	135	5000	80+	50,000	≥0.9



50,000 HOUR LED WRAP LIGHT (CONSULT SPEC SHEET FOR ORDERING MATRIX)

LED WRAP LIGHT, DAMP LOCATION RATED

LWR2300135	4 Foot, 24W, 0-10V Dimming, LED Wrap Light, 35K	120-277V	0-10V	24	3500	145.8	3500	80+	50,000	≥0.9
LWR2300140	4 Foot, 24W, 0-10V Dimming, LED Wrap Light, 40K	120-277V	0-10V	24	3500	145.8	4000	80+	50,000	≥0.9
LWR2300150	4 Foot, 24W, 0-10V Dimming, LED Wrap Light, 50K	120-277V	0-10V	24	3500	145.8	5000	80+	50,000	≥0.9
LWR3500135	4 Foot, 35W, 0-10V Dimming, LED Wrap Light, 35K	120-277V	0-10V	35	5100	145.7	3500	80+	50,000	≥0.9
LWR3500140	4 Foot, 35W, 0-10V Dimming, LED Wrap Light, 40K	120-277V	0-10V	35	5200	148.6	4000	80+	50,000	≥0.9
LWR3500150	4 Foot, 35W, 0-10V Dimming, LED Wrap Light, 50K	120-277V	0-10V	35	5250	150	5000	80+	50,000	≥0.9
LWR6300135	4 Foot, 63W, 0-10V Dimming, LED Wrap Light, 35K	120-277V	0-10V	63	7700	122.2	3500	80+	50,000	≥0.9
LWR6300140	4 Foot, 63W, 0-10V Dimming, LED Wrap Light, 40K	120-277V	0-10V	63	7900	125.4	4000	80+	50,000	≥0.9
LWR6300150	4 Foot, 63W, 0-10V Dimming, LED Wrap Light, 50K	120-277V	0-10V	63	8050	127.8	5000	80+	50,000	≥0.9



Many items are DLC QPL.
Visit www.designlights.org/qpl for a full listing.

¹ Actual wattage may vary by +/- 10%.

² Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.



5 YEAR WARRANTY

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Power Factor
-------------	------------------	---------	---------	----------------------	---------------------	-----	--------	-----	------------------	--------------

50,000 HOUR LED GENERAL PURPOSE STRIP/ LOW BAY LUMINAIRES (CONSULT SPEC SHEET FOR ORDERING MATRIX)

LED GENERAL PURPOSE STRIPS, DAMP LOCATION RATED



TCPGGS2UZDA835K	2 Foot, 20W, 0-10V Dimming, General Purpose Strip, 35K	120-277V	0-10V	20	2600	130	3500	80	50,000	≥0.9
TCPGGS2UZDA840K	2 Foot, 20W, 0-10V Dimming, General Purpose Strip, 40K	120-277V	0-10V	20	2600	130	4000	80	50,000	≥0.9
TCPGGS2UZDA850K	2 Foot, 20W, 0-10V Dimming, General Purpose Strip, 50K	120-277V	0-10V	20	2600	130	5000	80	50,000	≥0.9
TCPGGS4UZDA835K	4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 35K	120-277V	0-10V	32	4200	130	3500	80	50,000	≥0.9
TCPGGS4UZDA840K	4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 40K	120-277V	0-10V	32	4200	130	4000	80	50,000	≥0.9
TCPGGS4UZDA850K	4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 50K	120-277V	0-10V	32	4200	130	5000	80	50,000	≥0.9
TCPGGS4UZDB835K	4 Foot, 18W, 0-10V Dimming, General Purpose Strip, 35K	120-277V	0-10V	18	2300	130	3500	80	50,000	≥0.9
TCPGGS4UZDB840K	4 Foot, 18W, 0-10V Dimming, General Purpose Strip, 40K	120-277V	0-10V	18	2300	130	4000	80	50,000	≥0.9
TCPGGS4UZDB850K	4 Foot, 18W, 0-10V Dimming, General Purpose Strip, 50K	120-277V	0-10V	18	2300	130	5000	80	50,000	≥0.9
TCPGGS4UZDE835K	4 Foot, 75W, 0-10V Dimming, General Purpose Strip, 35K	120-277V	0-10V	75	9750	130	3500	80	50,000	≥0.9
TCPGGS4UZDE840K	4 Foot, 75W, 0-10V Dimming, General Purpose Strip, 40K	120-277V	0-10V	75	9750	130	4000	80	50,000	≥0.9
TCPGGS4UZDE850K	4 Foot, 75W, 0-10V Dimming, General Purpose Strip, 50K	120-277V	0-10V	75	9750	130	5000	80	50,000	≥0.9
TCPGGS8UZDA835K	8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 35K	120-277V	0-10V	65	8500	130	3500	80	50,000	≥0.9
TCPGGS8UZDA840K	8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 40K	120-277V	0-10V	65	8500	130	4000	80	50,000	≥0.9
TCPGGS8UZDA850K	8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 50K	120-277V	0-10V	65	8500	130	5000	80	50,000	≥0.9
TCPGGS8UZDB835K	8 Foot, 38W, 0-10V Dimming, General Purpose Strip, 35K	120-277V	0-10V	38	4900	130	3500	80	50,000	≥0.9
TCPGGS8UZDB840K	8 Foot, 38W, 0-10V Dimming, General Purpose Strip, 40K	120-277V	0-10V	38	4900	130	4000	80	50,000	≥0.9
TCPGGS8UZDB850K	8 Foot, 38W, 0-10V Dimming, General Purpose Strip, 50K	120-277V	0-10V	38	4900	130	5000	80	50,000	≥0.9
TCPGGS8UZDE835K	8 Foot, 75W, 0-10V Dimming, General Purpose Strip, 35K	120-277V	0-10V	75	9750	130	3500	80	50,000	≥0.9
TCPGGS8UZDE840K	8 Foot, 75W, 0-10V Dimming, General Purpose Strip, 40K	120-277V	0-10V	75	9750	130	4000	80	50,000	≥0.9
TCPGGS8UZDE850K	8 Foot, 75W, 0-10V Dimming, General Purpose Strip, 50K	120-277V	0-10V	75	9750	130	5000	80	50,000	≥0.9

OPTIONS

- LS1** – PIR Motion Sensor
- LS1D** – PIR/Daylight Sensor
- EB** – Emergency Back-Up(not available on 2FT option)

50,000 HOUR LED GENERAL PURPOSE STRIP RETROFIT KIT (CONSULT SPEC SHEET FOR ORDERING MATRIX)

LED GENERAL PURPOSE STRIP RETROFIT KITS, DAMP LOCATION RATED



TCPGPR4UZDA835K	4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 35K	120-277V	0-10V	32	4200	130	3500	80	50,000	≥0.9
TCPGPR4UZDA840K	4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 40K	120-277V	0-10V	32	4200	130	4000	80	50,000	≥0.9
TCPGPR4UZDA850K	4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 50K	120-277V	0-10V	32	4200	130	5000	80	50,000	≥0.9
TCPGPR8UZDA835K	8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 35K	120-277V	0-10V	65	8500	130	3500	80	50,000	≥0.9
TCPGPR8UZDA840K	8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 40K	120-277V	0-10V	65	8500	130	4000	80	50,000	≥0.9
TCPGPR8UZDA850K	8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 50K	120-277V	0-10V	65	8500	130	5000	80	50,000	≥0.9
TCPGPR4UZDB840K	4 Foot, 18W, 0-10V Dimming, GP Strip Retrofit Kit, 40K	120-277V	0-10V	18	2300	130	4000	80	50,000	≥0.9
TCPGPR4UZDB850K	4 Foot, 18W, 0-10V Dimming, GP Strip Retrofit Kit, 50K	120-277V	0-10V	18	2300	130	5000	80	50,000	≥0.9
TCPGPR8UZDB840K	8 Foot, 38W, 0-10V Dimming, GP Strip Retrofit Kit, 40K	120-277V	0-10V	38	4900	130	4000	80	50,000	≥0.9

¹ Actual wattage may vary by +/- 10%.

² Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

Item Number	Item Description	Wattage/Lumens			Wattage/LPW			CCT(K)	CRI	Rated Life (hrs)
		LW	MW	HW	LW	MW	HW			

50,000 HOUR LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHTS

7/9/12W 4" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (65W REPLACEMENT)

DLC4SWUZDCCT	Round Commercial Downlight, 120-277V, 7/9/12W, 0-10V Dimming	7W 675/695/690	9W 870/900/895	12W 1150/1200/1190	7W 96.4/99.3/98.6	9W 96.7/100/99.4	12W 95.8/100/99	3000K 3500K 4100K	80	50,000	
DLC4SWUZDCCT2	Round Commercial Downlight, 120-277V, 7/9/12W, 0-10V Dimming	7W 700/750	9W 900/1000	12W 1200/1300	7W 100/107.1	9W 100/111.1	12W 100/108.3	2700K 5000K	80	50,000	
DLC4SWUZDLCCT	Round Commercial Downlight, Lens Version, 120-277V, 7/9/12W, 0-10V Dimming	7W 743/765/759	9W 957/990/985	12W 1265/1320/1309	7W 106.1/109.2/ 108.4	9W 106.3/110/ 109.4	12W 105.4/110/ 109.1	3000K 3500K 4100K	80	50,000	
DLC4SWUZDLCCT2	Round Commercial Downlight, Lens Version, 120-277V, 7/9/12W, 0-10V Dimming	7W 700/750	9W 990/950	12W 1250/1300	7W 100/107.1	9W 100/105.6	12W 104.2/108.3	2700K 5000K	80	50,000	

8/10/15W 6" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (85W REPLACEMENT)

DLC6SWUZDCCT	Round Commercial Downlight, 120-277V, 8/10/15W, 0-10V Dimming	8W 820/850/865	10W 1030/1080/ 1095	15W 1430/1530/ 1515	8W 103/106/108	10W 103/108/110	15W 95/102/101	3000K 3500K 4100K	80	50,000	
DLC6SWUZDCCT2	Round Commercial Downlight, 120-277V, 8/10/15W, 0-10V Dimming	8W 700/750	10W 1000/1050	15W 1450/1500	8W 87.5/93.8	10W 100/105	15W 96.7/100	2700K 5000K	80	50,000	
DLC6SWUZDLCCT	Round Commercial Downlight, Lens Version, 120-277V, 8/10/15W, 0-10V Dimming	8W 902/935/952	10W 1133/1188/ 1205	15W 1573/1683/ 1667	8W 112.8/116.9/ 118.9	10W 113.3/118.8/ 120.5	15W 104.9/112.2 /111.1	3000K 3500K 4100K	80	50,000	
DLC6SWUZDLCCT2	Round Commercial Downlight, Lens Version, 120-277V, 8/10/15W, 0-10V Dimming	8W 900/950	10W 1200/1300	15W 1600/1650	8W 112.5/118.8	10W 120/130	15W 106.7/110	2700K 5000K	80	50,000	

11/15/19W 8" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (85W REPLACEMENT)

DLC8SWUZDCCT	Round Commercial Downlight, 120-277V, 11/15/19W, 0-10V Dimming	11W 1270/1300/ 1305	15W 1720/1705/ 1775	19W 2085/2150/ 2085	11W 115.5/118.2/119	15W 115/113.7/118.3	19W 110/113.2/110	3000K 3500K 4100K	80	50,000	
DLC8SWUZDCCT2	Round Commercial Downlight, 120-277V, 11/15/19W, 0-10V Dimming	11W 1200/1300	15W 1600/1650	19W 2000/2050	11W 109.1/118.2	15W 106.7/110	19W 105.3/107.9	2700K 5000K	80	50,000	
DLC8SWUZDLCCT	Round Commercial Downlight, Lens Version, 120-277V, 11/15/19W, 0-10V Dimming	11W 1397/1430/ 1436	15W 1892/1876/ 1953	19W 2294/2365/ 2294	11W 127/130/ 130.5	15W 126.1/125/ 130.2	19W 120.7/124.5/ 120.7	3000K 3500K 4100K	80	50,000	
DLC8SWUZDLCCT2	Round Commercial Downlight, Lens Version, 120-277V, 11/15/19W, 0-10V Dimming	11W 1400/1500	15W 1800/1900	19W 2300/2400	11W 127.3/136.4	15W 120/126.7	19W 121/126.3	2700K 5000K	80	50,000	

18/23/30W 10" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (125W REPLACEMENT)

DLC10SWUZDCCT	Round Commercial Downlight, 120-277V, 18/23/30W, 0-10V Dimming	18W 2100/2150/ 2150	23W 2590/2660/ 2660	30W 3205/3330/ 3305	18W 116.7/119.4/ 119.4	23W 112.6/115.7/ 115.7	30W 106.8/111/ 110.2	3000K 3500K 4100K	80	50,000	
DLC10SWUZDCCT2	Round Commercial Downlight, 120-277V, 18/23/30W, 0-10V Dimming	18W 1800/1850	23W 2250/2300	30W 2850/2950	18W 100/102.8	23W 97.8/100	30W 95/98.3	2700K 5000K	80	50,000	
DLC10SWUZDLCCT	Round Commercial Downlight, Lens Version, 120-277V, 18/23/30W, 0-10V Dimming	18W 2310/2365/ 2365	23W 2849/2926/ 2926	30W 3526/3663/ 3636	18W 128.3/131.4/ 131.4	23W 123.9/127.2/ 127.2	30W 117.5/122.1/ 121.1	3000K 3500K 4100K	80	50,000	
DLC10SWUZDLCCT2	Round Commercial Downlight, Lens Version, 120-277V, 18/23/30W, 0-10V Dimming	18W 1950/2150	23W 2500/2650	30W 3250/3500	18W 108.3/119.4	23W 108.7/115.2	30W 108.3/116.7	2700K 5000K	80	50,000	

18/23/30W 12" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (125W REPLACEMENT)

DLC12SWUZDCCT	Round Commercial Downlight, 120-277V, 18/23/30W, 0-10V Dimming	18W 2110/2160/ 2180	23W 2650/2690/ 2690	30W 3260/3380/ 3360	18W 117.2/120/ 121.1	23W 115.2/117/ 117	30W 108.7/112.7 112	3000K 3500K 4100K	80	50,000	
DLC12SWUZDCCT2	Round Commercial Downlight, 120-277V, 18/23/30W, 0-10V Dimming	18W 1800/1850	23W 2250/2300	30W 2850/2950	18W 100/102.8	23W 97.8/100	30W 95/98.3	2700K 5000K	80	50,000	
DLC12SWUZDLCCT	Round Commercial Downlight, Lens Version, 120-277V, 18/23/30W, 0-10V Dimming	18W 2321/2376/ 2398	23W 2915/2959/ 2959	30W 3586/3718/ 3696	18W 128.9/132/ 133.2	23W 126.7/128.7/ 128.7	30W 119.5/123.9/ 123.2	3000K 3500K 4100K	80	50,000	
DLC12SWUZDLCCT2	Round Commercial Downlight, Lens Version, 120-277V, 18/23/30W, 0-10V Dimming	18W 1950/2150	23W 2500/2700	30W 3250/3500	18W 108.3/119.4	23W 108.7/117.4	30W 108.3/116.7	2700K 5000K	80	50,000	

Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing

¹ Actual wattage may vary by +/- 10%.

² Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.



5 YEAR WARRANTY

Item Number

Item Description

CCT/Wattage/
Lumens
LW MW HW

CCT/Wattage/
LPW
LW MW HW

CCT(K)
CRI

Rated Life (hrs)

50,000 HOUR LED FLAT SELECTABLE RECESSED DOWNLIGHTS

5/6" LED FLAT SELECTABLE RECESSED DOWNLIGHT



LEDWSDR56CCT1	5/6" Flat Selectable Recessed Downlight, 120-277V, 8/10.5/14.5W, 24/27/30K, Triac Dimming	8W 24K/27K/30K 850	10.5W 24K/27K/30K 1100	14.5W 24K/27K/30K 1400	8W 24K/27K/30K 90	11W 24K/27K/30K 90	11W 24K/27K/30K 90	2400K 2700K 3000K	80	50,000
---------------	---	--------------------------	------------------------------	------------------------------	-------------------------	--------------------------	--------------------------	-------------------------	----	--------

LEDWSDR56CCT2	5/6" Flat Selectable Recessed Downlight, 120-277V, 8/10.5/14.5W, 30/40/50K, Triac Dimming	8W 30K/40K/50K 850	10.5W 30K/40K/50K 1100	14.5W 30K/40K/50K 1400	8W 30K/40K/50K 90	11W 30K/40K/50K 90	11W 30K/40K/50K 90	3000K 4000K 5000K	80	50,000
---------------	---	--------------------------	------------------------------	------------------------------	-------------------------	--------------------------	--------------------------	-------------------------	----	--------

35,000 HOUR LED BEVELED DESIGNER LOOK RECESSED DOWNLIGHTS

4" and 5/6" LED BEVELED SELECTABLE RECESSED DOWNLIGHT



L75DR4DCCT1	4" Beveled Color Selectable Recessed Downlight, 120-277V, 10W, 0-10V Dimming	10W 2400K 765	10W 2700K 850	10W 3000K 850	-	-	-	2400K 2700K 3000K	80	50,000
-------------	--	---------------------	---------------------	---------------------	---	---	---	-------------------------	----	--------

L75DR4DCCT2	4" Beveled Color Selectable Recessed Downlight, 120-277V, 11W, 0-10V Dimming	11W 3000K 900	11W 4000K 960	11W 5000K 915	-	-	-	3000K 4000K 5000K	80	50,000
-------------	--	---------------------	---------------------	---------------------	---	---	---	-------------------------	----	--------



L120DR56DCCT1	5/6" Beveled Color/Wattage Selectable, Recessed Downlight, 120-277V, 8/10.5/14.5W, 0-10V Dimming	8W 24K/27K/30K 765/850/850	10.5W 24K/27K/30K 1000/1100/1100	14.5W 24K/27K/30K 1260/1400/1400	8W 24K/27K/30K 95.6/106.3/106.3	10.5W 24K/27K/30K 95.2/104.8/104.8	14.5W 24K/27K/30K 86.9/96.6/96.6	2400K 2700K 3000K	80	50,000
---------------	--	----------------------------------	--	--	---------------------------------------	--	--	-------------------------	----	--------

L120DR56DCCT2	5/6" Beveled Color/Wattage Selectable, Recessed Downlight, 120-277V, 8/10.5/14.5W, 0-10V Dimming	8W 30K/40K/50K 910/945/920	10.5W 30K/40K/50K 1100/1160/1120	14.5W 30K/40K/50K 1450/1370/1490	8W 30K/40K/50K 113.8/118.1/115	10.5W 30K/40K/50K 104.8/110.5/106.7	14.5W 30K/40K/50K 100/94.5/102.8	3000K 4000K 5000K	80	50,000
---------------	--	----------------------------------	--	--	--------------------------------------	---	--	-------------------------	----	--------

Item Number Item Description Voltage Lamp Watts Wattage Equivalent Lumens Lumens Per Watt CCT Beam Angle CRI Case Quantity

50,000 HOUR RECESSED LED COLOR SELECTABLE SNAP-IN DOWNLIGHTS

4" LED COLOR SELECTABLE SNAP-IN DOWNLIGHT



DR4CCT1	4" Snap-In DownLight CCT1	120v-277v	13	75W	850	65	2400K 2700K 3000K	120	80	6
---------	---------------------------	-----------	----	-----	-----	----	-------------------------	-----	----	---

DR4CCT2	4" Snap-In DownLight CCT2	120v-277v	13	75W	850	65	3000K 3500K 4100K	120	80	6
---------	---------------------------	-----------	----	-----	-----	----	-------------------------	-----	----	---

6" LED COLOR SELECTABLE SNAP-IN DOWNLIGHT



DR6CCT1	6" Snap-In DownLight CCT1	120v-277v	14	85W	1100	78	2400K 2700K 3000K	120	80	6
---------	---------------------------	-----------	----	-----	------	----	-------------------------	-----	----	---

DR6CCT2	6" Snap-In DownLight CCT2	120v-277v	14	85W	1100	78	3000K 3500K 4100K	120	80	6
---------	---------------------------	-----------	----	-----	------	----	-------------------------	-----	----	---

40,000 HOUR LED COLOR SELECTABLE EDGE-LIT SNAP-IN DOWNLIGHTS

4" LED COLOR SELECTABLE EDGE-LIT SNAP-IN DOWNLIGHT



L9EL4DCCT1	4" Edge-Lit Snap-In DownLight CCT1	120v-277v	11	40W	765/850/850	69.5/77.3/ 77.3	2400K 2700K 3000K	120	80	6
------------	------------------------------------	-----------	----	-----	-------------	--------------------	-------------------------	-----	----	---

L9EL4DCCT2	4" Edge-Lit Snap-In DownLight CCT2	120v-277v	11	40W	835/882/868	75.9/80.2/ 78.9	3000K 4000K 5000K	120	80	6
------------	------------------------------------	-----------	----	-----	-------------	--------------------	-------------------------	-----	----	---

6" LED COLOR SELECTABLE EDGE-LIT SNAP-IN DOWNLIGHT



L12EL6DCCT1	6" Edge-Lit Snap-In DownLight CCT1	120v-277v	14	60W	900/1000/ 1000	64.3/71.2/ 71.2	2400K 2700K 3000K	120	80	6
-------------	------------------------------------	-----------	----	-----	-------------------	--------------------	-------------------------	-----	----	---

L12EL6DCCT2	6" Edge-Lit Snap-In DownLight CCT2	120v-277v	14	60W	1060/1150/ 1130	75.9/80.2/ 78.9	3000K 4000K 5000K	120	80	6
-------------	------------------------------------	-----------	----	-----	--------------------	--------------------	-------------------------	-----	----	---

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	Beam Angle	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	-----	------------	-----	---------------

35,000 HOUR LED HI CRI RECESSED DOWNLIGHTS

9W 4" LED HI CRI RECESSED DOWNLIGHTS (50W REPLACEMENT)

L9DR4D3527K95	LED 9W 4" Hi CRI Recessed Downlight - 2700K	120	9	50W	550	61.1	2700K	120	90	6
L9DR4D3530K95	LED 9W 4" Hi CRI Recessed Downlight - 3000K	120	9	50W	600	66.7	3000K	120	90	6



12W 5/6" LED HI CRI RECESSED DOWNLIGHTS (65W REPLACEMENT)

L11DR56D3527K95	LED 11W 5/6" Hi CRI Recessed Downlight - 2700K	120	11	65W	700	63.6	2700K	120	90	6
L11DR56D3530K95	LED 11W 5/6" Hi CRI Recessed Downlight - 3000K	120	11	65W	750	68.2	3000K	120	90	6



50,000 HOUR LED DIMMABLE JUNCTION BOX DOWNLIGHTS

11W 5/6" LED DIMMABLE JUNCTION BOX DOWNLIGHTS (75W REPLACEMENT)

SDL61D27K	LED 11W 5/6" Junction Box Disc Downlight - 2700K	120	11	75W	1100	100	2700K	120	80	6
SDL61D30K	LED 11W 5/6" Junction Box Disc Downlight - 3000K	120	11	75W	1100	100	3000K	120	80	6
SDL61D41K	LED 11W 5/6" Junction Box Disc Downlight - 4100K	120	11	75W	1100	100	4100K	120	80	6
SDL61D50K	LED 11W 5/6" Junction Box Disc Downlight - 5000K	120	11	75W	1100	100	5000K	120	80	6



40,000 HOUR LED DELUX SERIES ROUND SNAP-IN DOWNLIGHTS

14W 6" LED DELUX SERIES ROUND SNAP-IN DOWNLIGHTS (85W REPLACEMENT)

DDC61D27K	LED 14W 6" Round Snap-In Downlight - 2700K	120	14	85W	1100	78	2700K	110	80	6
DDC61D30K	LED 14W 6" Round Snap-In Downlight - 3000K	120	14	85W	1100	78	3000K	110	80	6
DDC61D35K	LED 14W 6" Round Snap-In Downlight - 3500K	120	14	85W	1100	78	3500K	110	80	6
DDC61D41K	LED 14W 6" Round Snap-In Downlight - 4100K	120	14	85W	1100	78	4100K	110	80	6
DDC61D50K	LED 14W 6" Round Snap-In Downlight - 5000K	120	14	85W	1100	78	5000K	110	80	6



6" LED DELUX SERIES ROUND SNAP-IN DOWNLIGHT TRIM RINGS

TR6BLK	Black 6" Trim Ring									20
TR6WHT	White 6" Trim Ring									20
TR6AGD	Antique Gold 6" Trim Ring									20
TR6SLV	Silver 6" Trim Ring									20
TR6RGD	Rose Gold 6" Trim Ring									20



Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	Beam Angle	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	-----	------------	-----	---------------

35,000 HOUR RECESSED LED DOWNLIGHTS

10W 4" RECESSED DOWNLIGHTS (75W REPLACEMENT)



LED10DR430K	LED 10W 4" Recessed Downlight - 3000K	120	10	75W	750	75	3000K	120	80	6
-------------	---------------------------------------	-----	----	-----	-----	----	-------	-----	----	---

12W 5/6" RECESSED DOWNLIGHTS (120W REPLACEMENT)



LED14DR5630K	LED 12W 5 5/8" Recessed Downlight - 3000K	120	12	120W	1300	108.3	3000K	120	80	6
--------------	---	-----	----	------	------	-------	-------	-----	----	---

40,000 HOUR LED SQUARE SNAP-IN DOWNLIGHTS

13W 4" LED SQUARE SNAP-IN DOWNLIGHTS (60W REPLACEMENT)



DDR40227	LED 13W 4" Square Snap-In Downlight - 2700K	120	13	75W	750	57.7	2700K	110	80	6
DDR40230	LED 13W 4" Square Snap-In Downlight - 3000K	120	13	75W	750	57.7	3000K	110	80	6
DDR40240	LED 13W 4" Square Snap-In Downlight - 4000K	120	13	75W	750	57.7	4000K	110	80	6
DDR40250	LED 13W 4" Square Snap-In Downlight - 5000K	120	13	75W	750	57.7	5000K	110	80	6

14W 6" LED SQUARE SNAP-IN DOWNLIGHTS (75W REPLACEMENT)



DDR60227	LED 14W 6" Square Snap-In Downlight - 2700K	120	14	85W	1000	71.4	2700K	110	80	6
DDR60230	LED 14W 6" Square Snap-In Downlight - 3000K	120	14	85W	1000	71.4	3000K	110	80	6
DDR60240	LED 14W 6" Square Snap-In Downlight - 4000K	120	14	85W	1000	71.4	4000K	110	80	6
DDR60250	LED 14W 6" Square Snap-In Downlight - 5000K	120	14	85W	1000	71.4	5000K	110	80	6


18W 8" LED SQUARE SNAP-IN DOWNLIGHTS (100W REPLACEMENT)



DDR80227	LED 18W 8" Square Snap-In Downlight - 2700K	120	18	125W	1400	77.8	2700K	110	80	6
DDR80230	LED 18W 8" Square Snap-In Downlight - 3000K	120	18	125W	1400	77.8	3000K	110	80	6
DDR80240	LED 18W 8" Square Snap-In Downlight - 4000K	120	18	125W	1400	77.8	4000K	110	80	6
DDR80250	LED 18W 8" Square Snap-In Downlight - 5000K	120	18	125W	1400	77.8	5000K	110	80	6


Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	Beam Angle	CRI	Case Quantity
40,000 HOUR LED ROUND SNAP-IN DOWNLIGHTS										
13W 4" LED ROUND SNAP-IN DOWNLIGHTS (60W REPLACEMENT)										

DDR40127	LED 13W 4" Round Snap-In Downlight - 2700K	120	13	75W	850	65.4	2700K	110	80	6
DDR40130	LED 13W 4" Round Snap-In Downlight - 3000K	120	13	75W	850	65.4	3000K	110	80	6
DDR40140	LED 13W 4" Round Snap-In Downlight - 4000K	120	13	75W	850	65.4	4000K	110	80	6
DDR40150	LED 13W 4" Round Snap-In Downlight - 5000K	120	13	75W	850	65.4	5000K	110	80	6




14W 6" LED ROUND SNAP-IN DOWNLIGHTS (75W REPLACEMENT)										
--	--	--	--	--	--	--	--	--	--	--

DDR60127	LED 14W 6" Round Snap-In Downlight - 2700K	120	14	85W	1100	78.6	2700K	110	80	6
DDR60130	LED 14W 6" Round Snap-In Downlight - 3000K	120	14	85W	1100	78.6	3000K	110	80	6
DDR60140	LED 14W 6" Round Snap-In Downlight - 4000K	120	14	85W	1100	78.6	4000K	110	80	6
DDR60150	LED 14W 6" Round Snap-In Downlight - 5000K	120	14	85W	1100	78.6	5000K	110	80	6



18W 8" LED ROUND SNAP-IN DOWNLIGHTS (100W REPLACEMENT)										
---	--	--	--	--	--	--	--	--	--	--

DDR80127	LED 18W 8" Round Snap-In Downlight - 2700K	120	18	125W	1550	86.1	2700K	110	80	6
DDR80130	LED 18W 8" Round Snap-In Downlight - 3000K	120	18	125W	1550	86.1	3000K	110	80	6
DDR80140	LED 18W 8" Round Snap-In Downlight - 4000K	120	18	125W	1550	86.1	4000K	110	80	6
DDR80150	LED 18W 8" Round Snap-In Downlight - 5000K	120	18	125W	1550	86.1	5000K	110	80	6



25,000 HOUR ALLUSION LED 10W 5/6" RECESSED DOWNLIGHTS WITH SMOOTH WARM DIMMING										
---	--	--	--	--	--	--	--	--	--	--

LED10DR56DA	10W 5"/6" Recessed Downlight	120	11	65W	1100	100	3000K to 2000K	120	80	6
-------------	------------------------------	-----	----	-----	------	-----	----------------	-----	----	---



OUTDOOR LED LUMINAIRES

Outdoor LED Luminaires include TCP's numerous types of wall packs, area, canopy and flood lighting, barn lights and security lighting.

All are wet location rated and perfect for a variety of different applications ranging from site lighting, security lighting, pathways, parking lots, perimeters and facades.



OUTDOOR LED LUMINAIRES



Item Number	Item Description	CCT/Wattage/ Lumens			LPW	CCT(K)	CRI	Rated Life (hrs)
		LW	MW	HW				

ELEMENTS LED SELECT SERIES WALL PACK

LED SELECT SERIES WALL PACK WET LOCATION RATED

TWPUZDB1CCT	LED Wall Pack, 120-277V, 0-10 Dimming, 35/45/55W, 2950K/4000K/5000K	35W 29K/40K/50K 4725	45W 29K/40K/50K 6075	55W 29K/40K/50K 7425	135	2950K 4000K 5000K	80	50,000
TWPUZDB2CCT	LED Wall Pack, 120-277V, 0-10 Dimming, 115W, 2950K/4000K/5000K	-	115W 29K/40K/50K 15525	-	135	2950K 4000K 5000K	80	50,000



Elements
by TCP

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Controls	Finish
-------------	------------------	---------	---------	----------------------	---------------------	-----	--------	-----	------------------	----------	--------

ELEMENTS LED WALL PACK

LED NON-CUTOFF WALL PACKS, ACRYLIC LENS WET LOCATION RATED

WP5500140	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K	120-277V	--	55	6900	125.5	4000K	80	50,000	-	Bronze
WP5500150	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K	120-277V	--	55	6900	125.5	5000K	80	50,000	-	Bronze
WP5500140PC	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K, Photocell	120-277V	--	55	6900	125.5	4000K	80	50,000	Photocell	Bronze
WP5500150PC	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K, Photocell	120-277V	--	55	6900	125.5	5000K	80	50,000	Photocell	Bronze
WP5500140MS	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K, Motion Sensor	120-277V	--	55	6900	125.5	4000K	80	50,000	Motion Sensor	Bronze
WP5500150MS	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K, Motion Sensor	120-277V	--	55	6900	125.5	5000K	80	50,000	Motion Sensor	Bronze
WP12000140	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K	120-277V	--	120	14500	120.8	4000K	80	50,000	-	Bronze
WP12000150	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K	120-277V	--	120	14500	120.8	5000K	80	50,000	-	Bronze
WP12000140PC	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K, Photocell	120-277V	--	120	14500	120.8	4000K	80	50,000	Photocell	Bronze
WP12000150PC	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K, Photocell	120-277V	--	120	14500	120.8	5000K	80	50,000	Photocell	Bronze
WP12000140MS	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K, Microwave Motion Sensor	120-277V	--	120	14500	120.8	4000K	80	50,000	Motion Sensor	Bronze
WP12000150MS	Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K, Microwave Motion Sensor	120-277V	--	120	14500	120.8	5000K	80	50,000	Motion Sensor	Bronze



Elements
by TCP

ELEMENTS LED ADJUSTABLE WALL PACK

LED ADJUSTABLE WALL PACK WET LOCATION RATED

FCWUZDA1T340KBRPC	Wall Pack, 120-277V, 0-10V Dimmable, Photocell, 4000K	120-277V	0-10V	40	4500	112.5	4000K	70	50,000	Photocell	Bronze
FCWUZDA1T350KBRPC	Wall Pack, 120-277V, 0-10V Dimmable, Photocell, 5000K	120-277V	0-10V	40	4500	112.5	5000K	70	50,000	Photocell	Bronze
FCWUZDA2T340KBRPC	Wall Pack, 120-277V, 0-10V Dimmable, Photocell, 4000K	120-277V	0-10V	90	9500	105	4000K	70	50,000	Photocell	Bronze
FCWUZDA2T350KBRPC	Wall Pack, 120-277V, 0-10V Dimmable, Photocell, 5000K	120-277V	0-10V	90	9500	105	5000K	70	50,000	Photocell	Bronze




Elements
by TCP

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Controls	Finish
-------------	------------------	---------	---------	----------------------	---------------------	-----	--------	-----	------------------	----------	--------

ELEMENTS LED CANOPY LIGHTS

NEW LED CANOPY LIGHT WET LOCATION RATED



Elements
by TCP

CP4500140	Small Canopy, Square, Universal, Non-Dimmable, Photocell	120-277V	-	45	5350	118.9	4000K	>80	50,000	-	Bronze
CP4500150	Small Canopy, Square, Universal, Non-Dimmable, Photocell	120-277V	-	45	5350	118.9	5000K	>80	50,000	-	Bronze
CP7000140	Small Canopy, Square, Universal, Non-Dimmable, Photocell	120-277V	-	70	7600	108.6	4000K	>80	50,000	-	Bronze
CP7000150	Small Canopy, Square, Universal, Non-Dimmable, Photocell	120-277V	-	70	7600	108.6	5000K	>80	50,000	-	Bronze

ELEMENTS LED FLOOD LIGHTS (CONSULT SPEC SHEET FOR ORDERING MATRIX)

LED FLOOD LIGHTS - SMALL WET LOCATION RATED



Elements
by TCP

FLKUA1W40KBR	Flood Light, Small, 120-277V, Non-Dimmable, Knuckle, Wide Beam, 4000K	120-277V	-	15	1650	110	4000K	80	50,000	-	Bronze
FLKUA1W50KBR	Flood Light, Small, 120-277V, Non-Dimmable, Knuckle, Wide Beam, 5000K	120-277V	-	15	1650	110	5000K	80	50,000	-	Bronze
FLYUA1W40KBR	Flood Light, Small, 120-277V, Non-Dimmable, Yoke, Wide Beam, 4000K	120-277V	-	15	1650	110	4000K	80	50,000	-	Bronze
FLYUA1W50KBR	Flood Light, Small, 120-277V, Non-Dimmable, Yoke, Wide Beam, 5000K	120-277V	-	15	1650	110	5000K	80	50,000	-	Bronze
FLKUA2W40KBR	Flood Light, Small, 120-277V, Non-Dimmable, Knuckle, Wide Beam, 4000K	120-277V	-	25	2750	110	4000K	80	50,000	-	Bronze
FLKUA2W50KBR	Flood Light, Small, 120-277V, Non-Dimmable, Knuckle, Wide Beam, 5000K	120-277V	-	25	2750	110	5000K	80	50,000	-	Bronze
FLYUA2W40KBR	Flood Light, Small, 120-277V, Non-Dimmable, Yoke, Wide Beam, 4000K	120-277V	-	25	2750	110	4000K	80	50,000	-	Bronze
FLYUA2W50KBR	Flood Light, Small, 120-277V, Non-Dimmable, Yoke, Wide Beam, 5000K	120-277V	-	25	2750	110	5000K	80	50,000	-	Bronze
FLKUA3W40KBR	Flood Light, Small, 120-277V, Non-Dimmable, Knuckle, Wide Beam, 4000K	120-277V	-	50	6250	125	4000K	80	50,000	-	Bronze
FLKUA3W50KBR	Flood Light, Small, 120-277V, Non-Dimmable, Knuckle, Wide Beam, 5000K	120-277V	-	50	6250	125	5000K	80	50,000	-	Bronze
FLYUA3W40KBR	Flood Light, Small, 120-277V, Non-Dimmable, Yoke, Wide Beam, 4000K	120-277V	-	50	6250	125	4000K	80	50,000	-	Bronze
FLYUA3W50KBR	Flood Light, Small, 120-277V, Non-Dimmable, Yoke, Wide Beam, 5000K	120-277V	-	50	6250	125	5000K	80	50,000	-	Bronze

Item Number	Item Description	Voltage	Dimming	Wattage ¹	Lumens ²	LPW	CCT(K)	CRI	Rated Life (hrs)	Controls	Finish
ELEMENTS LED POST TOP											
LED POST TOP WET LOCATION RATED											
PTUZDA1T540KN7BR	LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 4000K	120-277V	0-10V	75	9000	117	4000K	70	50,000	NEMA 7-Pin Photocell	Bronze
PTUZDA1T550KN7BR	LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 5000K	120-277V	0-10V	75	9000	117	5000K	70	50,000	NEMA 7-Pin Photocell	Bronze
PTUZDA2T540KN7BR	LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 4000K	120-277V	0-10V	100	12500	125	4000K	70	50,000	NEMA 7-Pin Photocell	Bronze
PTUZDA2T550KN7BR	LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 5000K	120-277V	0-10V	100	12500	125	5000K	70	50,000	NEMA 7-Pin Photocell	Bronze
PTUZDA3T540KN7BR	LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 4000K	120-277V	0-10V	150	18750	125	4000K	70	50,000	NEMA 7-Pin Photocell	Bronze
PTUZDA3T550KN7BR	LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 5000K	120-277V	0-10V	150	18750	125	5000K	70	50,000	NEMA 7-Pin Photocell	Bronze



Elements
by TCP

ELEMENTS LED BARN LIGHT LUMINAIRE											
LED BARN LIGHT cULus WET LOCATION RATED											
SLUA140KN3BRZ	LED Barn Light, Non Dim, 120-277V, 3-Pin PC Rec., 4000K	120-277V	-	45	6400	142	4000	70	50,000	NEMA 3-Pin Photocell	Bronze
SLUA150KN3BRZ	LED Barn Light, Non Dim, 120-277V, 3-Pin PC Rec., 5000K	120-277V	-	45	6500	144	5000	70	50,000	NEMA 3-Pin Photocell	Bronze
SLUA240KN3BRZ	LED Barn Light, Non Dim, 120-277V, 3-Pin PC Rec., 4000K	120-277V	-	70	9500	136	4000	70	50,000	NEMA 3-Pin Photocell	Bronze
SLUA250KN3BRZ	LED Barn Light, Non Dim, 120-277V, 3-Pin PC Rec., 5000K	120-277V	-	70	9700	139	5000	70	50,000	NEMA 3-Pin Photocell	Bronze



Elements
by TCP

ELEMENTS LED SECURITY LIGHT LUMINAIRE											
LED SECURITY LIGHT cULus WET LOCATION RATED											
RSLUA140KPCSV	LED Security Light, Non Dim, 120-277V, Button PC, 4000K	120-277V	-	27	3800	141	4000	70	50,000	-	Silver
RSLUA150KPCSV	LED Security Light, Non Dim, 120-277V, Button PC, 5000K	120-277V	-	27	3900	144	5000	70	50,000	-	Silver
RSLUA240KPCSV	LED Security Light, Non Dim, 120-277V, Button PC, 4000K	120-277V	-	40	5500	138	4000	70	50,000	-	Silver
RSLUA250KPCSV	LED Security Light, Non Dim, 120-277V, Button PC, 5000K	120-277V	-	40	5700	143	5000	70	50,000	-	Silver



Elements
by TCP



Item Number

Item Description

Voltage

Dimming

Wattage

Lumens^{1,2}

LPW

Distribution³

Throw

CCT(K)

CRI

Rated Life (hrs)

Finish

ELEMENTS LED AREA LIGHT LUMINAIRE GEN 2

LED AREA LIGHT LUMINAIRE cULus WET LOCATION RATED



Elements
by TCP

TALUZDA2T3F40KBR	LED Area Light, 0-10V Dimming, 120-277V, 14000L, Forward Throw, 40K	120-277V	0-10V	100	14000	140	III	Forward	4000	70+	50,000	Bronze
TALHZDA2T3F40KBR	LED Area Light, 0-10V Dimming, 347/480V, 14000L, Forward Throw, 40K	347/480V	0-10V	100	14000	140	III	Forward	4000	70+	50,000	Bronze
TALUZDA2T3F50KBR	LED Area Light, 0-10V Dimming, 120-277V, 14000L, Forward Throw, 50K	120-277V	0-10V	100	14000	140	III	Forward	5000	70+	50,000	Bronze
TALHZDA2T3F50KBR	LED Area Light, 0-10V Dimming, 347/480V, 14000L, Forward Throw, 50K	347/480V	0-10V	100	14000	140	III	Forward	5000	70+	50,000	Bronze
TALUZDA2T3L40KBR	LED Area Light, 0-10V Dimming, 120-277V, 14000L, Left Throw, 40K	120-277V	0-10V	100	14000	140	III	Left	4000	70+	50,000	Bronze
TALHZDA2T3L40KBR	LED Area Light, 0-10V Dimming, 347/480V, 14000L, Left Throw, 40K	347/480V	0-10V	100	14000	140	III	Left	4000	70+	50,000	Bronze
TALUZDA2T3L50KBR	LED Area Light, 0-10V Dimming, 120-277V, 14000L, Left Throw, 50K	120-277V	0-10V	100	14000	140	III	Left	5000	70+	50,000	Bronze
TALHZDA2T3L50KBR	LED Area Light, 0-10V Dimming, 347/480V, 14000L, Left Throw, 50K	347/480V	0-10V	100	14000	140	III	Left	5000	70+	50,000	Bronze
TALUZDA2T3B40KBR	LED Area Light, 0-10V Dimming, 120-277V, 14000L, Back Throw, 40K	120-277V	0-10V	100	14000	140	III	Back	4000	70+	50,000	Bronze
TALHZDA2T3B40KBR	LED Area Light, 0-10V Dimming, 347/480V, 14000L, Back Throw, 40K	347/480V	0-10V	100	14000	140	III	Back	4000	70+	50,000	Bronze
TALUZDA2T3B50KBR	LED Area Light, 0-10V Dimming, 120-277V, 14000L, Back Throw, 50K	120-277V	0-10V	100	14000	140	III	Back	5000	70+	50,000	Bronze
TALHZDA2T3B50KBR	LED Area Light, 0-10V Dimming, 347/480V, 14000L, Back Throw, 50K	347/480V	0-10V	100	14000	140	III	Back	5000	70+	50,000	Bronze
TALUZDA2T3R50KBR	LED Area Light, 0-10V Dimming, 120-277V, 14000L, Right Throw, 50K	120-277V	0-10V	100	14000	140	III	Right	5000	70+	50,000	Bronze
TALHZDA2T3R50KBR	LED Area Light, 0-10V Dimming, 347/480V, 14000L, Right Throw, 50K	347/480V	0-10V	100	14000	140	III	Right	5000	70+	50,000	Bronze
TALUZDA2T3R50KBR	LED Area Light, 0-10V Dimming, 120-277V, 14000L, Right Throw, 50K	120-277V	0-10V	100	14000	140	III	Right	5000	70+	50,000	Bronze
TALHZDA2T3R50KBR	LED Area Light, 0-10V Dimming, 347/480V, 14000L, Right Throw, 50K	347/480V	0-10V	100	14000	140	III	Right	5000	70+	50,000	Bronze
TALUZDA3T3F40KBR	LED Area Light, 0-10V Dimming, 120-277V, 20500L, Forward Throw, 40K	120-277V	0-10V	145	20500	141.4	III	Forward	4000	70+	50,000	Bronze
TALHZDA3T3F40KBR	LED Area Light, 0-10V Dimming, 347/480V, 20500L, Forward Throw, 40K	347/480V	0-10V	145	20500	141.4	III	Forward	4000	70+	50,000	Bronze
TALUZDA3T3F50KBR	LED Area Light, 0-10V Dimming, 120-277V, 20500L, Forward Throw, 50K	120-277V	0-10V	145	20500	141.4	III	Forward	5000	70+	50,000	Bronze
TALHZDA3T3F50KBR	LED Area Light, 0-10V Dimming, 347/480V, 20500L, Forward Throw, 50K	347/480V	0-10V	145	20500	141.4	III	Forward	5000	70+	50,000	Bronze
TALUZDA3T3L40KBR	LED Area Light, 0-10V Dimming, 120-277V, 20500L, Left Throw, 40K	120-277V	0-10V	145	20500	141.4	III	Left	4000	70+	50,000	Bronze
TALHZDA3T3L40KBR	LED Area Light, 0-10V Dimming, 347/480V, 20500L, Left Throw, 40K	347/480V	0-10V	145	20500	141.4	III	Left	4000	70+	50,000	Bronze
TALUZDA3T3L50KBR	LED Area Light, 0-10V Dimming, 120-277V, 20500L, Left Throw, 50K	120-277V	0-10V	145	20500	141.4	III	Left	5000	70+	50,000	Bronze
TALHZDA3T3L50KBR	LED Area Light, 0-10V Dimming, 347/480V, 20500L, Left Throw, 50K	347/480V	0-10V	145	20500	141.4	III	Left	5000	70+	50,000	Bronze
TALUZDA3T3B40KBR	LED Area Light, 0-10V Dimming, 120-277V, 20500L, Back Throw, 40K	120-277V	0-10V	145	20500	141.4	III	Back	4000	70+	50,000	Bronze
TALHZDA3T3B40KBR	LED Area Light, 0-10V Dimming, 347/480V, 20500L, Back Throw, 40K	347/480V	0-10V	145	20500	141.4	III	Back	4000	70+	50,000	Bronze
TALUZDA3T3B50KBR	LED Area Light, 0-10V Dimming, 120-277V, 20500L, Back Throw, 50K	120-277V	0-10V	145	20500	141.4	III	Back	5000	70+	50,000	Bronze
TALHZDA3T3B50KBR	LED Area Light, 0-10V Dimming, 347/480V, 20500L, Back Throw, 50K	347/480V	0-10V	145	20500	141.4	III	Back	5000	70+	50,000	Bronze
TALUZDA3T3R40KBR	LED Area Light, 0-10V Dimming, 120-277V, 20500L, Right Throw, 40K	120-277V	0-10V	145	20500	141.4	III	Right	4000	70+	50,000	Bronze
TALHZDA3T3R40KBR	LED Area Light, 0-10V Dimming, 347/480V, 20500L, Right Throw, 40K	347/480V	0-10V	145	20500	141.4	III	Right	4000	70+	50,000	Bronze
TALUZDA3T3R50KBR	LED Area Light, 0-10V Dimming, 120-277V, 20500L, Right Throw, 50K	120-277V	0-10V	300	40000	133.3	III	Right	5000	70	50,000	Bronze
TALHZDA3T3R50KBR	LED Area Light, 0-10V Dimming, 347/480V, 20500L, Right Throw, 50K	347/480V	0-10V	300	40000	133.3	III	Right	5000	70	50,000	Bronze



FACTORY INSTALLED OPTIONS (add to catalog number) **ACCESSORIES** (Field installed)

- Motion Sensor
- MS - PIR Motion Sensor with Daylight Harvesting and Bi-Level Dimming.
- N7 - NEMA 7-Pin Photocell Receptacle
- N3 - NEMA 3-Pin Photocell Receptacle

- TALPIRREMOTE - Remote Control to program the Motion Sensor (Only one needed per job)
- TALSHIELD1 - A2, A3 Backlight Shield
- TALSHIELD2 - A4, A5 Backlight Shield

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.
² Actual lumen output and input wattage may differ by +/-10%
³ Type III Standard. Types IV and V are made to order and require additional lead time. Consult factory for details.

For the most up-to-date specs and warranty information, please visit www.tcpi.com

Item Number	Item Description	Voltage	Dimming	Wattage	Lumens ^{1,2}	LPW	Distribution ³	Throw	CCT (K)	CRI	Rated Life (hrs)	Finish
-------------	------------------	---------	---------	---------	-----------------------	-----	---------------------------	-------	---------	-----	------------------	--------

ELEMENTS LED AREA LIGHT LUMINAIRE GEN 2

LED AREA LIGHT LUMINAIRE cULus WET LOCATION RATED

TALUZDA4T3F40KBR	LED Area Light, 0-10V Dimming, 120-277V, 30200L, Forward Throw, 40K	120-277V	0-10V	200	30200	151	III	Forward	4000	70+	50,000	Bronze
TALHZDA4T3F40KBR	LED Area Light, 0-10V Dimming, 347/480V, 30200L, Forward Throw, 40K	347/480V	0-10V	200	30200	151	III	Forward	4000	70+	50,000	Bronze
TALUZDA4T3F50KBR	LED Area Light, 0-10V Dimming, 120-277V, 30200L, Forward Throw, 50K	120-277V	0-10V	200	30200	151	III	Forward	5000	70+	50,000	Bronze
TALHZDA4T3F50KBR	LED Area Light, 0-10V Dimming, 347/480V, 30200L, Forward Throw, 50K	347/480V	0-10V	200	30200	151	III	Forward	5000	70+	50,000	Bronze
TALUZDA4T3L40KBR	LED Area Light, 0-10V Dimming, 120-277V, 30200L, Left Throw, 40K	120-277V	0-10V	200	30200	151	III	Left	4000	70+	50,000	Bronze
TALHZDA4T3L40KBR	LED Area Light, 0-10V Dimming, 347/480V, 30200L, Left Throw, 40K	347/480V	0-10V	200	30200	151	III	Left	4000	70+	50,000	Bronze
TALUZDA4T3L50KBR	LED Area Light, 0-10V Dimming, 120-277V, 30200L, Left Throw, 50K	120-277V	0-10V	200	30200	151	III	Left	5000	70+	50,000	Bronze
TALHZDA4T3L50KBR	LED Area Light, 0-10V Dimming, 347/480V, 30200L, Left Throw, 50K	347/480V	0-10V	200	30200	151	III	Left	5000	70+	50,000	Bronze
TALUZDA4T3B40KBR	LED Area Light, 0-10V Dimming, 120-277V, 30200L, Back Throw, 40K	120-277V	0-10V	200	30200	151	III	Back	4000	70+	50,000	Bronze
TALHZDA4T3B40KBR	LED Area Light, 0-10V Dimming, 347/480V, 30200L, Back Throw, 40K	347/480V	0-10V	200	30200	151	III	Back	4000	70+	50,000	Bronze
TALUZDA4T3B50KBR	LED Area Light, 0-10V Dimming, 120-277V, 30200L, Back Throw, 50K	120-277V	0-10V	200	30200	151	III	Back	5000	70+	50,000	Bronze
TALHZDA4T3B50KBR	LED Area Light, 0-10V Dimming, 347/480V, 30200L, Back Throw, 50K	347/480V	0-10V	200	30200	151	III	Back	5000	70+	50,000	Bronze
TALUZDA4T3R50KBR	LED Area Light, 0-10V Dimming, 120-277V, 30200L, Right Throw, 50K	120-277V	0-10V	200	30200	151	III	Right	5000	70+	50,000	Bronze
TALHZDA4T3R50KBR	LED Area Light, 0-10V Dimming, 347/480V, 30200L, Right Throw, 50K	347/480V	0-10V	200	30200	151	III	Right	5000	70+	50,000	Bronze
TALUZDA4T3R50KBR	LED Area Light, 0-10V Dimming, 120-277V, 30200L, Right Throw, 50K	120-277V	0-10V	200	30200	151	III	Right	5000	70+	50,000	Bronze
TALHZDA4T3R50KBR	LED Area Light, 0-10V Dimming, 347/480V, 30200L, Right Throw, 50K	347/480V	0-10V	200	30200	151	III	Right	5000	70+	50,000	Bronze
TALUZDA5T3F40KBR	LED Area Light, 0-10V Dimming, 120-277V, 42100L, Forward Throw, 40K	120-277V	0-10V	300	42100	140.3	III	Forward	4000	70+	50,000	Bronze
TALHZDA5T3F40KBR	LED Area Light, 0-10V Dimming, 347/480V, 42100L, Forward Throw, 40K	347/480V	0-10V	300	42100	140.3	III	Forward	4000	70+	50,000	Bronze
TALUZDA5T3F50KBR	LED Area Light, 0-10V Dimming, 120-277V, 42100L, Forward Throw, 50K	120-277V	0-10V	300	42100	140.3	III	Forward	5000	70+	50,000	Bronze
TALHZDA5T3F50KBR	LED Area Light, 0-10V Dimming, 347/480V, 42100L, Forward Throw, 50K	347/480V	0-10V	300	42100	140.3	III	Forward	5000	70+	50,000	Bronze
TALUZDA5T3L40KBR	LED Area Light, 0-10V Dimming, 120-277V, 42100L, Left Throw, 40K	120-277V	0-10V	300	42100	140.3	III	Left	4000	70+	50,000	Bronze
TALHZDA5T3L40KBR	LED Area Light, 0-10V Dimming, 347/480V, 42100L, Left Throw, 40K	347/480V	0-10V	300	42100	140.3	III	Left	4000	70+	50,000	Bronze
TALUZDA5T3L50KBR	LED Area Light, 0-10V Dimming, 120-277V, 42100L, Left Throw, 50K	120-277V	0-10V	300	42100	140.3	III	Left	5000	70+	50,000	Bronze
TALHZDA5T3L50KBR	LED Area Light, 0-10V Dimming, 347/480V, 42100L, Left Throw, 50K	347/480V	0-10V	300	42100	140.3	III	Left	5000	70+	50,000	Bronze
TALUZDA5T3B40KBR	LED Area Light, 0-10V Dimming, 120-277V, 42100L, Back Throw, 40K	120-277V	0-10V	300	42100	140.3	III	Back	4000	70+	50,000	Bronze
TALHZDA5T3B40KBR	LED Area Light, 0-10V Dimming, 347/480V, 42100L, Back Throw, 40K	347/480V	0-10V	300	42100	140.3	III	Back	4000	70+	50,000	Bronze
TALUZDA5T3B50KBR	LED Area Light, 0-10V Dimming, 120-277V, 42100L, Back Throw, 50K	120-277V	0-10V	300	42100	140.3	III	Back	5000	70+	50,000	Bronze
TALHZDA5T3B50KBR	LED Area Light, 0-10V Dimming, 347/480V, 42100L, Back Throw, 50K	347/480V	0-10V	300	42100	140.3	III	Back	5000	70+	50,000	Bronze
TALUZDA5T3R40KBR	LED Area Light, 0-10V Dimming, 120-277V, 42100L, Right Throw, 40K	120-277V	0-10V	300	42100	140.3	III	Right	4000	70+	50,000	Bronze
TALHZDA5T3R40KBR	LED Area Light, 0-10V Dimming, 347/480V, 42100L, Right Throw, 40K	347/480V	0-10V	300	42100	140.3	III	Right	4000	70+	50,000	Bronze
TALUZDA5T3R50KBR	LED Area Light, 0-10V Dimming, 120-277V, 42100L, Right Throw, 50K	120-277V	0-10V	300	42100	140.3	III	Right	5000	70	50,000	Bronze
TALHZDA5T3R50KBR	LED Area Light, 0-10V Dimming, 347/480V, 42100L, Right Throw, 50K	347/480V	0-10V	300	42100	140.3	III	Right	5000	70	50,000	Bronze



Elements
by TCP



5 YEAR WARRANTY

FACTORY INSTALLED OPTIONS (add to catalog number) ACCESSORIES (Field installed)

Motion Sensor

MS - PIR Motion Sensor with Daylight Harvesting and Bi-Level Dimming.

N7 - NEMA 7-Pin Photocell Receptacle

N3 - NEMA 3-Pin Photocell Receptacle

TALPIRREMOTE - Remote Control to program the Motion Sensor (Only one needed per job)

TALSHIELD1 - A2, A3 Backlight Shield

TALSHIELD2 - A4, A5 Backlight Shield

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

² Actual lumen output and input wattage may differ by +/-10%

³ Type III Standard. Types IV and V are made to order and require additional lead time. Consult factory for details.

For the most up-to-date specs and warranty information, please visit www.tcp.com



HORTICULTURE LIGHTING

Research tells us that LED lighting will continue to hold the largest revenue share in the horticulture lighting market for the foreseeable future. TCP is proud to currently offer you new LED products in this expanding area of the industry.

It's all about growth.

Item Number	Item Description	Voltage	Dimming	Wattage	PPF (umol/s)	PPE (umol/J)	Rated Life (hrs)	Spectrum	Power Factor
-------------	------------------	---------	---------	---------	--------------	--------------	------------------	----------	--------------

HORTICULTURE LED VAPOR TIGHT

HVT4UZDA3VG	4 Foot, 100W, LED Vapor Tight, 0-10V Dimming, All Purpose Growth Spectrum	120-277V	0-10V	100	191	1.92	50,000	All Purpose	>.9
HVT4UZDA3FL	4 Foot, 100W, LED Vapor Tight, 0-10V Dimming, Supplemental Growth Spectrum	120-277V	0-10V	100	289	2.71	50,000	Supplemental	>.9



FACTORY INSTALLED OPTIONS:

- SM – Smart Box
- 1P – 6FT Cord with NEMA 515 Plug

HTM SERIES MODULAR HORTICULTURE LED TOP LIGHT

HTMUZDA3S1	230W, LED Top Light, 0-10V Dimming, All Purpose Growth Spectrum	120-277V	0-10V	230	572	2.5	50,000	All Purpose	>.9
------------	---	----------	-------	-----	-----	-----	--------	-------------	-----

FACTORY INSTALLED OPTIONS:

- SM – Smart Box

FIELD INSTALLED ACCESSORIES (ordered separately)

- HTMCONNKIT2 – Modular Connection (2) Units
- HTMCONNKIT3 – Modular Connection (3) Units
- HTMCONNKIT4 – Modular Connection (4) Units
- HTMPC65W – 6FT Power Cord (no plug)
- HTMDAISY2FT – Quick Connect Daisy Chain Power Cord
- EXPHYHANGKIT10FT – 10FT Hanging Cable Accessory



HORTICULTURE LED STARLIGHT

L25SL22HD30VG	25W Horticulture LED Starlight	120V	Triac	25	60	2.44	30,000	All Purpose	>.98
---------------	--------------------------------	------	-------	----	----	------	--------	-------------	------




AVAILABLE ACCESSORIES (ordered separately)

- L25SL22HD30VGCLAMP – Clamp mounted fixture




TCP SPECTRUM TECHNOLOGY

Full Spectrum – All Purpose Growth

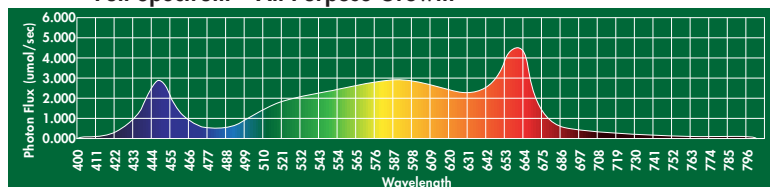

TCP's Full Spectrum Technology includes a balance of blue, green and red light to ensure your plants receive the light energy they need for both vegetative and flower growth stages.

Red Spectrum – Supplemental Growth

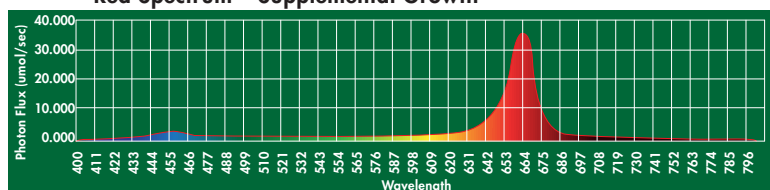

TCP's Red Focused Spectrum includes an extensive amount of red spectrum content to aggressively promote plant photosynthesis. This can be used during the flowering stage to provide a bump in light energy for your plants.



SMARTSTUFF™ CONTROLS

Technology continues to advance and change on a daily basis, and the lighting industry is no exception to that fact. TCP offers you numerous SmartStuff™ products to help you efficiently manage the lighting throughout the inside and outside of your home or business.

All our products are Bluetooth® Signal Mesh-based. TCP also has a line-up of energy-efficient LED Smart bulbs if you want to transition away from traditional lamps. Be smart about it.

You'll save energy and money in the process.

Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Case Quantity
15,000 HOUR SMARTSTUFF LED BLUETOOTH® LAMPS											
NON DIMMABLE LED 6W SMARTSTUFF A19 LAMP, E26 BASE											
SMA1927KBT	A19	Non Dim Smart LED 6w A19, 27K Bluetooth	120	6	60W	800	133.3	E26	80	2700	12
SMA19CTBT	A19	Non Dim Smart LED 6w A19, CCT Tunable Bluetooth	120	6	60W	800	133.3	E26	80	2700-5000	12
SMA19RGBWBT	A19	Non Dim Smart LED 6w A19, RGBW Bluetooth	120	6	60W	800	133.3	E26	80	2700 + RGB	12
SMA1927KSNT	A19	Non Dim Smart LED 6w A19, 27K + MW Motion Bluetooth	120	6	60W	750	125	E26	80	2700	12



Item Number	Item Description	Voltage	Dimming	Input Line Frequency	Max Power	Output Voltage	Operating Temp	Humidity	Radio Protocol	Communication Range	Options
SMBOXBT	The TCP SmartBox is a Bluetooth Signal Mesh based lighting control device. Once connected to a luminaire, the Bluetooth Signal Mesh and SmartBox can be configured through the TCP SmartStuff App on any Android and iOS-based devices. Through the SmartStuff App, a luminaire can be directly controlled by the SmartBox or programmed to function automatically through a variety of control schemes. Suitable for both dry and damp locations.	120-277V @15mA	0-10V	50/60Hz	1W	0-10 VDC	-23°F to 113°F	<80% RH	Bluetooth®	150ft/46m	
SMBOXFBT	The SmartBox Fixture Sensor is a Bluetooth® Signal Mesh based lighting control device. Once connected to a luminaire, the SmartBox + Fixture Sensor provides Motion and Bi-Level Controls. The Fixture Sensor incorporates a microwave sensor that detects motion through nonmetallic objects and a light sensor to measure the ambient light in the area. The SmartBox + Fixture Sensor is compatible with any luminaire with 0-10V dim to off drivers/ballast and can be configured through the TCP SmartStuff App on any Android™ or Apple® Smart devices. Suitable for both dry and damp locations.	120-277V @30mA	0-10V	50/60Hz	2W	0-10 VDC	-23°F to 113°F	<80% RH	Bluetooth®	150ft/46m	
SMBOXPLBT	The SmartBox + Panel Sensor is a lighting control device. Once connected to a luminaire, the SmartBox + Panel Sensor can use either a microwave or a PIR sensor to detect motion and a light sensor to measure the ambient light in the area. This allows the SmartBox + Panel Sensor to control any luminaire with 0-10V dim to off drivers/ballast. Suitable for both dry and damp locations.	120-277V @15mA	0-10V	50/60Hz	1W	0-10 VDC	-23°F to 113°F	<80% RH	Bluetooth®	150ft/46m	



Many items are DLC QPL. Visit www.designlights.org/qpl for a full listing.

¹ Actual wattage may vary by +/- 10%.
² Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

For the most up-to-date specs and warranty information, please visit www.tcp.com



LED FILAMENT LAMPS

TCP's filament products include classic filament A-lamps, LED Shape Filaments, Antique filament lamps, The Good Life line-up, classic filament decorative lamps and Classic Filament T-lamps.

All combine the latest in LED technology with the elegance of filament lighting in its various forms.

LED FILAMENT LAMPS



Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
15,000 HOUR LED HIGH CRI FILAMENT LAMPS, DIMMABLE												
DIMMABLE LED HIGH CRI 40W FILAMENT A19, CLEAR, E26 BASE												
FA19D4024E26SCL92	A19	Dim 92 CRI LED 4.5w A19, Clear-24K	120	4.5	40W	450	100	E26	92	2400	Clear	12
FA19D4027E26SCL95	A19	Dim 95 CRI LED 4.5w A19, Clear-27K	120	4.5	40W	450	100	E26	95	2700	Clear	12
FA19D4030E26SCL95	A19	Dim 95 CRI LED 4.5w A19, Clear-30K	120	4.5	40W	450	100	E26	95	3000	Clear	12
FA19D4040E26SCL95	A19	Dim 95 CRI LED 4.5w A19, Clear-40K	120	4.5	40W	450	100	E26	95	4000	Clear	12
FA19D4050E26SCL95	A19	Dim 95 CRI LED 4.5w A19, Clear-50K	120	4.5	40W	450	100	E26	95	5000	Clear	12
DIMMABLE LED HIGH CRI 60W FILAMENT A19, CLEAR, E26 BASE												
FA19D6024E26SCL92	A19	Dim 92 CRI LED 8w A19, Clear-24K	120	8	60W	800	100	E26	92	2400	Clear	12
FA19D6027E26SCL95	A19	Dim 95 CRI LED 8w A19, Clear-27K	120	8	60W	800	100	E26	95	2700	Clear	12
FA19D6030E26SCL95	A19	Dim 95 CRI LED 8w A19, Clear-30K	120	8	60W	800	100	E26	95	3000	Clear	12
FA19D6040E26SCL95	A19	Dim 95 CRI LED 8w A19, Clear-40K	120	8	60W	800	100	E26	95	4000	Clear	12
FA19D6050E26SCL95	A19	Dim 95 CRI LED 8w A19, Clear-50K	120	8	60W	800	100	E26	95	5000	Clear	12
DIMMABLE LED HIGH CRI 25W FILAMENT FB11, CLEAR, E12 BASE												
FB11D2524E12SCL92	B11	Dim LED 3w B11, 92 CRI, 24K Clear	120	3	25W	250	83.3	E12	92	2400	Clear	12
FB11D2527E12SCL95	B11	Dim LED 3w B11, 95 CRI, 27K Clear	120	3	25W	250	83.3	E12	95	2700	Clear	12
FB11D2530E12SCL95	B11	Dim LED 3w B11, 95 CRI, 30K Clear	120	3	25W	250	83.3	E12	95	3000	Clear	12
FB11D2540E12SCL95	B11	Dim LED 3w B11, 95 CRI, 40K Clear	120	3	25W	250	83.3	E12	95	4000	Clear	12
FB11D2550E12SCL95	B11	Dim LED 3w B11, 95 CRI, 50K Clear	120	3	25W	250	83.3	E12	95	5000	Clear	12
DIMMABLE LED HIGH CRI 25W FILAMENT FB11, CLEAR, E26 BASE												
FB11D2524E26SCL92	B11	Dim LED 3w B11, 92 CRI, 24K Clear	120	3	25W	250	83.3	E26	92	2400	Clear	12
FB11D2527E26SCL95	B11	Dim LED 3w B11, 95 CRI, 27K Clear	120	3	25W	250	83.3	E26	95	2700	Clear	12
FB11D2530E26SCL95	B11	Dim LED 3w B11, 95 CRI, 30K Clear	120	3	25W	250	83.3	E26	95	3000	Clear	12
FB11D2540E26SCL95	B11	Dim LED 3w B11, 95 CRI, 40K Clear	120	3	25W	250	83.3	E26	95	4000	Clear	12
FB11D2550E26SCL95	B11	Dim LED 3w B11, 95 CRI, 50K Clear	120	3	25W	250	83.3	E26	95	5000	Clear	12





Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
-------------	-----------	------------------	---------	------------	--------------------	--------	-----	------	-----	-------------------	------------	---------------

15,000 HOUR LED HIGH CRI FILAMENT LAMPS, DIMMABLE

DIMMABLE LED HIGH CRI 40W FILAMENT FB11, CLEAR, E12 BASE



FB11D4024E12SCL92	B11	Dim LED 4w B11, 92 CRI, 24K Clear	120	4	40W	300	75	E12	92	2400	Clear	12
FB11D4027E12SCL95	B11	Dim LED 4w B11, 95 CRI, 27K Clear	120	4	40W	300	75	E12	95	2700	Clear	12
FB11D4030E12SCL95	B11	Dim LED 4w B11, 95 CRI, 30K Clear	120	4	40W	300	75	E12	95	3000	Clear	12
FB11D4040E12SCL95	B11	Dim LED 4w B11, 95 CRI, 40K Clear	120	4	40W	300	75	E12	95	4000	Clear	12
FB11D4050E12SCL95	B11	Dim LED 4w B11, 95 CRI, 50K Clear	120	4	40W	300	75	E12	95	5000	Clear	12



DIMMABLE LED HIGH CRI 40W FILAMENT FB11, CLEAR, E26 BASE



FB11D4024E26SCL92	B11	Dim LED 4w B11, 92 CRI, 24K Clear	120	4	40W	300	75	E26	92	2400	Clear	12
FB11D4027E26SCL95	B11	Dim LED 4w B11, 95 CRI, 27K Clear	120	4	40W	300	75	E26	95	2700	Clear	12
FB11D4030E26SCL95	B11	Dim LED 4w B11, 95 CRI, 30K Clear	120	4	40W	300	75	E26	95	3000	Clear	12
FB11D4040E26SCL95	B11	Dim LED 4w B11, 95 CRI, 40K Clear	120	4	40W	300	75	E26	95	4000	Clear	12
FB11D4050E26SCL95	B11	Dim LED 4w B11, 95 CRI, 50K Clear	120	4	40W	300	75	E26	95	5000	Clear	12

DIMMABLE LED HIGH CRI 60W FILAMENT FB11, CLEAR, E12 BASE



FB11D6024E12SCL92	B11	Dim LED 5w B11, 92 CRI, 24K Clear	120	5	60W	500	100	E12	92	2400	Clear	12
FB11D6027E12SCL95	B11	Dim LED 5w B11, 95 CRI, 27K Clear	120	5	60W	500	100	E12	95	2700	Clear	12
FB11D6030E12SCL95	B11	Dim LED 5w B11, 95 CRI, 30K Clear	120	5	60W	500	100	E12	95	3000	Clear	12
FB11D6040E12SCL95	B11	Dim LED 5w B11, 95 CRI, 40K Clear	120	5	60W	500	100	E12	95	4000	Clear	12
FB11D6050E12SCL95	B11	Dim LED 5w B11, 95 CRI, 50K Clear	120	5	60W	500	100	E12	95	5000	Clear	12











DIMMABLE LED HIGH CRI 60W FILAMENT FB11, CLEAR, E26 BASE



FB11D6024E26SCL92	B11	Dim LED 5w B11, 92 CRI, 24K Clear	120	5	60W	500	100	E26	92	2400	Clear	12
FB11D6027E26SCL95	B11	Dim LED 5w B11, 95 CRI, 27K Clear	120	5	60W	500	100	E26	95	2700	Clear	12
FB11D6030E26SCL95	B11	Dim LED 5w B11, 95 CRI, 30K Clear	120	5	60W	500	100	E26	95	3000	Clear	12
FB11D6040E26SCL95	B11	Dim LED 5w B11, 95 CRI, 40K Clear	120	5	60W	500	100	E26	95	4000	Clear	12
FB11D6050E26SCL95	B11	Dim LED 5w B11, 95 CRI, 50K Clear	120	5	60W	500	100	E26	95	5000	Clear	12

Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
-------------	-----------	------------------	---------	------------	--------------------	--------	-----	------	-----	-------------------	------------	---------------

15,000 HOUR LED SHAPE FILAMENT LAMPS, NON DIMMABLE
NON DIMMABLE LED SHAPE FILAMENT A19, CLEAR, E26 BASE

FA19BUTTERFLYBD	A19	LED .3w A19 Butterfly Shape, Base Down, Yellow	120	0.3	-	20	66.7	E26	>80	Yellow	Clear	12	
BUTTERFLY													
FA19CATBD	A19	LED .3w A19 Cat Shape, Base Down, Yellow	120	0.3	-	20	66.7	E26	>80	Yellow	Clear	12	
CAT													
FA19DOGBD	A19	LED .3w A19 Dog Shape, Base Down, Yellow	120	0.3	-	20	66.7	E26	>80	Yellow	Clear	12	
DOG													
FA19HEARTBD	A19	LED .3w A19 Heart Shape, Base Down, 2700K	120	0.3	-	20	66.7	E26	>80	2700K	Clear	12	
HEART BASE UP													
FA19HEARTBU	A19	LED .3w A19 Heart Shape, Base Up, 2700K	120	0.3	-	20	66.7	E26	>80	2700K	Clear	12	
HEART BASE DOWN													
FA19HEARTRBD	A19	LED .3w A19 Heart Shape, Base Down, Red	120	0.3	-	5	16.7	E26	>80	Red	Clear	12	
REINDEER													
FA19REINDEERBD	A19	LED .3w A19 Reindeer Shape, Base Down, 5000K	120	0.3	-	30	100	E26	>80	5000K	Clear	12	
SNOW													
FA19SNOWBD	A19	LED .3w A19 Snowflake Shape, Base Down, 5000K	120	0.3	-	30	100	E26	>80	5000K	Clear	12	
SNOWMAN													
FA19SNOWMANBD	A19	LED .3w A19 Snowman Shape, Base Down, 5000K	120	0.3	-	30	100	E26	>80	5000K	Clear	12	
BLUE STAR													
FA19STARBD	A19	LED .3w A19 Star Shape, Base Down, Blue	120	0.3	-	3	10	E26	>80	Blue	Clear	12	

15,000 HOUR LED SHAPE FILAMENT LAMPS, NON DIMMABLE

NON DIMMABLE LED SHAPE FILAMENT A19, CLEAR, E26 BASE



RED STAR

FA19STARRBD	A19	LED .3w A19 Star Shape, Base Down, Red	120	0.3	-	4	13.3	E26	>80	Red	Clear	12
-------------	-----	--	-----	-----	---	---	------	-----	-----	-----	-------	----



STAR, 5000K

FA19STARWBD	A19	LED .3w A19 Star Shape, Base Down, 5000K	120	0.3	-	25	83.3	E26	>80	5000K	Clear	12
-------------	-----	--	-----	-----	---	----	------	-----	-----	-------	-------	----



GREEN TREE

FA19XMTRREBD	A19	LED .3w A19 Tree Shape, Base Down, Green	120	0.3	-	15	50	E26	>80	Green	Clear	12
--------------	-----	--	-----	-----	---	----	----	-----	-----	-------	-------	----



RED TREE

FA19XMTRREBD	A19	LED .3w A19 Tree Shape, Base Down, Red	120	0.3	-	2	6.7	E26	>80	Red	Clear	12
--------------	-----	--	-----	-----	---	---	-----	-----	-----	-----	-------	----

NON DIMMABLE LED SHAPE FILAMENT G40, CLEAR, E26 BASE



ARROW

FG40ARROWBD	G40	LED 1w G40 Arrow Shape, Base Down, Yellow	120	1	-	60	60	E26	>80	Yellow	Clear	12
-------------	-----	---	-----	---	---	----	----	-----	-----	--------	-------	----



CACTUS

FG40CACTUSBD	G40	LED 1w G40 Cactus Shape, Base Down, Green	120	1	-	89	89	E26	>80	Green	Clear	12
--------------	-----	---	-----	---	---	----	----	-----	-----	-------	-------	----



HOME BASE DOWN

FG40HOMEBD	G40	LED 1w G40 Home Shape, Base Down, 2700K	120	1	-	50	50	E26	>80	2700K	Clear	12
------------	-----	---	-----	---	---	----	----	-----	-----	-------	-------	----



HOME BASE UP

FG40HOMEBU	G40	LED 1w G40 Home Shape, Base Up, 2700K	120	1	-	60	60	E26	>80	2700K	Clear	12
------------	-----	---------------------------------------	-----	---	---	----	----	-----	-----	-------	-------	----



LOVE BASE DOWN

FG40LOVEBD	G40	LED 1w G40 Love Shape, Base Down, 2700K	120	1	-	60	60	E26	>80	2700K	Clear	12
------------	-----	---	-----	---	---	----	----	-----	-----	-------	-------	----



LOVE BASE UP

FG40LOVEBU	G40	LED 1w G40 Love Shape, Base Up, 2700K	120	1	-	60	60	E26	>80	2700K	Clear	12
------------	-----	---------------------------------------	-----	---	---	----	----	-----	-----	-------	-------	----

Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
15,000 HOUR LED FILAMENT A-LAMPS, DIMMABLE												
DIMMABLE LED 3.5W A15 FILAMENT, E26 BASE												
FA15D2527EC	A15	Dim LED 3.5w A15,27K Clear	120	3.5	25W	250	100	E26	80	2700	Clear	12
FA15D2527EW	A15	Dim LED 3.5w A15,27K Frosted	120	3.5	25W	250	100	E26	80	2700	Clear	12
FA15D2527H	A15	Dim LED 3.5w A15 Horizontal, 27K Clear	120	3.0	25W	200	66.7	E26	80	2700	Clear	12
FA15D2527V	A15	Dim LED 3.5w A15 Vertical, 27K Clear	120	3.0	25W	200	66.7	E26	80	2700	Clear	12
DIMMABLE LED 4.5W A19 FILAMENT, E26 BASE												
FA19D4022KC	A19	Dim LED 4.5w A19,22K Clear	120	4.5	40W	425	94	E26	80	2200	Clear	12
FA19D4027KC	A19	Dim LED 4.5w A19,27K Clear	120	4.5	40W	450	100	E26	80	2700	Clear	12
FA19D4027EW	A19	Dim LED 4.5w A19,27K Frosted	120	4.5	40W	450	100	E26	80	2700	Frosted	12
FA19D4040EC	A19	Dim LED 4.5w A19,40K Clear	120	4.5	40W	450	100	E26	80	4000	Clear	12
FA19D4040EW	A19	Dim LED 4.5w A19,40K Frosted	120	4.5	40W	450	100	E26	80	4000	Frosted	12
FA19D4050EC	A19	Dim LED 4.5w A19,50K Clear	120	4.5	40W	450	100	E26	80	5000	Clear	12
FA19D4050EW	A19	Dim LED 4.5w A19,50K Frosted	120	4.5	40W	450	100	E26	80	5000	Frosted	12
DIMMABLE LED 4.5W A19 FILAMENT, COLORED GLASS, E26 BASE												
FA19D40BC	A19	Dim LED 4.5w A19, Clear Blue	120	4.5	40W	Blue	-	E26	80	Blue	Blue	12
FA19D40YC	A19	Dim LED 4.5w A19, Clear Yellow	120	4.5	40W	Yellow	-	E26	80	Yellow	Yellow	12
DIMMABLE LED 8W A19 FILAMENT, E26 BASE												
FA19D6022KC	A19	Dim LED 8w A19,22K Clear	120	8	60W	775	97	E26	80	2200	Clear	12
FA19D6022KW	A19	Dim LED 8w A19,22K Frosted	120	8	60W	775	97	E26	80	2200	Frosted	12
FA19D6027EC	A19	Dim LED 8w A19,27K Clear	120	8	60W	800	100	E26	80	2700	Clear	12
FA19D6027EW	A19	Dim LED 8w A19,27K Frosted	120	8	60W	800	100	E26	80	2700	Frosted	12
FA19D6030EC	A19	Dim LED 8w A19,30K Clear	120	8	60W	800	100	E26	80	3000	Clear	12
FA19D6030EW	A19	Dim LED 8w A19,30K Frosted	120	8	60W	800	100	E26	80	3000	Frosted	12
FA19D6040EC	A19	Dim LED 8w A19,40K Clear	120	8	60W	800	100	E26	80	4000	Clear	12
FA19D6040EW	A19	Dim LED 8w A19,40K Frosted	120	8	60W	800	100	E26	80	4000	Frosted	12
FA19D6050EC	A19	Dim LED 8w A19,50K Clear	120	8	60W	800	100	E26	80	5000	Clear	12
FA19D6050EW	A19	Dim LED 8w A19,50K Frosted	120	8	60W	800	100	E26	80	5000	Frosted	12
DIMMABLE LED 8W A19 FILAMENT, SILVER BOWL, E26 BASE												
FA19D6027SB	A19	Dim LED 8w A19,27K Silver Bowl	120	8	60W	650	81.3	E26	80	2700	Clear	12
DIMMABLE LED 8W A19 FILAMENT, COLORED GLASS, E26 BASE												
FA19D60BC	A19	Dim LED 8w A19, Clear Blue	120	8	40W	Blue	-	E26	80	Blue	Blue	12
FA19D60YC	A19	Dim LED 8w A19, Clear Yellow	120	8	40W	Yellow	-	E26	80	Yellow	Yellow	12



FA15, Clear



FA15, Frosted



FA15, Horizontal



FA15, Vertical



FA19, Clear



FA19, Frosted



FA19, Clear Blue



FA19, Clear Yellow



FA19, Silver Bowl

Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
-------------	-----------	------------------	---------	------------	--------------------	--------	-----	------	-----	-------------------	------------	---------------

AMBERGLOW 15,000 HOUR LED 24K CLASSIC WHITE FILAMENT LAMPS, DIMMABLE

DIMMABLE LED 3W B11 FILAMENT, E12 BASE



FB11D2524E12SCL92	B11	Dim LED 3w B11, 24K Clear, 92CRI	120	3	25W	250	83.3	E12	92	2400	Clear	12
FB11D2524E12SFR92	B11	Dim LED 3w B11, 24K Frost, 92CRI	120	3	25W	250	83.3	E12	92	2400	Frost	12

DIMMABLE LED 3W B11 FILAMENT, E26 BASE



FB11D2524E26SCL92	B11	Dim LED 3w B11, 24K Clear, 92CRI	120	3	25W	250	83.3	E26	92	2400	Clear	12
FB11D2524E26SFR92	B11	Dim LED 3w B11, 24K Frost, 92CRI	120	3	25W	250	83.3	E26	92	2400	Frost	12

DIMMABLE LED 4W B11 FILAMENT, E12 BASE



FB11D4024E12SCL92	B11	Dim LED 4w B11, 24K Clear, 92CRI	120	4	40W	300	75	E12	92	2400	Clear	12
FB11D4024E12SFR92	B11	Dim LED 4w B11, 24K Frost, 92CRI	120	4	40W	300	75	E12	92	2400	Frost	12

DIMMABLE LED 4W B11 FILAMENT, E26 BASE



FB11D4024E26SCL92	B11	Dim LED 4w B11, 24K Clear, 92CRI	120	4	40W	300	75	E26	92	2400	Clear	12
FB11D4024E26SFR92	B11	Dim LED 4w B11, 24K Frost, 92CRI	120	4	40W	300	75	E26	92	2400	Frost	12

DIMMABLE LED 5W B11 FILAMENT, E12 BASE



FB11D6024E12SCL92	B11	Dim LED 5w B11, 24K Clear, 92CRI	120	5	60W	500	100	E12	92	2400	Clear	12
FB11D6024E12SFR92	B11	Dim LED 5w B11, 24K Frost, 92CRI	120	5	60W	500	100	E12	92	2400	Frost	12

DIMMABLE LED 5W B11 FILAMENT, E26 BASE



FB11D6024E26SCL92	B11	Dim LED 5w B11, 24K Clear, 92CRI	120	5	60W	500	100	E26	92	2400	Clear	12
FB11D6024E26SFR92	B11	Dim LED 5w B11, 24K Frost, 92CRI	120	5	60W	500	100	E26	92	2400	Frost	12

DIMMABLE LED 3W F11 FILAMENT, E12 BASE



FF11D2524E12SCL92	F11	Dim LED 3w F11, 24K Clear, 92CRI	120	3	25W	250	83.3	E12	92	2400	Clear	12
FF11D2524E12SFR92	F11	Dim LED 3w F11, 24K Frost, 92CRI	120	3	25W	250	83.3	E12	92	2400	Frost	12

DIMMABLE LED 3W F11 FILAMENT, E26 BASE



FF11D2524E26SCL92	F11	Dim LED 3w F11, 24K Clear, 92CRI	120	3	25W	250	83.3	E26	92	2400	Clear	12
FF11D2524E26SFR92	F11	Dim LED 3w F11, 24K Frost, 92CRI	120	3	25W	250	83.3	E26	92	2400	Frost	12

DIMMABLE LED 4W F11 FILAMENT, E12 BASE



FF11D4024E12SCL92	F11	Dim LED 4w F11, 24K Clear, 92CRI	120	4	40W	300	75	E12	92	2400	Clear	12
FF11D4024E12SFR92	F11	Dim LED 4w F11, 24K Frost, 92CRI	120	4	40W	300	75	E12	92	2400	Frost	12

DIMMABLE LED 4W F11 FILAMENT, E26 BASE



FF11D4024E26SCL92	F11	Dim LED 4w F11, 24K Clear, 92CRI	120	4	40W	300	75	E26	92	2400	Clear	12
FF11D4024E26SFR92	F11	Dim LED 4w F11, 24K Frost, 92CRI	120	4	40W	300	75	E26	92	2400	Frost	12

DIMMABLE LED 5W F11 FILAMENT, E12 BASE

FF11D6024E12SCL92	F11	Dim LED 5w F11, 24K Clear, 92CRI	120	5	60W	500	100	E12	92	2400	Clear	12
FF11D6024E12SFR92	F11	Dim LED 5w F11, 24K Frost, 92CRI	120	5	60W	500	100	E12	92	2400	Frost	12

DIMMABLE LED 5W F11 FILAMENT, E26 BASE

FF11D6024E26SCL92	F11	Dim LED 5w F11, 24K Clear, 92CRI	120	5	60W	500	100	E26	92	2400	Clear	12
FF11D6024E26SFR92	F11	Dim LED 5w F11, 24K Frost, 92CRI	120	5	60W	500	100	E26	92	2400	Frost	12

Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
DIMMABLE LED 4.5W A19 FILAMENT, E26 BASE												
FA19D4024E26SCL92	A19	Dim LED 4.5w A19,24K Clear, 92CRI	120	4.5	40W	450	100	E26	92	2400	Clear	12
FA19D4024E26SFR92	A19	Dim LED 4.5w A19,24K Frost, 92CRI	120	4.5	40W	450	100	E26	92	2400	Frost	12
DIMMABLE LED 8W A19 FILAMENT, E26 BASE												
FA19D6024E26SCL92	A19	Dim LED 8w A19,24K Clear, 92CRI	120	8	60W	800	100	E26	92	2400	Clear	12
FA19D6024E26SFR92	A19	Dim LED 8w A19,24K Frost, 92CRI	120	8	60W	800	100	E26	92	2400	Frost	12
DIMMABLE LED 5W ST19 FILAMENT, E26 BASE												
FST19D4024E26SCL92	ST19	Dim LED 5w ST19,24K Clear, 92CRI	120	5	40W	450	90	E26	92	2400	Clear	12
FST19D4024E26SFR92	ST19	Dim LED 5w ST19,24K Frost, 92CRI	120	5	40W	450	90	E26	92	2400	Frost	12
DIMMABLE LED 4.5W G40 FILAMENT, E26 BASE												
FG40D4024E26SCL92	G40	Dim LED 4.5w G40,24K Clear, 92CRI	120	4.5	40W	450	100	E26	92	2400	Clear	12
FG40D4024E26SFR92	G40	Dim LED 4.5w G40,24K Frost, 92CRI	120	4.5	40W	450	100	E26	92	2400	Frost	12
DIMMABLE LED 4W G25 FILAMENT, E26 BASE												
FG40D4024E26SCL92	G25	Dim LED 4.5w G25,24K Clear, 92CRI	120	4.5	40W	450	100	E26	92	2400	Clear	12
FG40D4024E26SFR92	G25	Dim LED 4.5w G25,24K Frost, 92CRI	120	4.5	40W	450	100	E26	92	2400	Frost	12
DIMMABLE LED 3W G16 DECO, E12 BASE												
FG16D2524E12SCL92	G16	Dim LED 3w G16, 24K Clear, 92CRI	120	3	25W	250	83.3	E12	92	2400	Clear	12
FG16D2524E12SFR92	G16	Dim LED 3w G16, 24K Frost, 92CRI	120	3	25W	250	83.3	E12	92	2400	Frost	12
DIMMABLE LED 3W G16 DECO, E26 BASE												
FG16D2524E26SCL92	G16	Dim LED 3w G16, 24K Clear, 92CRI	120	3	25W	250	83.3	E26	92	2400	Clear	12
FG16D2524E26SFR92	G16	Dim LED 3w G16, 24K Frost, 92CRI	120	3	25W	250	83.3	E26	92	2400	Frost	12
DIMMABLE LED 4W G16 DECO, E12 BASE												
FG16D4024E12SCL92	G16	Dim LED 4w G16, 24K Clear, 92CRI	120	4	40W	350	87.5	E12	92	2400	Clear	12
FG16D4024E12SFR92	G16	Dim LED 4w G16, 24K Frost, 92CRI	120	4	40W	350	87.5	E12	92	2400	Frost	12
DIMMABLE LED 4W G16 DECO, E26 BASE												
FG16D4024E26SCL92	G16	Dim LED 4w G16, 24K Clear, 92CRI	120	4	40W	350	87.5	E26	92	2400	Clear	12
FG16D4024E26SFR92	G16	Dim LED 4w G16, 24K Frost, 92CRI	120	4	40W	350	87.5	E26	92	2400	Frost	12



Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Case Quantity
-------------	-----------	------------------	---------	------------	--------------------	--------	-----	------	-----	-------------------	---------------

15,000 HOUR GOOD LIFE WARM DIMMING LED FILAMENT LAMPS

DIMMABLE LED 3.5W A15 LAMP, 27K - 18K, E26 BASE



FA15D25GL27	A15	Dim LED 3.5w FIL A15,27K-18K	120	3.5	25W	300	85.7	E26	>80	3200-1800	12
-------------	-----	------------------------------	-----	-----	-----	-----	------	-----	-----	-----------	----

DIMMABLE LED 8W A19 LAMP, 27K - 18K, E26 BASE



FA19D60GL27	A19	Dim LED 8w FIL A19,27K-18K	120	8	60W	800	100	E26	80	2700-1800	12
-------------	-----	----------------------------	-----	---	-----	-----	-----	-----	----	-----------	----

DIMMABLE LED 8W A19 LAMP, 32K - 18K, E26 BASE

FA19D60GL1	A19	Dim LED 8w FIL A19,32K-18K	120	8	60W	800	100	E26	80	3200-1800	12
------------	-----	----------------------------	-----	---	-----	-----	-----	-----	----	-----------	----

DIMMABLE LED 5W R20 LAMP, 27K - 18K, E26 BASE



FR20D50GL27	R20	Dim LED 5w FIL R20,27K-18K	120	5	50W	450	90	E26	>80	2700-1800	12
-------------	-----	----------------------------	-----	---	-----	-----	----	-----	-----	-----------	----

DIMMABLE LED 8W BR30 LAMP, 27K - 18K, E26 BASE



FBR30D65GL27	BR30	Dim LED 8w FIL BR30, 27K-18K	120	8	65W	650	81.3	E26	80	2700-1800	12
--------------	------	------------------------------	-----	---	-----	-----	------	-----	----	-----------	----

DIMMABLE LED 8W BR30 LAMP, 32K - 18K, E26 BASE

FBR30D65GL1	BR30	Dim LED 8w FIL BR30, 32K-18K	120	8	65W	650	81.3	E26	80	3200-1800	12
-------------	------	------------------------------	-----	---	-----	-----	------	-----	----	-----------	----

DIMMABLE LED 5W CANDELABRA LAMP, 27K - 18K, E12 BASE



FB11D60FRGL27	B11	Dim LED 5w FIL B11,27K-18K	120	5	60W	500	100	E12	80	2700-1800	12
---------------	-----	----------------------------	-----	---	-----	-----	-----	-----	----	-----------	----

DIMMABLE LED 5W CANDELABRA LAMP, 32K - 18K, E12 BASE

FB11D60FRGL1	B11	Dim LED 5w FIL B11,32K-18K	120	5	60W	500	100	E12	80	3200-1800	12
--------------	-----	----------------------------	-----	---	-----	-----	-----	-----	----	-----------	----



FF11D60FRGL1	F11	Dim LED 5w FIL F11,32K-18K	120	5	60W	500	100	E12	80	3200-1800	12
--------------	-----	----------------------------	-----	---	-----	-----	-----	-----	----	-----------	----

DIMMABLE LED 4W CANDELABRA LAMP, 27K - 18K, E12 BASE

FB11D40FRGL127	B11	Dim LED 4w FIL B11,27K-18K	120	4	40W	250	62.5	E12	80	2700-1800	12
----------------	-----	----------------------------	-----	---	-----	-----	------	-----	----	-----------	----

DIMMABLE LED 5W G25 LAMP, 27K - 18K, E26 BASE



FG25D60GL27	G25	Dim LED 5w FIL G25,27K-18K	120	5	40W	500	100	E26	80	2700-1800	12
-------------	-----	----------------------------	-----	---	-----	-----	-----	-----	----	-----------	----

DIMMABLE LED 3W G25 LAMP, 27K - 18K, E26 BASE

FG25D25GL27	G25	Dim LED 3w FIL G25,27K-18K	120	3	25W	250	83.3	E26	80	2700-1800	12
-------------	-----	----------------------------	-----	---	-----	-----	------	-----	----	-----------	----

DIMMABLE LED 5W G25 LAMP, 32K - 18K, E26 BASE

FG25D60GL1	G25	Dim LED 5w FIL G25,32K-18K	120	5	40W	500	100	E26	80	3200-1800	12
------------	-----	----------------------------	-----	---	-----	-----	-----	-----	----	-----------	----

DIMMABLE LED 8W G40 LAMP, 32K - 18K, E26 BASE



FG40D60GL1	G40	Dim LED 8w FIL G40,32K-18K	120	8	60W	800	100	E26	80	3200-1800	12
------------	-----	----------------------------	-----	---	-----	-----	-----	-----	----	-----------	----

DIMMABLE LED 8W ST19 LAMP, 27K - 18K, E26 BASE



FST19D60GL27	ST19	Dim LED 8w FIL ST19,27K-18K	120	8	60W	500	62.5	E26	80	2700-1800	12
--------------	------	-----------------------------	-----	---	-----	-----	------	-----	----	-----------	----

DIMMABLE LED 8W ST19 LAMP, 32K - 18K, E26 BASE

FST19D60GL1	ST19	Dim LED 8w FIL ST19,32K-18K	120	8	60W	500	62.5	E26	80	3200-1800	12
-------------	------	-----------------------------	-----	---	-----	-----	------	-----	----	-----------	----

Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
-------------	-----------	------------------	---------	------------	--------------------	--------	-----	------	-----	-------------------	------------	---------------

15,000 HOUR LED ANTIQUE LIGHT LAMPS, DIMMABLE
DIMMABLE LED 4.5W A19 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E26 BASE

FA19D4018EC	A19	Dim LED 4.5w A19, 18K, Clear, E26 Base	120	4.5	40W	325	72.2	E26	>80	1800	Clear	12
-------------	-----	--	-----	-----	-----	-----	------	-----	-----	------	-------	----



DIMMABLE LED 4W B11 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E12 BASE

FB11D4018E12C	B11	Dim LED 4w B11, 18K, Clear, E12 Base	120	4	40W	210	52.5	E12	>80	1800	Clear	12
---------------	-----	--------------------------------------	-----	---	-----	-----	------	-----	-----	------	-------	----



DIMMABLE LED 4W F11 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E12 BASE

FF11D4018E12C	F11	Dim LED 4w F11, 18K, Clear, E12 Base	120	4	40W	210	52.5	E12	>80	1800	Clear	12
---------------	-----	--------------------------------------	-----	---	-----	-----	------	-----	-----	------	-------	----



DIMMABLE LED 4W G25 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E26 BASE

FG25D4018EC	G25	Dim LED 4w G25, 18K, Clear, E26 Base	120	4	40W	210	52.5	E26	>80	1800	Clear	12
-------------	-----	--------------------------------------	-----	---	-----	-----	------	-----	-----	------	-------	----



DIMMABLE LED 4.5W ST19 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E26 BASE

FST19D4018EC	ST19	Dim LED 5w ST19, 18K, Clear, E26 Base	120	5	40W	325	65	E26	>80	1800	Clear	12
--------------	------	---------------------------------------	-----	---	-----	-----	----	-----	-----	------	-------	----



DIMMABLE LED 4.5W T10 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E26 BASE

FT1005D4018EC	T10	Dim LED 5w T10, 18K, Clear, E26 Base	120	5	40W	315	63	E26	>80	1800	Clear	12
---------------	-----	--------------------------------------	-----	---	-----	-----	----	-----	-----	------	-------	----



DIMMABLE LED 3W T6 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E12 BASE

FT0603D2518E12C	T6	Dim LED 5.5w T6, 18K, Clear, E12 Base	120	3	25W	150	50	E12	>80	1800	Clear	12
-----------------	----	---------------------------------------	-----	---	-----	-----	----	-----	-----	------	-------	----





Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
-------------	-----------	------------------	---------	------------	--------------------	--------	-----	------	-----	-------------------	------------	---------------

15,000 HOUR LED SOFT ANTIQUE SPIRAL LAMPS, DIMMABLE

DIMMABLE LED 5W A19 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



FA19D2518VC	A19	Dim LED 5w A19 Spiral, 18K, Clear, E26 Base	120	5	25W	220	45	E26	>80	1800	Clear	12
-------------	-----	---	-----	---	-----	-----	----	-----	-----	------	-------	----

DIMMABLE LED 3W B11 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



FB10D2518VC	B11	Dim LED 3w B10 Spiral, 18K, Clear, E26 Base	120	3	25W	90	30	E26	>80	1800	Clear	12
-------------	-----	---	-----	---	-----	----	----	-----	-----	------	-------	----

DIMMABLE LED 5W G30 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



FG30D2518VC	G30	Dim LED 5w G30 Spiral, 18K, Clear, E26 Base	120	5	25W	240	48	E26	>80	1800	Clear	12
-------------	-----	---	-----	---	-----	-----	----	-----	-----	------	-------	----

DIMMABLE LED 5W G40 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



FG40D2518VC	G40	Dim LED 5w G40 Spiral, 18K, Clear, E26 Base	120	5	25W	240	48	E26	>80	1800	Clear	12
-------------	-----	---	-----	---	-----	-----	----	-----	-----	------	-------	----

DIMMABLE LED 5W ST19 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



FST19D2518VC	ST19	Dim LED 5w ST19 Spiral, 18K, Clear, E26 Base	120	5	25W	240	48	E26	>80	1800	Clear	12
--------------	------	--	-----	---	-----	-----	----	-----	-----	------	-------	----

DIMMABLE LED 5W T9 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



FT09D2518VC	T9	Dim LED 5w T9 Spiral, 18K, Clear, E26 Base	120	5	25W	240	48	E26	>80	1800	Clear	12
-------------	----	--	-----	---	-----	-----	----	-----	-----	------	-------	----

Item Number	Lamp Type	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	Base	CRI	Color Temperature	Glass Type	Case Quantity
-------------	-----------	------------------	---------	------------	--------------------	--------	-----	------	-----	-------------------	------------	---------------

15,000 HOUR LED CLASSIC FILAMENT T-LAMPS, DIMMABLE

DIMMABLE LED 3W T6 FILAMENT, E12 BASE

FT0603D2522E12SB	T6	Dim LED 3wT6, 22K, Sandblast, E12 Base	120	3	25W	200	66.7	E12	>80	2200	Sandblast	12
FT0603D2524E12SB	T6	Dim LED 3wT6, 24K, Sandblast, E12 Base	120	3	25W	200	66.7	E12	>80	2400	Sandblast	12
FT0603D2527E12C	T6	Dim LED 3wT6, 27K, Clear, E12 Base	120	3	25W	250	83.3	E12	>80	2700	Clear	12
FT0603D2527E12W	T6	Dim LED 3wT6, 27K, Frost, E12 Base	120	3	25W	250	83.3	E12	>80	2700	Frosted	12



DIMMABLE LED 3.5W T10 FILAMENT, E26 BASE

FT1005D2524SB	T10	Dim LED 3.5wT10, 24K, Sandblast, E26 Base	120	3.5	25W	250	71.4	E26	>80	2400	Sandblast	12
FT1005D2527EC	T10	Dim LED 3.5wT10, 27K, Clear, E26 Base	120	3.5	25W	250	71.4	E26	>80	2700	Clear	12
FT1005D2527EW	T10	Dim LED 3.5wT10, 27K, Frost, E26 Base	120	3.5	25W	250	71.4	E26	>80	2700	Frosted	12
FT1005D2550EC	T10	Dim LED 3.5wT10, 50K, Clear, E26 Base	120	3.5	25W	250	71.4	E26	>80	5000	Clear	12
FT1005D2550EW	T10	Dim LED 3.5wT10, 50K, Frost, E26 Base	120	3.5	25W	250	71.4	E26	>80	5000	Frosted	12
FT1007D2522SB	T10	Dim LED 3.5wT10, 22K, Sandblast, E26 Base	120	3	25W	250	83.3	E26	>80	2400	Sandblast	12
FT1007D2524SB	T10	Dim LED 3.5wT10, 24K, Sandblast, E26 Base	120	3	25W	250	83.3	E26	>80	2400	Sandblast	12
FT1007D2527C	T10	Dim LED 3.5wT10, 24K, Clear, E26 Base	120	3	25W	250	83.3	E26	>80	2400	Clear	12



DIMMABLE LED 5W T10 FILAMENT, E26 BASE

FT1005D4027EC	T10	Dim LED 5wT10, 27K, Clear, E26 Base	120	5	40W	450	90	E26	>80	2700	Clear	12
FT1005D4027EW	T10	Dim LED 5wT10, 27K, Frost, E26 Base	120	5	40W	450	90	E26	>80	2700	Frosted	12
FT1005D4030EW	T10	Dim LED 5wT10, 30K, Frost, E26 Base	120	5	40W	450	90	E26	>80	3000	Frosted	12
FT1005D4040EW	T10	Dim LED 5wT10, 40K, Frost, E26 Base	120	5	40W	450	90	E26	>80	4000	Frosted	12
FT1005D4050EC	T10	Dim LED 5wT10, 50K, Clear, E26 Base	120	5	40W	450	90	E26	>80	5000	Clear	12
FT1005D4050EW	T10	Dim LED 5wT10, 50K, Frost, E26 Base	120	5	40W	450	90	E26	>80	5000	Frosted	12

DIMMABLE LED 3.5W T25 FILAMENT, E12 BASE

FT2503D2527E12C	T6	Dim LED 3.5wT25, 27K, Clear, E12 Base	120	3.5	25W	250	71.4	E12	>80	2700	Clear	12
-----------------	----	---------------------------------------	-----	-----	-----	-----	------	-----	-----	------	-------	----



DIMMABLE LED 8W T30 FILAMENT, E26 BASE

FT3014D6022SB	T30	Dim LED 8wT30, 22K, Sandblast, E26 Base	120	8	60W	800	100	E26	>80	2200	Sandblast	12
FT3014D6024SB	T30	Dim LED 8wT30, 24K, Sandblast, E26 Base	120	8	60W	800	100	E26	>80	2400	Sandblast	12
FT3014D6027SB	T30	Dim LED 8wT30, 27K, Sandblast, E26 Base	120	8	60W	800	100	E26	>80	2700	Sandblast	12
FT3014D6027EC	T30	Dim LED 8wT30, 27K, Clear, E26 Base	120	8	60W	800	100	E26	>80	2700	Clear	12





LED LAMPS

TCP's LED lamps run the gamut for every conceivable application, including residential, retail, industrial and commercial. We also have a lamp for every purpose – from A-19's to shaped filaments to deco lamps to our Starlight series. We know light.



Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
25,000 HOUR HIGH LUMEN DIMMABLE ELITE PARS 18.5W DIMMABLE HIGH LUMEN ELITE PAR38 (REPLACES 250W)											
L30P38D2527KSP	30W DIM High Lumen P38 - 2700K 15°	120	30	250W	2700	90	20745	15	2700K	80	12
L30P38D2527KNFL	30W DIM High Lumen P38 - 2700K 25°	120	30	250W	2700	90	9955	25	2700K	80	12
L30P38D2527KFL	30W DIM High Lumen P38 - 2700K 40°	120	30	250W	2700	90	6340	40	2700K	80	12
L30P38D2530KSP	30W DIM High Lumen P38 - 3000K 15°	120	30	250W	3000	100	22233	15	3000K	80	12
L30P38D2530KNFL	30W DIM High Lumen P38 - 3000K 25°	120	30	250W	3000	100	10794	25	3000K	80	12
L30P38D2530KFL	30W DIM High Lumen P38 - 3000K 40°	120	30	250W	3000	100	6414	40	3000K	80	12
L30P38D2535KSP	30W DIM High Lumen P38 - 3500K 15°	120	30	250W	3000	100	23322	15	3500K	80	12
L30P38D2535KNFL	30W DIM High Lumen P38 - 3500K 25°	120	30	250W	3000	100	10990	25	3500K	80	12
L30P38D2535KFL	30W DIM High Lumen P38 - 3500K 40°	120	30	250W	3000	100	6845	40	3500K	80	12
L30P38D2541KSP	30W DIM High Lumen P38 - 4100K 15°	120	30	250W	3000	100	21740	15	4100K	80	12
L30P38D2541KNFL	30W DIM High Lumen P38 - 4100K 25°	120	30	250W	3000	100	10665	25	4100K	80	12
L30P38D2541KFL	30W DIM High Lumen P38 - 4100K 40°	120	30	250W	3000	100	6483	40	4100K	80	12
L30P38D2550KSP	30W DIM High Lumen P38 - 5000K 15°	120	30	250W	3000	100	23126	15	5000K	80	12
L30P38D2550KNFL	30W DIM High Lumen P38 - 5000K 25°	120	30	250W	3000	100	11284	25	5000K	80	12
L30P38D2550KFL	30W DIM High Lumen P38 - 5000K 40°	120	30	250W	3000	100	6637	40	5000K	80	12





Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	------------	-----	-----	---------------

25,000 HOUR HIGH OUTPUT DIMMABLE ELITE PARS

18.5W DIMMABLE HIGH OUTPUT ELITE PAR38 (REPLACES 150W)



LED17HOP38D27KFL	18.5W DIM High Output P38 - 2700K 40°	120	18.5	150W	1800	97.3	4346	40	2700K	80	12
LED17HOP38D27KNFL	18.5W DIM High Output P38 - 2700K 25°	120	18.5	150W	1800	97.3	9299	25	2700K	80	12
LED17HOP38D27KSP	18.5W DIM High Output P38 - 2700K 15°	120	18.5	150W	1800	97.3	21535	15	2700K	80	12
LED17HOP38D27KSPB	18.5W DIM High Output P38 - 2700K 15° - Black	120	18.5	150W	1800	97.3	21535	15	2700K	80	12
LED17HOP38D30KFL	18.5W DIM High Output P38 - 3000K 40°	120	18.5	150W	1825	98.6	4365	40	3000K	80	12
LED17HOP38D30KFLB	18.5W DIM High Output P38 - 3000K 25° - Black	120	18.5	150W	1825	98.6	4365	40	3000K	80	12
LED17HOP38D30KNFL	18.5W DIM High Output P38 - 3000K 15°	120	18.5	150W	1825	98.6	12782	25	3000K	80	12
LED17HOP38D30KNFLB	18.5W DIM High Output P38 - 3000K 40° - Black	120	18.5	150W	1825	98.6	12782	25	3000K	80	12
LED17HOP38D30KSP	18.5W DIM High Output P38 - 3000K 25°	120	18.5	150W	1825	98.6	23699	15	3000K	80	12
LED17HOP38D30KSPB	18.5W DIM High Output P38 - 3000K 15° - Black	120	18.5	150W	1825	98.6	23699	15	3000K	80	12
LED17HOP38D35KFL	18.5W DIM High Output P38 - 3500K 25°	120	18.5	150W	1850	100.0	4365	40	3500K	80	12
LED17HOP38D35KFLB	18.5W DIM High Output P38 - 3500K 15° - Black	120	18.5	150W	1850	100.0	4365	40	3500K	80	12
LED17HOP38D35KWFL	18.5W DIM High Output P38 - 3500K 60°	120	18.5	150W	1850	100.0	-	60	3500K	80	12
LED17HOP38D35KSP	18.5W DIM High Output P38 - 3500K 25°	120	18.5	150W	1850	100.0	23685	25	3500K	80	12
LED17HOP38D35KNFL	18.5W DIM High Output P38 - 3500K 15°	120	18.5	150W	1850	100.0	12782	15	3500K	80	12
LED17HOP38D41KFL	18.5W DIM High Output P38 - 4100K 40°	120	18.5	150W	1900	102.7	4604	40	4100K	80	12
LED17HOP38D41KNFL	18.5W DIM High Output P38 - 4100K 25°	120	18.5	150W	1900	102.7	11614	25	4100K	80	12
LED17HOP38D41KSP	18.5W DIM High Output P38 - 4100K 15°	120	18.5	150W	1900	102.7	22458	15	4100K	80	12
LED17HOP38D50KFL	18.5W DIM High Output P38 - 5000K 40°	120	18.5	150W	2000	108.1	4446	40	5000K	80	12
LED17HOP38D50KNFL	18.5W DIM High Output P38 - 5000K 25°	120	18.5	150W	2000	108.1	12467	25	3000K	80	12
LED17HOP38D50KSP	18.5W DIM High Output P38 - 5000K 15°	120	18.5	150W	2000	108.1	21535	15	3000K	80	12

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
25,000 HOUR DIMMABLE ELITE PARS											
15W DIMMABLE ELITE PAR38 (REPLACES 120W)											
LED17P38D24KFL	15W PAR38 - 2400K 40°	120	15	120W	1050	70	2132	40	2400K	80	12
LED17P38D24KNFL	15W PAR38 - 2400K 25°	120	15	120W	1050	70	4750	25	2400K	80	12
LED17P38D24KSP	15W PAR38 - 2400K 15°	120	15	120W	1050	70	6937	15	2400K	80	12
LED17P38D27KFL	15W PAR38 - 2700K 40°	120	15	120W	1200	80	2563	40	2700K	80	12
LED17P38D27KFLB	15W PAR38 - 2700K 40° - Black	120	15	120W	1200	80	2563	40	2700K	80	12
LED17P38D27KNFL	15W PAR38 - 2700K 25°	120	15	120W	1200	80	5710	25	2700K	80	12
LED17P38D27KSP	15W PAR38 - 2700K 15°	120	15	120W	1200	80	8338	15	2700K	80	12
LED17P38D30KFL	15W PAR38 - 3000K 40°	120	15	120W	1200	80	3107	40	3000K	80	12
LED17P38D30KFLB	15W PAR38 - 3000K 40° - Black	120	15	120W	1200	80	3107	40	3000K	80	12
LED17P38D30KNFL	15W PAR38 - 3000K 25°	120	15	120W	1200	80	6130	25	3000K	80	12
LED17P38D30KNFLB	15W PAR38 - 3000K 25° - Black	120	15	120W	1200	80	6130	25	3000K	80	12
LED17P38D30KSP	15W PAR38 - 3000K 15°	120	15	120W	1200	80	8658	15	3000K	80	12
LED17P38D30KSPB	15W PAR38 - 3000K 15° - Black	120	15	120W	1200	80	8658	15	3000K	80	12
LED17P38D30KWFLB	15W PAR38 - 3000K 60° - Black	120	15	120W	1200	80	-	60	3000K	80	12
LED17P38D35KFL	15W PAR38 - 3500K 40°	120	15	120W	1200	80	3607	40	3500K	80	12
LED17P38D35KFLB	15W PAR38 - 3500K 40° - Black	120	15	120W	1200	80	3607	40	3500K	80	12
LED17P38D35KNFL	15W PAR38 - 3500K 25°	120	15	120W	1200	80	6130	25	3500K	80	12
LED17P38D35KNFLB	15W PAR38 - 3500K 25° - Black	120	15	120W	1200	80	6130	25	3500K	80	12
LED17P38D35KSP	15W PAR38 - 3500K 15°	120	15	120W	1200	80	8658	15	3500K	80	12
LED17P38D41KFL	15W PAR38 - 4100K 40°	120	15	120W	1200	80	2870	40	4100K	80	12
LED17P38D41KFLB	15W PAR38 - 4100K 40° - Black	120	15	120W	1200	80	2870	40	4100K	80	12
LED17P38D41KNFL	15W PAR38 - 4100K 25°	120	15	120W	1200	80	9288	25	4100K	80	12
LED17P38D41KNFLB	15W PAR38 - 4100K 25° - Black	120	15	120W	1200	80	9288	25	4100K	80	12
LED17P38D41KSP	15W PAR38 - 4100K 15°	120	15	120W	1200	80	18408	15	4100K	80	12
LED17P38D41KSPB	15W PAR38 - 4100K 15° - Black	120	15	120W	1200	80	18408	15	4100K	80	12
LED17P38D50KFL	15W PAR38 - 5000K 40°	120	15	120W	1200	80	2713	40	5000K	80	12
LED17P38D50KFLB	15W PAR38 - 5000K 40° - Black	120	15	120W	1200	80	2713	40	5000K	80	12
LED17P38D50KNFL	15W PAR38 - 5000K 25°	120	15	120W	1200	80	9387	25	5000K	80	12
LED17P38D50KSP	15W PAR38 - 5000K 15°	120	15	120W	1200	80	19721	15	5000K	80	12





Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	------------	-----	-----	---------------

13.5W DIMMABLE ELITE PAR38 (REPLACES 90W)



LED14P38D24KFL	13.5W PAR38 - 2400K 40°	120	13.5	90W	1000	75.0	-	40	2400K	80	12
LED14P38D24KNFL	13.5W PAR38 - 2400K 25°	120	13.5	90W	1000	75.0	-	25	2400K	80	12
LED14P38D24KSP	13.5W PAR38 - 2400K 15°	120	13.5	90W	1000	75.0	-	15	2400K	80	12
LED14P38D27KFL	13.5W PAR38 - 2700K 40°	120	13.5	90W	1050	77.8	2858	40	2700K	80	12
LED14P38D27KNFL	13.5W PAR38 - 2700K 25°	120	13.5	90W	1050	77.8	5583	25	2700K	80	12
LED14P38D27KNFLB	13.5W PAR38 - 2700K 25° - Black	120	13.5	90W	1050	77.8	5583	25	2700K	80	12
LED14P38D27KSP	13.5W PAR38 - 2700K 15°	120	13.5	90W	1050	77.8	10949	15	2700K	80	12
LED14P38D27KSPB	13.5W PAR38 - 2700K 15° - Black	120	13.5	90W	1050	77.8	10949	15	2700K	80	12
LED14P38D30KFL	13.5W PAR38 - 3000K 40°	120	13.5	90W	1050	77.8	2846	40	3000K	80	12
LED14P38D30KNFL	13.5W PAR38 - 3000K 25°	120	13.5	90W	1050	77.8	6721	25	3000K	80	12
LED14P38D30KSP	13.5W PAR38 - 3000K 15°	120	13.5	90W	1050	77.8	11845	15	3000K	80	12
LED14P38D30KWFL	13.5W PAR38 - 3000K 60°	120	13.5	90W	1050	77.8	-	60	3000K	80	12
LED14P38D35KFL	13.5W PAR38 - 3500K 40°	120	13.5	90W	1050	77.8	2846	40	3500K	80	12
LED14P38D35KFLB	13.5W PAR38 - 3500K 40° - Black	120	13.5	90W	1050	77.8	2846	40	3500K	80	12
LED14P38D35KNFL	13.5W PAR38 - 3500K 25°	120	13.5	90W	1050	77.8	6271	25	3500K	80	12
LED14P38D35KSP	13.5W PAR38 - 3500K 15°	120	13.5	90W	1050	77.8	10949	15	3500K	80	12
LED14P38D41KFL	13.5W PAR38 - 4100K 40°	120	13.5	90W	1050	77.8	2678	40	4100K	80	12
LED14P38D41KFLB	13.5W PAR38 - 4100K 40° - Black	120	13.5	90W	1050	77.8	2678	40	4100K	80	12
LED14P38D41KNFL	13.5W PAR38 - 4100K 25°	120	13.5	90W	1050	77.8	8310	25	4100K	80	12
LED14P38D41KSP	13.5W PAR38 - 4100K 15°	120	13.5	90W	1050	77.8	13535	15	4100K	80	12
LED14P38D41KSPB	13.5W PAR38 - 4100K 15° - Black	120	13.5	90W	1050	77.8	13535	15	4100K	80	12
LED14P38D50KFL	13.5W PAR38 - 5000K 40°	120	13.5	90W	1050	77.8	2647	40	5000K	80	12
LED14P38D50KFLB	13.5W PAR38 - 5000K 40° - Black	120	13.5	90W	1050	77.8	2647	40	5000K	80	12
LED14P38D50KNFL	13.5W PAR38 - 5000K 25°	120	13.5	90W	1150	82.1	7611	25	5000K	80	12
LED14P38D50KSP	13.5W PAR38 - 5000K 15°	120	13.5	90W	1150	82.1	12147	15	5000K	80	12

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
13.5W DIMMABLE ELITE PAR30 (REPLACES 75W)											
LED14P30D24KFL	13.5W PAR30 - 2400K 40°	120	13.5	75W	1000	74.1	-	40	2400K	80	12
LED14P30D24KNFL	13.5W PAR30 - 2400K 25°	120	13.5	75W	1000	74.1	-	25	2400K	80	12
LED14P30D24KNFLB	13.5W PAR30 - 2400K 25° - Black	120	13.5	75W	1000	74.1	-	25	2400K	80	12
LED14P30D24KSP	13.5W PAR30 - 2400K 15°	120	13.5	75W	1000	74.1	-	15	2400K	80	12
LED14P30D27KFL	13.5W PAR30 - 2700K 40°	120	13.5	75W	1050	77.8	2693	40	2700K	80	12
LED14P30D27KFLB	13.5W PAR30 - 2700K 40° - Black	120	13.5	75W	1050	77.8	2693	40	2700K	80	12
LED14P30D27KNFL	13.5W PAR30 - 2700K 25°	120	13.5	75W	1050	77.8	5808	25	2700K	80	12
LED14P30D27KNFLB	13.5W PAR30 - 2700K 25° - Black	120	13.5	75W	1050	77.8	5808	25	2700K	80	12
LED14P30D27KSP	13.5W PAR30 - 2700K 15°	120	13.5	75W	1050	77.8	10563	15	2700K	80	12
LED14P30D27KSPB	13.5W PAR30 - 2700K 15° - Black	120	13.5	75W	1050	77.8	10563	15	2700K	80	12
LED14P30D30KFL	13.5W PAR30 - 3000K 40°	120	13.5	75W	1050	77.8	2849	40	3000K	80	12
LED14P30D30KFLB	13.5W PAR30 - 3000K 40° - Black	120	13.5	75W	1050	77.8	2849	40	3000K	80	12
LED14P30D30KNFL	13.5W PAR30 - 3000K 25°	120	13.5	75W	1050	77.8	6392	25	3000K	80	12
LED14P30D30KNFLB	13.5W PAR30 - 3000K 25° - Black	120	13.5	75W	1050	77.8	6392	25	3000K	80	12
LED14P30D30KSP	13.5W PAR30 - 3000K 15°	120	13.5	75W	1050	77.8	11181	15	3000K	80	12
LED14P30D30KSPB	13.5W PAR30 - 3000K 15° - Black	120	13.5	75W	1050	77.8	11181	15	3000K	80	12
LED14P30D35KFL	13.5W PAR30 - 3500K 40°	120	13.5	75W	1050	77.8	2849	40	3500K	80	12
LED14P30D35KFLB	13.5W PAR30 - 3500K 40° - Black	120	13.5	75W	1050	77.8	2849	40	3500K	80	12
LED14P30D35KNFL	13.5W PAR30 - 3500K 25°	120	13.5	75W	1050	77.8	6392	25	3500K	80	12
LED14P30D35KSP	13.5W PAR30 - 3500K 15°	120	13.5	75W	1050	77.8	11181	15	3500K	80	12
LED14P30D41KFL	13.5W PAR30 - 4100K 40°	120	13.5	75W	1050	77.8	2661	40	4100K	80	12
LED14P30D41KFLB	13.5W PAR30 - 4100K 40° - Black	120	13.5	75W	1050	77.8	2661	40	4100K	80	12
LED14P30D41KNFL	13.5W PAR30 - 4100K 25°	120	13.5	75W	1050	77.8	5781	25	4100K	80	12
LED14P30D41KNFLB	13.5W PAR30 - 4100K 25° - Black	120	13.5	75W	1050	77.8	5781	25	4100K	80	12
LED14P30D41KSP	13.5W PAR30 - 4100K 15°	120	13.5	75W	1050	77.8	12465	15	4100K	80	12
LED14P30D41KSPB	13.5W PAR30 - 4100K 15° - Black	120	13.5	75W	1050	77.8	12465	15	4100K	80	12
LED14P30D50KFL	13.5W PAR30 - 5000K 40°	120	13.5	75W	1050	77.8	2837	40	5000K	80	12
LED14P30D50KFLB	13.5W PAR30 - 5000K 40° - Black	120	13.5	75W	1050	77.8	2837	40	5000K	80	12
LED14P30D50KNFL	13.5W PAR30 - 5000K 25°	120	13.5	75W	1050	77.8	5875	25	5000K	80	12
LED14P30D50KSP	13.5W PAR30 - 5000K 15°	120	13.5	75W	1050	77.8	10043	15	5000K	80	12





Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	------------	-----	-----	---------------

10.5W DIMMABLE ELITE PAR30 (REPLACES 75W)



LED12P30D24KFL	10.5W PAR30 - 2400K 40°	120	10.5	75W	800	76.2	-	40	2400K	80	12
LED12P30D24KNFL	10.5W PAR30 - 2400K 25°	120	10.5	75W	800	76.2	-	25	2400K	80	12
LED12P30D24KSP	10.5W PAR30 - 2400K 15°	120	10.5	75W	800	76.2	-	15	2400K	80	12
LED12P30D27KFL	10.5W PAR30 - 2700K 40°	120	10.5	75W	850	81	2202	40	2700K	80	12
LED12P30D27KFLB	10.5W PAR30 - 2700K 40° - Black	120	10.5	75W	850	81	2202	40	2700K	80	12
LED12P30D27KNFL	10.5W PAR30 - 2700K 25°	120	10.5	75W	850	81	5031	25	2700K	80	12
LED12P30D27KNFLB	10.5W PAR30 - 2700K 25° - Black	120	10.5	75W	850	81	5031	25	2700K	80	12
LED12P30D27KSP	10.5W PAR30 - 2700K 15°	120	10.5	75W	850	81	9193	15	2700K	80	12
LED12P30D27KSPB	10.5W PAR30 - 2700K 15° - Black	120	10.5	75W	850	81	9193	15	2700K	80	12
LED12P30D30KFL	12W PAR30 - 3000K 40°	120	10.5	75W	850	81	2389	40	3000K	80	12
LED12P30D30KFLB	12W PAR30 - 3000K 40° - Black	120	10.5	75W	850	81	2389	40	3000K	80	12
LED12P30D30KNFL	12W PAR30 - 3000K 25°	120	10.5	75W	850	81	5528	25	3000K	80	12
LED12P30D30KNFLB	12W PAR30 - 3000K 25° - Black	120	10.5	75W	850	81	5528	25	3000K	80	12
LED12P30D30KSP	12W PAR30 - 3000K 15°	120	10.5	75W	850	81	9006	15	3000K	80	12
LED12P30D30KSPB	12W PAR30 - 3000K 15° - Black	120	10.5	75W	850	81	9006	15	3000K	80	12
LED12P30D35KFL	12W PAR30 - 3500K 40°	120	10.5	75W	850	81	2389	40	3500K	80	12
LED12P30D35KNFL	12W PAR30 - 3500K 25°	120	10.5	75W	850	81	5528	25	3500K	80	12
LED12P30D35KSP	12W PAR30 - 3500K 15°	120	10.5	75W	850	81	9006	15	3500K	80	12
LED12P30D41KFL	12W PAR30 - 4100K 40°	120	10.5	75W	850	81	2561	40	4100K	80	12
LED12P30D41KFLB	12W PAR30 - 4100K 40° - Black	120	10.5	75W	850	81	2561	40	4100K	80	12
LED12P30D41KNFL	12W PAR30 - 4100K 25°	120	10.5	75W	850	81	5781	25	4100K	80	12
LED12P30D41KNFLB	12W PAR30 - 4100K 25° - Black	120	10.5	75W	850	81	5781	25	4100K	80	12
LED12P30D41KSP	12W PAR30 - 4100K 15°	120	10.5	75W	850	81	9491	15	4100K	80	12
LED12P30D41KSPB	12W PAR30 - 4100K 15° - Black	120	10.5	75W	850	81	9491	15	4100K	80	12
LED12P30D50KFL	12W PAR30 - 5000K 40°	120	10.5	75W	850	81	2437	40	5000K	80	12
LED12P30D50KFLB	12W PAR30 - 5000K 40° - Black	120	10.5	75W	850	81	2437	40	5000K	80	12
LED12P30D50KNFL	12W PAR30 - 5000K 25°	120	10.5	75W	850	81	5575	25	5000K	80	12
LED12P30D50KSP	12W PAR30 - 5000K 15°	120	10.5	75W	850	81	9647	15	5000K	80	12

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
10W DIMMABLE ELITE PAR30 SHORT NECK (REPLACES 75W) CONTINUED											
LED12P30SD24KFL	10W PAR30 Short Neck - 2400K 40°	120	10	75W	800	80	1619	40	2400K	80	12
LED12P30SD24KNFL	10W PAR30 Short Neck - 2400K 25°	120	10	75W	800	80	-	25	2400K	80	12
LED12P30SD24KSP	10W PAR30 Short Neck - 2400K 15°	120	10	75W	800	80	-	15	2400K	80	12
LED12P30SD27KFL	10W PAR30 Short Neck - 2700K 40°	120	10	75W	850	85	1817	40	2700K	80	12
LED12P30SD27KFLB	10W PAR30 Short Neck - 2700K 40° - Black	120	10	75W	850	85	1817	40	2700K	80	12
LED12P30SD27KNFL	10W PAR30 Short Neck - 2700K 40°	120	10	75W	850	85	4025	25	2700K	80	12
LED12P30SD27KNFLB	10W PAR30 Short Neck - 2700K 40° - Black	120	10	75W	850	85	4025	25	2700K	80	12
LED12P30SD27KSP	10W PAR30 Short Neck - 2700K 15°	120	10	75W	850	85	8042	15	2700K	80	12
LED12P30SD30KFL	10W PAR30 Short Neck - 3000K 40°	120	10	75W	850	85	1858	40	3000K	80	12
LED12P30SD30KFLB	10W PAR30 Short Neck - 3000K 40° - Black	120	10	75W	850	85	1858	40	3000K	80	12
LED12P30SD30KNFL	10W PAR30 Short Neck - 3000K 25°	120	10	75W	850	85	4968	25	3000K	80	12
LED12P30SD30KNFLB	10W PAR30 Short Neck - 3000K 25° - Black	120	10	75W	850	85	4968	25	3000K	80	12
LED12P30SD30KSP	10W PAR30 Short Neck - 3000K 15°	120	10	75W	850	85	8380	15	3000K	80	12
LED12P30SD30KSPB	10W PAR30 Short Neck - 3000K 15° - Black	120	10	75W	850	85	8380	15	3000K	80	12
LED12P30SD35KFL	10W PAR30 Short Neck - 3500K 40°	120	10	75W	850	85	2232	40	3500K	80	12
LED12P30SD35KFLB	10W PAR30 Short Neck - 3500K 40° - Black	120	10	75W	850	85	2232	40	3500K	80	12
LED12P30SD35KNFL	10W PAR30 Short Neck - 3500K 25°	120	10	75W	850	85	4402	25	3500K	80	12
LED12P30SD35KNFLB	10W PAR30 Short Neck - 3500K 25° - Black	120	10	75W	850	85	4402	25	3500K	80	12
LED12P30SD35KSP	10W PAR30 Short Neck - 3500K 15°	120	10	75W	850	85	8380	15	3500K	80	12
LED12P30SD41KFL	10W PAR30 Short Neck - 4100K 40°	120	10	75W	850	85	2247	40	4100K	80	12
LED12P30SD41KFLB	10W PAR30 Short Neck - 4100K 40° - Black	120	10	75W	850	85	2247	40	4100K	80	12
LED12P30SD41KNFL	10W PAR30 Short Neck - 4100K 25°	120	10	75W	850	85	4895	25	4100K	80	12
LED12P30SD41KSP	10W PAR30 Short Neck - 4100K 15°	120	10	75W	850	85	8710	15	4100K	80	12
LED12P30SD50KFL	10W PAR30 Short Neck - 5000K 40°	120	10	75W	850	85	2454	40	5000K	80	12
LED12P30SD50KNFL	10W PAR30 Short Neck - 5000K 25°	120	10	75W	850	85	5260	25	5000K	80	12



Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing



Black Housing option available. Add "B" to the end of item #.

Consult www.tcp.com for warranty information.



Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	------------	-----	-----	---------------

7W DIMMABLE ELITE PAR20 (REPLACES 50W)



LED8P20D24KFL	7W PAR20 - 2400K 40°	120	7	50W	550	78.6	1058	40	2400K	80	12
LED8P20D24KNFL	7W PAR20 - 2400K 25°	120	7	50W	550	78.6	1894	25	2400K	80	12
LED8P20D27KFL	7W PAR20 - 2700K 40°	120	7	50W	600	85.7	1208	40	2700K	80	12
LED8P20D27KFLB	7W PAR20 - 2700K 40° - Black	120	7	50W	600	85.7	1208	40	2700K	80	12
LED8P20D27KNFL	7W PAR20 - 2700K 25°	120	7	50W	600	85.7	2030	25	2700K	80	12
LED8P20D27KSP	7W PAR20 - 2700K 15°	120	7	50W	600	85.7	4898	15	2700K	80	12
LED8P20D30KFL	7W PAR20 - 3000K 40°	120	7	50W	625	89.3	1187	40	3000K	80	12
LED8P20D30KFLB	7W PAR20 - 3000K 40° - Black	120	7	50W	625	89.3	1187	40	3000K	80	12
LED8P20D30KNFL	7W PAR20 - 3000K 25°	120	7	50W	625	89.3	2050	25	3000K	80	12
LED8P20D30KNFLB	7W PAR20 - 3000K 25° - Black	120	7	50W	625	89.3	2050	25	3000K	80	12
LED8P20D30KSP	7W PAR20 - 3000K 15°	120	7	50W	625	89.3	5391	15	3000K	80	12
LED8P20D35KFL	7W PAR20 - 3500K 40°	120	7	50W	675	96.4	1187	25	3500K	80	12
LED8P20D35KNFL	7W PAR20 - 3500K 25°	120	7	50W	675	96.4	2050	25	3500K	80	12
LED8P20D41KFL	7W PAR20 - 4100K 40°	120	7	50W	675	96.4	1383	40	4100K	80	12
LED8P20D41KFLB	7W PAR20 - 4100K 40° - Black	120	7	50W	675	96.4	1383	40	4100K	80	12
LED8P20D41KNFL	7W PAR20 - 4100K 25°	120	7	50W	675	96.4	2174	25	4100K	80	12
LED8P20D41KNFLB	7W PAR20 - 4100K 25° - Black	120	7	50W	675	96.4	2174	25	4100K	80	12
LED8P20D41KSP	7W PAR20 - 4100K 15°	120	7	50W	675	96.4	5411	15	4100K	80	12
LED8P20D50KFL	7W PAR20 - 5000K 40°	120	7	50W	700	100	1330	40	5000K	80	12
LED8P20D50KFLB	7W PAR20 - 5000K 40° - Black	120	7	50W	700	100	1330	40	5000K	80	12
LED8P20D50KNFL	7W PAR20 - 5000K 25°	120	7	50W	700	100	2172	25	5000K	80	12
LED8P20D50KSP	7W PAR20 - 5000K 15°	120	7	50W	700	100	5599	15	5000K	80	12

Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing



5 YEAR WARRANTY

Black Housing option available. Add "B" to the end of item #.

Consult www.tcp.com for warranty information.

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
25,000 HOUR DIMMABLE SMD PARS											
15W DIMMABLE SMD PAR38 (REPLACES 150W)											
L150P38D2527KFL	15W PAR38 - 2700K 40°	120	15	150W	1450	96.7	3403	40	2700K	80	12
L150P38D2527KNFL	15W PAR38 - 2700K 25°	120	15	150W	1450	96.7	7563	25	2700K	80	12
L150P38D2530KFL	15W PAR38 - 3000K 40°	120	15	150W	1500	100	3470	40	3000K	80	12
L150P38D2530KNFL	15W PAR38 - 3000K 25°	120	15	150W	1500	100	7624	25	3000K	80	12
L150P38D2541KFL	15W PAR38 - 4100K 40°	120	15	150W	1550	103.3	3554	40	4100K	80	12
L150P38D2541KNFL	15W PAR38 - 4100K 25°	120	15	150W	1550	103.3	7800	25	4100K	80	12
L150P38D2550KFL	15W PAR38 - 5000K 40°	120	15	150W	1600	106.7	3880	40	5000K	80	12
L150P38D2550KNFL	15W PAR38 - 5000K 25°	120	15	150W	1600	106.7	8028	25	5000K	80	12
13W DIMMABLE SMD PAR38 (REPLACES 120W)											
L120P38D2527KFL	13W PAR38 - 2700K 40°	120	13	120W	1100	84.6	2584	40	2700K	80	12
L120P38D2527KNFL	13W PAR38 - 2700K 25°	120	13	120W	1100	84.6	6235	25	2700K	80	12
L120P38D2530KFL	13W PAR38 - 3000K 40°	120	13	120W	1200	92.3	2508	40	3000K	80	12
L120P38D2530KNFL	13W PAR38 - 3000K 25°	120	13	120W	1200	92.3	6661	25	3000K	80	12
L120P38D2540KFL	13W PAR38 - 4000K 40°	120	13	120W	1250	96.2	2348	40	4000K	80	12
L120P38D2540KNFL	13W PAR38 - 4000K 25°	120	13	120W	1250	96.2	6482	25	4000K	80	12
L120P38D2550KFL	13W PAR38 - 5000K 40°	120	13	120W	1250	96.2	2562	40	5000K	80	12
L120P38D2550KNFL	13W PAR38 - 5000K 25°	120	13	120W	1250	96.2	6513	25	5000K	80	12
10W DIMMABLE SMD PAR38 (REPLACES 90W)											
L90P38D2527KFL	10W PAR38 - 2700K 40°	120	10	90W	900	90	1872	40	2700K	80	12
L90P38D2527KNFL	10W PAR38 - 2700K 25°	120	10	90W	900	90	4199	25	2700K	80	12
L90P38D2530KFL	10W PAR38 - 3000K 40°	120	10	90W	900	90	1964	40	3000K	80	12
L90P38D2530KNFL	10W PAR38 - 3000K 25°	120	10	90W	900	90	4384	25	3000K	80	12
L90P38D2540KFL	10W PAR38 - 4000K 40°	120	10	90W	950	95	2017	40	4000K	80	12
L90P38D2540KNFL	10W PAR38 - 4000K 25°	120	10	90W	950	95	4413	25	4000K	80	12
L90P38D2550KFL	10W PAR38 - 5000K 40°	120	10	90W	950	95	2222	40	5000K	80	12
L90P38D2550KNFL	10W PAR38 - 5000K 25°	120	10	90W	950	95	4383	25	5000K	80	12





Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	------------	-----	-----	---------------

25,000 HOUR DIMMABLE SMD PARS

9W DIMMABLE SMD PAR30 (REPLACES 75W)



L75P30D2527KFL	9W PAR30 - 2700K 40°	120	9	75W	700	77.8	1640	40	2700K	80	12
L75P30D2527KNFL	9W PAR30 - 2700K 25°	120	9	75W	700	77.8	3419	25	2700K	80	12
L75P30D2530KFL	9W PAR30 - 3000K 40°	120	9	75W	720	80	1658	40	3000K	80	12
L75P30D2530KNFL	9W PAR30 - 3000K 25°	120	9	75W	720	80	3392	25	3000K	80	12
L75P30D2540KFL	9W PAR30 - 4000K 40°	120	9	75W	770	85.6	1759	40	4000K	80	12
L75P30D2540KNFL	9W PAR30 - 4000K 25°	120	9	75W	770	85.6	3701	25	4000K	80	12
L75P30D2550KFL	9W PAR30 - 5000K 40°	120	9	75W	770	85.6	1790	40	5000K	80	12
L75P30D2550KNFL	9W PAR30 - 5000K 25°	120	9	75W	770	85.6	3874	25	5000K	80	12

9.5W DIMMABLE SMD PAR30 SHORT NECK (REPLACES 75W)



L75P30SD2527KFL	9.5W PAR30 Short Neck - 2700K 40°	120	9.5	75W	720	75.8	1714	40	2700K	80	12
L75P30SD2527KNFL	9.5W PAR30 Short Neck - 2700K 25°	120	9.5	75W	720	75.8	3051	25	2700K	80	12
L75P30SD2530KFL	9.5W PAR30 Short Neck - 3000K 40°	120	9.5	75W	720	75.8	1621	40	3000K	80	12
L75P30SD2530KNFL	9.5W PAR30 Short Neck - 3000K 25°	120	9.5	75W	720	75.8	3064	25	3000K	80	12
L75P30SD2540KFL	9.5W PAR30 Short Neck - 4000K 40°	120	9.5	75W	770	81.1	1714	40	4000K	80	12
L75P30SD2540KNFL	9.5W PAR30 Short Neck - 4000K 25°	120	9.5	75W	770	81.1	2930	25	4000K	80	12
L75P30SD2550KFL	9.5W PAR30 Short Neck - 5000K 40°	120	9.5	75W	770	81.1	1847	40	5000K	80	12
L75P30SD2550KNFL	9.5W PAR30 Short Neck - 5000K 25°	120	9.5	75W	770	81.1	3274	25	5000K	80	12

7W DIMMABLE SMD PAR20 (REPLACES 50W)



L50P20D2527KFL	7W PAR20 - 2700K 40°	120	7	50W	525	75	1208	40	2700K	80	12
L50P20D2527KNFL	7W PAR20 - 2700K 25°	120	7	50W	525	75	2030	25	2700K	80	12
L50P20D2530KFL	7W PAR20 - 3000K 40°	120	7	50W	525	75	1187	40	3000K	80	12
L50P20D2530KNFL	7W PAR20 - 3000K 25°	120	7	50W	525	75	2050	25	3000K	80	12
L50P20D2540KFL	7W PAR20 - 4000K 40°	120	7	50W	575	82.1	1383	40	4000K	80	12
L50P20D2540KNFL	7W PAR20 - 4000K 25°	120	7	50W	575	82.1	2174	25	4000K	80	12
L50P20D2550KFL	7W PAR20 - 5000K 40°	120	7	50W	575	82.1	1330	40	5000K	80	12
L50P20D2550KNFL	7W PAR20 - 5000K 25°	120	7	50W	575	82.1	2172	25	5000K	80	12

50

Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing



5 YEAR WARRANTY

Consult www.tpci.com for warranty information.

Black Housing option available. Add "B" to the end of item #.

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	------------	-----	-----	---------------

25,000 HOUR DIMMABLE HIGH OUTPUT, HIGH CRI PARS

18.5W DIMMABLE DESIGNER ELITE HIGH OUTPUT HIGH CRI PAR38 (REPLACES 120W) CRI>90 R9>50

LED17HOP38D27KFL95	18.5W DIM High Output, High CRI P38 - 2700K 40°	120	18.5	150W	1300	70.3	2231	40	2700K	90	12
LED17HOP38D27KNFL95	18.5W DIM High Output, High CRI P38 - 2700K 25°	120	18.5	150W	1300	70.3	5382	25	2700K	90	12
LED17HOP38D27KSP95	18.5W DIM High Output, High CRI P38 - 2700K 15°	120	18.5	150W	1300	70.3	12059	15	2700K	90	12
LED17HOP38D30KFL95	18.5W DIM High Output, High CRI P38 - 3000K 40°	120	18.5	150W	1300	70.3	2231	40	3000K	90	12
LED17HOP38D30KNFL95	18.5W DIM High Output, High CRI P38 - 3000K 25°	120	18.5	150W	1300	70.3	5382	25	3000K	90	12
LED17HOP38D30KSP95	18.5W DIM High Output, High CRI P38 - 3000K 15°	120	18.5	150W	1300	70.3	12059	15	3000K	90	12



25,000 HOUR DIMMABLE HIGH CRI PARS

15W DIMMABLE DESIGNER ELITE HIGH CRI PAR38 (REPLACES 90W) CRI>90 R9>50

LED17P38D27KFL95	15W DIM High CRI P38 - 2700K 40°	120	15	90W	1050	70	1533	40	2700K	90	12
LED17P38D27KNFL95	15W DIM High CRI P38 - 2700K 25°	120	15	90W	1050	70	3698	25	2700K	90	12
LED17P38D27KSP95	15W DIM High CRI P38 - 2700K 15°	120	15	90W	1050	70	8285	15	2700K	90	12
LED17P38D30KFL95	15W DIM High CRI P38 - 3000K 40°	120	15	90W	1050	70	1533	40	3000K	90	12
LED17P38D30KNFL95	15W DIM High CRI P38 - 3000K 25°	120	15	90W	1050	70	3698	25	3000K	90	12

13.5W DIMMABLE DESIGNER ELITE HIGH CRI PAR38 (REPLACES 75W)

LED14P38D27KNFL95	13.5W DIM High CRI P38 - 2700K 25°	120	13.5	75W	1000	74.1	3698	25	2700K	90	12
-------------------	------------------------------------	-----	------	-----	------	------	------	----	-------	----	----

13.5W DIMMABLE DESIGNER ELITE HIGH CRI PAR30 (REPLACES 75W)

LED14P30D27KNFL95	13.5W DIM High CRI P30 - 2700K 25°	120	13.5	75W	1000	74.1	2910	25	2700K	90	12
LED14P30D30KNFL95	13.5W DIM High CRI P30 - 3000K 25°	120	13.5	75W	1000	74.1	2910	25	3000K	90	12



10.5W DIMMABLE DESIGNER ELITE HIGH CRI PAR30 (REPLACES 65W)

LED12P30D30KNFL95	10.5W DIM High CRI P30 - 3000K 25°	120	10.5	65W	750	71.4	2118	25	3000K	90	12
-------------------	------------------------------------	-----	------	-----	-----	------	------	----	-------	----	----

10W DIMMABLE DESIGNER ELITE HIGH CRI PAR30 SHORT NECK (REPLACES 65W)

LED12P30SD27KFL95	10W DIM High CRI P30 Short Neck - 2700K 40°	120	10	65W	750	75	957	40	2700K	90	12
LED12P30SD27KNFL95	10W DIM High CRI P30 Short Neck - 2700K 25°	120	10	65W	750	75	2118	25	2700K	90	12
LED12P30SD30KFL95	10W DIM High CRI P30 Short Neck - 3000K 40°	120	10	65W	750	75	957	40	3000K	90	12
LED12P30SD30KNFL95	10W DIM High CRI P30 Short Neck - 3000K 25°	120	10	65W	750	75	2118	25	3000K	90	12
LED12P30SD30KSP95	10W DIM High CRI P30 Short Neck - 3000K 15°	120	10	65W	750	75	4481	15	3000K	90	12



Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing



Consult www.tcp.com for warranty information.

Black Housing option available. Add "B" to the end of item #.



Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	Beam Angle	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------------	-----	-----	---------------

25,000 HOUR DIMMABLE ELITE BRS

17W DIMMABLE ELITE BR40 (REPLACES 90W)



LED17BR40D24K	17W Dim BR40 - 2400K	120	17	90W	1250	73.5	110	2400K	80	12
LED17BR40D27K	17W Dim BR40 - 2700K	120	17	90W	1400	82.4	110	2700K	80	12
LED17BR40D30K	17W Dim BR40 - 3000K	120	17	90W	1400	82.4	110	3000K	80	12
LED17BR40D41K	17W Dim BR40 - 4100K	120	17	90W	1400	82.4	110	4100K	80	12
LED17BR40D50K	17W Dim BR40 - 5000K	120	17	90W	1400	82.4	110	5000K	80	12

14W DIMMABLE ELITE BR40 (REPLACES 75W)

L85BR40D2524K	14W Dim BR40 - 2400K	120	14	75W	1050	75	110	2400K	80	12
L85BR40D2527K	14W Dim BR40 - 2700K	120	14	75W	1100	78.6	110	2700K	80	12
L85BR40D2530K	14W Dim BR40 - 3000K	120	14	75W	1150	82.1	110	3000K	80	12
L85BR40D2541K	14W Dim BR40 - 4100K	120	14	75W	1200	85.7	110	4100K	80	12
L85BR40D2550K	14W Dim BR40 - 5000K	120	14	75W	1200	85.7	110	5000K	80	12

10.5W DIMMABLE ELITE BR30 (REPLACES 65W)



LED12BR30D24K	10.5W Dim BR30 - 2400K	120	10.5	65W	680	64.8	110	2400K	80	12
LED12BR30D27K	10.5W Dim BR30 - 2700K	120	10.5	65W	850	81.0	110	2700K	80	12
LED12BR30D30K	10.5W Dim BR30 - 3000K	120	10.5	65W	850	81.0	110	3000K	80	12
LED12BR30D41K	10.5W Dim BR30 - 4100K	120	10.5	65W	850	81.0	110	4100K	80	12
LED12BR30D50K	10.5W Dim BR30 - 5000K	120	10.5	65W	850	81.0	110	5000K	80	12

9.5W DIMMABLE ELITE BR30 (REPLACES 65W)



LED9BR30D24K	9.5W Dim BR30 - 2400K	120	9.5	65W	600	63.2	110	2400K	80	12
LED9BR30D27K	9.5W Dim BR30 - 2700K	120	9.5	65W	700	73.7	110	2700K	80	12
LED9BR30D30K	9.5W Dim BR30 - 3000K	120	9.5	65W	700	73.7	110	3000K	80	12
LED9BR30D41K	9.5W Dim BR30 - 4100K	120	9.5	65W	750	78.9	110	4100K	80	12
LED9BR30D50K	9.5W Dim BR30 - 5000K	120	9.5	65W	750	78.9	110	5000K	80	12

9W DIMMABLE ELITE R20 (REPLACES 60W)



LED10R20D24K	9W Dim R20 - 2400K	120	9	60W	520	57.8	110	2400K	80	12
LED10R20D27K	9W Dim R20 - 2700K	120	9	60W	660	73.3	110	2700K	80	12
LED10R20D30K	9W Dim R20 - 3000K	120	9	60W	700	77.8	110	3000K	80	12
LED10R20D41K	9W Dim R20 - 4100K	120	9	60W	725	80.6	110	4100K	80	12
LED10R20D50K	9W Dim R20 - 5000K	120	9	60W	750	83.3	110	5000K	80	12

7.5W DIMMABLE ELITE R20 (REPLACES 50W)

L7R20D2524K	7.5W Dim R20 - 2400K	120	7.5	50W	400	53.3	110	2400K	80	12
L7R20D2527K	7.5W Dim R20 - 2700K	120	7.5	50W	525	70	110	2700K	80	12
L7R20D2530K	7.5W Dim R20 - 3000K	120	7.5	50W	525	70	110	3000K	80	12
L7R20D2541K	7.5W Dim R20 - 4100K	120	7.5	50W	525	70	110	4100K	80	12
L7R20D2550K	7.5W Dim R20 - 5000K	120	7.5	50W	525	70	110	5000K	80	12

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	Beam Angle	CCT	CRI	Case Quantity
15,000 HOUR DIMMABLE ELITE BRS 2 Pack										
9W DIMMABLE ELITE BR30 (REPLACES 65W)										
L8BR30D1527K2	9W Dim BR30 - 2700K 2 Pack	120	9	65W	650	72.2	110	2700K	80	12
L8BR30D1530K2	9W Dim BR30 - 3000K 2 Pack	120	9	65W	650	72.2	110	3000K	80	12
L8BR30D1541K2	9W Dim BR30 - 4100K 2 Pack	120	9	65W	650	72.2	110	4100K	80	12
L8BR30D1550K2	9W Dim BR30 - 5000K 2 Pack	120	9	65W	650	72.2	110	5000K	80	12
25,000 HOUR NON DIMMABLE ELITE BRS										
17W NON DIMMABLE ELITE BR40 (REPLACES 90W)										
LED17BR4027K	14W Non Dim BR40 - 2700K	120	17	90W	1400	82.4	110	2700K	80	12
LED17BR4030K	14W Non Dim BR40 - 3000K	120	17	90W	1400	82.4	110	3000K	80	12
LED17BR4041K	14W Non Dim BR40 - 4100K	120	17	90W	1400	82.4	110	4100K	80	12
10.5W NON DIMMABLE ELITE BR30 (REPLACES 65W)										
LED12BR3027K	10.5W Non Dim BR30 - 2700K	120	10.5	65W	850	81.0	110	2700K	80	12
LED12BR3030K	10.5W Non Dim BR30 - 3000K	120	10.5	65W	850	81.0	110	3000K	80	12
LED12BR3041K	10.5W Non Dim BR30 - 4100K	120	10.5	65W	850	81.0	110	4100K	80	12
8.5W NON DIMMABLE ELITE BR30 (REPLACES 65W)										
LED10BR3027K	8.5W Non Dim BR30 - 2700K	120	8.5	65W	650	76.5	110	2700K	80	12
LED10BR3030K	8.5W Non Dim BR30 - 3000K	120	8.5	65W	650	76.5	110	3000K	80	12
LED10BR3041K	8.5W Non Dim BR30 - 4100K	120	8.5	65W	650	76.5	110	4100K	80	12
LED10BR3050K	8.5W Non Dim BR30 - 5000K	120	8.5	65W	650	76.5	110	5000K	80	12
25,000 HOUR DIMMABLE ELITE COLORED BRS										
12W DIMMABLE ELITE BR30 - COLORED LENS										
LED12BR30DAMB	12W Elite BR30 Amber Lens	120	9.5	65W	NA	-	110	Amber	-	12



Many items are ENERGY STAR® qualified.
Visit energystar.gov for a full listing

5 YEAR WARRANTY
Consult www.tcp.com for warranty information.

Other housing colors are available by special request.

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	-----	-----	---------------

25,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 100W)

15W DIMMABLE A19 - ELITE OMNIDIRECTIONAL A-LAMP (REPLACES 100W)



L15A19D2527K	Dimmable 15W Omnidirectional A19 - 2700K	120	15	100W	1600	106.7	2700K	80	12
L15A19D2530K	Dimmable 15W Omnidirectional A19 - 3000K	120	15	100W	1600	106.7	3000K	80	12
L15A19D2541K	Dimmable 15W Omnidirectional A19 - 4100K	120	15	100W	1600	106.7	4100K	80	12
L15A19D2550K	Dimmable 15W Omnidirectional A19 - 5000K	120	15	100W	1600	106.7	5000K	80	12

15,000 HOUR OMNIDIRECTIONAL A-LAMPS (REPLACES 100W)

15W DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 100W)



L15A21D1527K	Dimmable 15W Omnidirectional A19 - 2700K	120	15	100W	1600	106.7	2700K	80	12
L15A21D1530K	Dimmable 15W Omnidirectional A19 - 3000K	120	15	100W	1650	110	3000K	80	12
L15A21D1541K	Dimmable 15W Omnidirectional A19 - 4100K	120	15	100W	1700	113.3	4100K	80	12
L15A21D1550K	Dimmable 15W Omnidirectional A19 - 5000K	120	15	100W	1750	116.7	5000K	80	12

15W NON-DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 100W)



L16A19N1527K	Non-Dimmable 15W Omnidirectional A19 - 2700K	120	15	100W	1600	106.7	2700K	80	12
L16A19N1530K	Non-Dimmable 15W Omnidirectional A19 - 3000K	120	15	100W	1650	110	3000K	80	12
L16A19N1541K	Non-Dimmable 15W Omnidirectional A19 - 4100K	120	15	100W	1700	113.3	4100K	80	12
L16A19N1550K	Non-Dimmable 15W Omnidirectional A19 - 5000K	120	15	100W	1750	116.7	5000K	80	12

10,000 HOUR GENERAL PURPOSE A-LAMPS (REPLACES 100W)

14W NON-DIMMABLE A19 - GENERAL PURPOSE A-LAMP (REPLACES 100W) 4 PACK



L16A19N1027K4	Non-Dimmable 14W General Purpose A19 - 2700K 4 Pack	120	14	100W	1500	107.1	2700K	80	12
L16A19N1041K4	Non-Dimmable 14W General Purpose A19 - 4100K 4 Pack	120	14	100W	1500	107.1	4100K	80	12

Many items are ENERGY STAR® qualified.
Visit energystar.gov for a full listing

Consult www.tpci.com for warranty information.



5 YEAR WARRANTY
25,000 HOUR LAMPS

3 YEAR WARRANTY
15,000 HOUR LAMPS

1 YEAR WARRANTY
10,000 HOUR LAMPS

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	-----	-----	---------------

25,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 75W)

11.5W DIMMABLE A19 - ELITE OMNIDIRECTIONAL A-LAMP (REPLACES 75W)

L11A19D2527K	Dimmable 11.5W Omnidirectional A19 - 2700K	120	11.5	75W	1100	95.7	2700K	80	12
L11A19D2530K	Dimmable 11.5W Omnidirectional A19 - 3000K	120	11.5	75W	1100	95.7	3000K	80	12
L11A19D2541K	Dimmable 11.5W Omnidirectional A19 - 4100K	120	11.5	75W	1100	95.7	4100K	80	12
L11A19D2550K	Dimmable 11.5W Omnidirectional A19 - 5000K	120	11.5	75W	1100	95.7	5000K	80	12



15,000 HOUR OMNIDIRECTIONAL A-LAMPS (REPLACES 75W)

11W NON-DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 75W)

L11A19N1527K	Non-Dimmable 11W Omnidirectional A19 - 2700K	120	11	75W	1100	100	2700K	80	12
L11A19N1530K	Non-Dimmable 11W Omnidirectional A19 - 3000K	120	11	75W	1100	100	3000K	80	12
L11A19N1541K	Non-Dimmable 11W Omnidirectional A19 - 4100K	120	11	75W	1100	100	4100K	80	12
L11A19N1550K	Non-Dimmable 11W Omnidirectional A19 - 5000K	120	11	75W	1100	100	5000K	80	12



25,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 60W)

9W DIMMABLE A19 - ELITE OMNIDIRECTIONAL A-LAMP (REPLACES 60W)

L9A19D2524K	Dimmable 9W OmniDirectional A19 - 2400K	120	9	60W	700	77.7	2400K	80	12
L9A19D2527K	Dimmable 9W OmniDirectional A19 - 2700K	120	9	60W	800	88.9	2700K	80	12
L9A19D2530K	Dimmable 9W OmniDirectional A19 - 3000K	120	9	60W	800	88.9	3000K	80	12
L9A19D2541K	Dimmable 9W OmniDirectional A19 - 4100K	120	9	60W	825	91.7	4100K	80	12
L9A19D2550K	Dimmable 9W OmniDirectional A19 - 5000K	120	9	60W	825	91.7	5000K	80	12



Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing

Consult www.tcp.com for warranty information.



5 YEAR WARRANTY
25,000 HOUR LAMPS

3 YEAR WARRANTY
15,000 HOUR LAMPS

1 YEAR WARRANTY
10,000 HOUR LAMPS

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	-----	-----	---------------

15,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 60W)

9W DIMMABLE A19 - OMNIDIRECTIONAL A-LAMP (REPLACES 60W)



L9A19D1527K	Dimmable 9W OmniDirectional A19 - 2700K	120	9	60W	800	88.9	2700K	80	12
L9A19D1530K	Dimmable 9W OmniDirectional A19 - 3000K	120	9	60W	800	88.9	3000K	80	12
L9A19D1541K	Dimmable 9W OmniDirectional A19 - 4100K	120	9	60W	825	91.7	4100K	80	12
L9A19D1550K	Dimmable 9W OmniDirectional A19 - 5000K	120	9	60W	825	91.7	5000K	80	12

9W DIMMABLE A19 - OMNIDIRECTIONAL A-LAMP (REPLACES 60W) 4 PACK

L9A19D1527K4	Dimmable 9W OmniDirectional A19 4 Pack - 2700K	120	9	60W	800	88.9	2700K	80	12
L9A19D1530K4	Dimmable 9W OmniDirectional A19 4 Pack - 3000K	120	9	60W	800	88.9	3000K	80	12
L9A19D1541K4	Dimmable 9W OmniDirectional A19 4 Pack - 4100K	120	9	60W	825	91.7	4100K	80	12
L9A19D1550K4	Dimmable 9W OmniDirectional A19 4 Pack - 5000K	120	9	60W	825	91.7	5000K	80	12

9W NON-DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 60W)



L60A19N1527K	Non-Dimmable 9W Omnidirectional A19 - 2700K	120	9	60W	800	88.9	2700K	80	12
L60A19N1530K	Non-Dimmable 9W Omnidirectional A19 - 3000K	120	9	60W	800	88.9	3000K	80	12
L60A19N1541K	Non-Dimmable 9W Omnidirectional A19 - 4100K	120	9	60W	850	94.4	4100K	80	12
L60A19N1550K	Non-Dimmable 9W Omnidirectional A19 - 5000K	120	9	60W	850	94.4	5000K	80	12

10,000 HOUR GENERAL PURPOSE A-LAMPS (REPLACES 60W)

9.5W NON-DIMMABLE A19 - GENERAL PURPOSE A-LAMP (REPLACES 60W) 4 PACK



L9A19N1027K4	Non-Dimmable 9.5W General Purpose A19 - 2700K 4 Pack	120	9	60W	800	84.2	2700K	80	12
L9A19N1030K4	Non-Dimmable 9.5W General Purpose A19 - 3000K 4 Pack	120	9	60W	800	84.2	3000K	80	12
L9A19N1041K4	Non-Dimmable 9.5W General Purpose A19 - 4100K 4 Pack	120	9	60W	800	84.2	4100K	80	12
L9A19N1050K4	Non-Dimmable 9.5W General Purpose A19 - 5000K 4 Pack	120	9	60W	800	84.2	5000K	80	12

25,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 40W)

6W DIMMABLE A19 - ELITE OMNIDIRECTIONAL A-LAMP (REPLACES 40W)



L40A19D2524K	Dimmable 6W Omnidirectional A19 - 2400K	120	6	40W	375	62.5	2400K	80	12
L40A19D2527K	Dimmable 6W Omnidirectional A19 - 2700K	120	6	40W	480	80.0	2700K	80	12
L40A19D2530K	Dimmable 6W Omnidirectional A19 - 3000K	120	6	40W	480	80.0	3000K	80	12
L40A19D2541K	Dimmable 6W Omnidirectional A19 - 4100K	120	6	40W	500	83.3	4100K	80	12
L40A19D2550K	Dimmable 6W Omnidirectional A19 - 5000K	120	6	40W	525	87.2	5000K	80	12

15,000 HOUR OMNIDIRECTIONAL A-LAMPS (REPLACES 40W)

6W NON-DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 40W)



L6A19N1527K	Non-Dimmable 6W Omnidirectional A19 - 2700K	120	6	40W	480	80.0	2700K	80	12
L6A19N1530K	Non-Dimmable 6W Omnidirectional A19 - 3000K	120	6	40W	480	80.0	3000K	80	12
L6A19N1541K	Non-Dimmable 6W Omnidirectional A19 - 4100K	120	6	40W	480	80.0	4100K	80	12
L6A19N1550K	Non-Dimmable 6W Omnidirectional A19 - 5000K	120	6	40W	480	80.0	5000K	80	12

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Case Quantity	
25,000 HOUR ELITE GU24 BASED A-LAMPS (REPLACES 60W)										
10W GU24 BASED DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 60W)										
LED10A19GUDOD27K	Dimmable 10W GU24 OmniDirectional A19 - 2700K	120	10	60W	850	85	2700K	80	12	
LED10A19GUDOD30K	Dimmable 10W GU24 OmniDirectional A19 - 3000K	120	10	60W	850	85	3000K	80	12	
LED10A19GUDOD41K	Dimmable 10W GU24 OmniDirectional A19 - 4100K	120	10	60W	850	85	4100K	80	12	



25,000 HOUR ELITE GU24 BASED A-LAMPS (REPLACES 100W)										
14W GU24 BASED DIMMABLE A21 - OMNIDIRECTIONAL (REPLACES 100W)										
L14A21GUD2527K	Dimmable 14W GU24 OmniDirectional A21 - 2700K	120	14	100W	1600	114.3	2700K	80	12	
L14A21GUD2530K	Dimmable 14W GU24 OmniDirectional A21 - 3000K	120	14	100W	1600	114.3	3000K	80	12	
L14A21GUD2541K	Dimmable 14W GU24 OmniDirectional A21 - 4100K	120	14	100W	1700	121.4	4100K	80	12	
L14A21GUD2550K	Dimmable 14W GU24 OmniDirectional A21 - 5000K	120	14	100W	1700	121.4	5000K	80	12	



25,000 HOUR ELITE 60W WET LOCATION A-LAMPS (REPLACES 60W)										
9.5W WET LOCATION A19 OMNIDIRECTIONAL A-LAMP (REPLACES 60W)										
LED10A19DOD27KW	Dimmable 9.5W Omnidirectional Wet Location A19 - 2700K	120	9.5	60W	800	84.2	2700K	80	12	
LED10A19DOD30KW	Dimmable 9.5W Omnidirectional Wet Location A19 - 3000K	120	9.5	60W	825	86.8	3000K	80	12	
LED10A19DOD41KW	Dimmable 9.5W Omnidirectional Wet Location A19 - 4100K	120	9.5	60W	850	89.5	4100K	80	12	
LED10A19DOD50KW	Dimmable 9.5W Omnidirectional Wet Location A19 - 5000K	120	9.5	60W	850	89.5	5000K	80	12	



Item Number	Item Description	Voltage	Wattage/Lumens			Wattage/LPW			CCT	CRI	Case Quantity
			16W	8W	4W	16W	8W	4W			
25,000 HOUR ELITE 100W LED THREE WAY A-LAMPS (REPLACES 100W/60W/40W)											
16W/8W/4W A21 - THREE WAY A-LAMPS (REPLACES 100W/60W/40W)											
LED16A21D3WAY27K	16W/8W/4W A21 - 2700K	120	1600	800	480	100	100	120	2700K	80	12
LED16A21D3WAY30K	16W/8W/4W A21 - 3000K	120	1600	800	480	100	100	120	3000K	80	12
LED16A21D3WAY41K	16W/8W/4W A21 - 4100K	120	1600	800	480	100	100	120	4100K	80	12
LED16A21D3WAY50K	16W/8W/4W A21 - 5000K	120	1600	800	480	100	100	120	5000K	80	12





Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	Beam Angle	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------------	-----	-----	---------------

25,000 HOUR ELITE GU5.3 50W DIMMABLE LED MR16

7W DIMMABLE ELITE VALUE GU5.3 12V MR16 (50W EQUIVALENT)



LED712VMR16V24KNFL	7W 12V MR16 - 2400K 20°	12	7	50W	450	64.3	20	2400K	80	12
LED712VMR16V24KFL	7W 12V MR16 - 2400K 40°	12	6.5	50W	450	69.2	40	2400K	80	12
LED712VMR16V27KNFL	7W 12V MR16 - 2700K 20°	12	7	50W	500	71.4	20	2700K	80	12
LED712VMR16V27KFL	7W 12V MR16 - 2700K 40°	12	6.5	50W	500	76.9	40	2700K	80	12
LED712VMR16V30KNFL	7W 12V MR16 - 3000K 20°	12	7	50W	500	71.4	20	3000K	80	12
LED712VMR16V30KFL	7W 12V MR16 - 3000K 40°	12	6.5	50W	500	76.9	40	3000K	80	12
LED712VMR16V41KNFL	7W 12V MR16 - 4100K 20°	12	7	50W	500	71.4	20	4100K	80	12
LED712VMR16V41KFL	7W 12V MR16 - 4100K 40°	12	6.5	50W	500	76.9	40	4100K	80	12
LED712VMR16V50KFL	7W 12V MR16 - 5000K 40°	12	7	50W	500	71.4	40	5000K	80	12

7W DIMMABLE ELITE GU5.3 12V MR16 (50W EQUIVALENT) HIGH CRI CRI>90 R9>50



LED712VMR16927KNFL	7W 12V MR16 - 2700K 20°	12	7	50W	425	60.7	20	2700K	90	12
LED712VMR16927KNFLB	7W 12V MR16 - 2700K 20° - Black	12	7	50W	425	60.7	20	2700K	90	12
LED712VMR16927KFL	7W 12V MR16 - 2700K 40°	12	6.5	50W	425	65.4	40	2700K	90	12
LED712VMR16927KFLB	7W 12V MR16 - 2700K 40° - Black	12	6.5	50W	425	65.4	40	2700K	90	12
LED712VMR16930KNFL	7W 12V MR16 - 3000K 20°	12	7	50W	425	60.7	20	3000K	90	12
LED712VMR16930KFL	7W 12V MR16 - 3000K 40°	12	6.5	50W	425	65.4	40	3000K	90	12
LED712VMR16941KNFL	7W 12V MR16 - 4100K 20°	12	7	50W	425	60.7	20	4100K	90	12
LED712VMR16941KFL	7W 12V MR16 - 4100K 40°	12	6.5	50W	470	72.3	40	4100K	80	12

5W DIMMABLE ELITE VALUE GU5.3 12V MR16 (35W EQUIVALENT)



LED512VMR1627KNFL	5W 12V MR16 - 2700K 20°	12	5	35W	400	80	20	2700K	80	12
LED512VMR1627KFL	5W 12V MR16 - 2700K 40°	12	5	35W	400	80	40	2700K	80	12
LED512VMR1630KNFL	5W 12V MR16 - 3000K 20°	12	5	35W	400	80	20	3000K	80	12
LED512VMR1630KFL	5W 12V MR16 - 3000K 40°	12	5	35W	400	80	40	3000K	80	12
LED512VMR1641KFL	5W 12V MR16 - 4100K 40°	12	5	35W	400	80	40	4100K	80	12

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Bearn Angle	CCT	CRF	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	-------------	-----	-----	---------------

25,000 HOUR ELITE DIMMABLE LED GU10

7W DIMMABLE ELITE GU10 (50W EQUIVALENT)

LED7GU10MR1627KFL	5W GU10 MR16 - 2700K 40°	120	5.5	35W	385	70	-	40	2700K	80	12
LED7GU10MR1630KFL	5W GU10 MR16 - 3000K 40°	120	5.5	35W	385	70	-	40	3000K	80	12
LED7GU10MR1641KFL	5W GU10 MR16 - 4100K 40°	120	5.5	35W	385	70	-	40	4100K	80	12



7W DIMMABLE DESIGNER ELITE GU10 (50W EQUIVALENT)

LED7MR16GU1024KFL	6W GU10 MR16 - 2400K 40°	120	6	50W	450	75	-	40	2400K	80	12
LED7MR16GU1027KNFL	5.5W GU10 MR16 - 2700K 40°	120	5.5	50W	500	90.9	-	20	2700K	80	12
LED7MR16GU1027KFL	6W GU10 MR16 - 2700K 40°	120	6	50W	500	83.3	-	40	2700K	80	12
LED7MR16GU1030KNFL	5.5W GU10 MR16 - 3000K 20°	120	5.5	50W	500	90.9	-	20	3000K	80	12
LED7MR16GU1030KFL	6W GU10 MR16 - 3000K 40°	120	6	50W	500	83.3	-	40	3000K	80	12
LED7MR16GU1041KNFL	7W GU10 MR16 - 4100K 20°	120	5.5	50W	500	90.9	-	20	4100K	80	12
LED7MR16GU1041KFL	7W GU10 MR16 - 4100K 40°	120	6	50W	500	83.3	-	40	4100K	80	12



25,000 HOUR ELITE DIMMABLE LED PAR16

7W DIMMABLE PAR16 (50W EQUIVALENT)

LED7P1624KFL	7W PAR16 - 2400K 40°	120	7	50W	500	71.4	1052	40	2400K	80	12
LED7P1627KNFL	7W PAR16 - 2700K 20°	120	7	50W	500	71.4	3296	20	2700K	80	12
LED7P1627KFL	7W PAR16 - 2700K 40°	120	7	50W	500	71.4	1057	40	2700K	80	12
LED7P1630KNFL	7W PAR16 - 3000K 20°	120	7	50W	500	71.4	3296	20	3000K	80	12
LED7P1630KFL	7W PAR16 - 3000K 40°	120	7	50W	500	71.4	1057	40	3000K	80	12
LED7P1641KNFL	7W PAR16 - 4100K 20°	120	7	50W	500	71.4	3296	20	4100K	80	12
LED7P1641KFL	7W PAR16 - 4100K 40°	120	7	50W	500	71.4	1057	40	4100K	80	12



Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	CCT	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----	-----	-----	---------------

25,000 HOUR DIMMABLE LED G25

DIMMABLE 4W AND 6W G25 FROSTED



LED5G25D27KF	Dimmable 4W G25 - 2700K Frosted	120	4	40W	350	87.5	2700K	80	12
LED5G25D30KF	Dimmable 4W G25 - 3000K Frosted	120	4	40W	350	87.5	3000K	80	12
L6G25D2527KF	Dimmable 6W G25 - 2700K Frosted	120	6	60W	525	87.5	2700K	80	12
L6G25D2530KF	Dimmable 6W G25 - 3000K Frosted	120	6	60W	525	87.5	3000K	80	12

25,000 HOUR NON DIMMABLE LED WET LOCATION S14

NON DIMMABLE 5W WET LOCATION S14



LED5E26S1427K	LED 4W Wet Location S14 - 2700K Clear	120	4	40W	300	75	2700K	80	12
LED5E26S1430K	LED 4W Wet Location S14 - 3000K Clear	120	4	40W	300	75	3000K	80	12
LED5E26S1441K	LED 4W Wet Location S14 - 4100K Clear	120	4	40W	300	75	4100K	80	12
LED5E26S1427KF	LED 4W Wet Location S14 - 2700K Frosted	120	4	40W	300	75	2700K	80	12
LED5E26S1430KF	LED 4W Wet Location S14 - 3000K Frosted	120	4	40W	300	75	3000K	80	12
LED5E26S1441KF	LED 4W Wet Location S14 - 4100K Frosted	120	4	40W	300	75	4100K	80	12

Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing



Consult www.tpci.com for warranty information.

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	CCT (Kelvin)	CRI	Case Quantity	
25,000 HOUR DIMMABLE LED DECO LAMPS										
DIMMABLE 5W DECO LAMPS										
LED5E12G1627K	LED 5W Dim Candelabra G16 Globe - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E26G1627K	LED 5W Dim G16 Globe - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E12G1627KF	LED5W Dim Candelabra Frost G16 Globe - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E26G1627KF	LED5W Dim Frost G16 Globe - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E12B1127K	LED 5W Dim Candelabra Blunt Tip - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E12B1130K	LED 5W Dim Candelabra Blunt Tip - 3000K	120	5	40W	375	75	3000K	80	12	
LED5E12B1150K	LED 5W Dim Candelabra Blunt Tip - 5000K	120	5	40W	375	75	5000K	80	12	
LED5E26B1127K	LED 5W Dim Blunt Tip - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E26B1130K	LED5W Dim Blunt Tip - 3000K	120	5	40W	375	75	3000K	80	12	
LED5E12B1124KF	LED5W Dim Candelabra Frost Blunt Tip - 2400K	120	5	40W	300	60	2400K	80	12	
LED5E12B1127KF	LED5W Dim Candelabra Frost Blunt Tip - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E12B1150KF	LED 5W Dim Candelabra Frost Blunt Tip - 5000K	120	5	40W	375	75	5000K	80	12	
LED5E26B1127KF	LED 5W Dim Frost Blunt Tip - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E12F1127K	LED 5W Dim Candelabra F11 Flame Tip - 2700K	120	5	40W	350	70	2700K	80	12	
LED5E26F1127K	LED 5W Dim F11 Flame Tip - 2700K	120	5	40W	350	70	2700K	80	12	

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	CCT (Kelvin)	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----	--------------	-----	---------------

25,000 HOUR DIMMABLE LED DECO LAMPS (CONTINUED)

DIMMABLE 4W DECO LAMPS



LED4E12G1627K	LED 4W Dim Candelabra G16 Globe - 2700K	120	4	25W	280	70	2700K	80	12
---------------	---	-----	---	-----	-----	----	-------	----	----

LED4E26G1627K	LED 4W Dim G16 Globe - 2700K	120	4	25W	280	70	2700K	80	12
---------------	------------------------------	-----	---	-----	-----	----	-------	----	----



LED4E12G1627KF	LED 4W Dim Candelabra Frost G16 Globe - 2700K	120	4	25W	280	70	2700K	80	12
----------------	---	-----	---	-----	-----	----	-------	----	----

LED4E26G1627KF	LED 4W Dim Frost G16 Globe - 2700K	120	4	25W	280	70	2700K	80	12
----------------	------------------------------------	-----	---	-----	-----	----	-------	----	----



LED4E12B1124K	LED 4W Dim Candelabra Blunt Tip - 2400K	120	4	25W	250	62.5	2400K	80	12
---------------	---	-----	---	-----	-----	------	-------	----	----

LED4E12B1127K	LED 4W Dim Candelabra Blunt Tip - 2700K	120	4	25W	280	70	2700K	80	12
---------------	---	-----	---	-----	-----	----	-------	----	----



LED4E26B1124K	LED 4W Dim Blunt Tip - 2400K	120	4	25W	250	62.5	2400K	80	12
---------------	------------------------------	-----	---	-----	-----	------	-------	----	----

LED4E26B1127K	LED 4W Dim Blunt Tip - 2700K	120	4	25W	280	70	2700K	80	12
---------------	------------------------------	-----	---	-----	-----	----	-------	----	----



LED4E12B1127KF	LED 4W Dim Candelabra Frosted Blunt Tip - 2700K	120	4	25W	280	70	2700K	80	12
----------------	---	-----	---	-----	-----	----	-------	----	----

LED4E26B1127KF	LED 4W Dim Frosted Blunt Tip - 2700K	120	4	25W	280	70	2700K	80	12
----------------	--------------------------------------	-----	---	-----	-----	----	-------	----	----



LED4E12F1127K	LED 4W Dim Candelabra F11 Flame - 2700K	120	4	25W	280	70	2700K	80	12
---------------	---	-----	---	-----	-----	----	-------	----	----

LED4E26F1127K	LED 4W Dim F11 Flame Tip - 2700K	120	4	25W	280	70	2700K	80	12
---------------	----------------------------------	-----	---	-----	-----	----	-------	----	----

Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing

3 YEAR WARRANTY

Consult www.tcp.com for warranty information.

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lamp Lumens	LPW	Color Temperature	Base	CRI	Beam Angle	Power Factor	Case Quantity
-------------	------------------	---------	------------	--------------------	-------------	-----	-------------------	------	-----	------------	--------------	---------------

25,000 HOUR LED 120-277V LAMPS

LED 18W LED Non DIMMABLE A23 125W EQUIVALENT

L125A23N25UNV27K	LED 125W A23 UNV, E26 Base - 2700K	120-277v	18	125	2000	111.1	2700	E26	80	-	≥0.9	48
L125A23N25UNV30K	LED 125W A23 UNV, E26 Base - 3000K	120-277v	18	125	2000	111.1	3000	E26	80	-	≥0.9	48
L125A23N25UNV40K	LED 125W A23 UNV, E26 Base - 4000K	120-277v	18	125	2100	116.7	4000	E26	80	-	≥0.9	48
L125A23N25UNV50K	LED 125W A23 UNV, E26 Base - 5000K	120-277v	18	125	2200	122.2	2700	E26	80	-	≥0.9	48



LED 14W LED Non DIMMABLE A21 100W EQUIVALENT

L100A21N25UNV27K	LED 100W A21 UNV, E26 Base - 2700K	120-277v	14	100	1600	114.3	2700	E26	80	-	≥0.7	48
L100A21N25UNV30K	LED 100W A21 UNV, E26 Base - 3000K	120-277v	14	100	1625	116.1	3000	E26	80	-	≥0.7	48
L100A21N25UNV40K	LED 100W A21 UNV, E26 Base - 4000K	120-277v	14	100	1650	117.9	4000	E26	80	-	≥0.7	48
L100A21N25UNV50K	LED 100W A21 UNV, E26 Base - 5000K	120-277v	14	100	1650	117.9	5000	E26	80	-	≥0.7	48



LED 7.5W LED Non DIMMABLE A19 60W EQUIVALENT

L60A19N25UNV27K	LED 60W A19 UNV, E26 Base - 2700K	120-277v	7.5	60	800	106.7	2700	E26	80	-	≥0.5	48
L60A19N25UNV30K	LED 60W A19 UNV, E26 Base - 3000K	120-277v	7.5	60	800	106.7	3000	E26	80	-	≥0.5	48
L60A19N25UNV40K	LED 60W A19 UNV, E26 Base - 4000K	120-277v	7.5	60	850	113.3	4000	E26	80	-	≥0.5	48
L60A19N25UNV50K	LED 60W A19 UNV, E26 Base - 5000K	120-277v	7.5	60	875	116.7	5000	E26	80	-	≥0.5	48



25,000 HOUR LED 120-277V LAMPS (CONTINUED)

LED 9.5W LED NON DIMMABLE BR30 65W EQUIVALENT



L65BR30N25UNV27K	LED 65W BR30 UNV, E26 Base - 2700K	120-277v	9.5	65	875	92.1	2700	E26	80	-	≥0.7	12
L65BR30N25UNV30K	LED 65W BR30 UNV, E26 Base - 3000K	120-277v	9.5	65	900	94.7	3000	E26	80	-	≥0.7	12
L65BR30N25UNV40K	LED 65W BR30 UNV, E26 Base - 4000K	120-277v	9.5	65	925	97.4	4000	E26	80	-	≥0.7	12
L65BR30N25UNV50K	LED 65W BR30 UNV, E26 Base - 5000K	120-277v	9.5	65	975	102.6	5000	E26	80	-	≥0.7	12

LED 13W LED NON DIMMABLE BR30 100W EQUIVALENT



L100BR30N25UNV27K	LED 100W BR30 UNV, E26 Base - 2700K	120-277v	13	100	1400	107.7	2700	E26	80	-	≥0.7	12
L100BR30N25UNV30K	LED 100W BR30 UNV, E26 Base - 3000K	120-277v	13	100	1450	111.5	3000	E26	80	-	≥0.7	12
L100BR30N25UNV40K	LED 100W BR30 UNV, E26 Base - 4000K	120-277v	13	100	1500	115.4	4000	E26	80	-	≥0.7	12
L100BR30N25UNV50K	LED 100W BR30 UNV, E26 Base - 5000K	120-277v	13	100	1550	119.2	5000	E26	80	-	≥0.7	12

LED 12.5W LED NON DIMMABLE PAR38 120W EQUIVALENT



L100P38N25UNV27KFL	LED 100W PAR38 UNV, E26 Base - 2700K Flood	120-277v	12.5	120	1100	88	2700	E26	80	-	≥0.7	12
L100P38N25UNV30KFL	LED 100W PAR38 UNV, E26 Base - 3000K Flood	120-277v	12.5	120	1100	88	3000	E26	80	-	≥0.7	12
L100P38N25UNV40KFL	LED 100W PAR38 UNV, E26 Base - 4000K Flood	120-277v	12.5	120	1150	92	4000	E26	80	-	≥0.7	12
L100P38N25UNV50KFL	LED 100W PAR38 UNV, E26 Base - 5000K Flood	120-277v	12.5	120	1200	96	5000	E26	80	-	≥0.7	12
L100P38N25UNV27KNFL	LED 100W PAR38 UNV, E26 Base - 2700K Narrow Flood	120-277v	12.5	120	1100	88	2700	E26	80	-	≥0.7	12
L100P38N25UNV30KNFL	LED 100W PAR38 UNV, E26 Base - 3000K Narrow Flood	120-277v	12.5	120	1100	88	3000	E26	80	-	≥0.7	12
L100P38N25UNV40KNFL	LED 100W PAR38 UNV, E26 Base - 4000K Narrow Flood	120-277v	12.5	120	1150	92	4000	E26	80	-	≥0.7	12
L100P38N25UNV50KNFL	LED 100W PAR38 UNV, E26 Base - 5000K Narrow Flood	120-277v	12.5	120	1200	96	5000	E26	80	-	≥0.7	12

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	CCT	Beam Angle	CRI	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----	-----	------------	-----	---------------

25,000 HOUR ALLUSION LED 15W PAR38 WITH SMOOTH WARM DIMMING (REPLACES 90W)

L15P38DNFLA	15W PAR38 Narrow Flood	120	12.5	90W	975	78	3000K to 2000K	25	80	12
L15P38DFLA	15W PAR38 Flood	120	12.5	90W	975	78	3000K to 2000K	40	80	12



25,000 HOUR ALLUSION LED 15W PAR30 WITH SMOOTH WARM DIMMING (REPLACES 90W)

L15P30DNFLA	15W PAR30 Narrow Flood	120	12.5	90W	950	76	3000K to 2000K	25	80	12
L15P30DFLA	15W PAR30 Flood	120	12.5	90W	950	76	3000K to 2000K	40	80	12



25,000 HOUR ALLUSION LED 7W PAR20 WITH SMOOTH WARM DIMMING (REPLACES 50W)

L7P20DNFLA	7W PAR20 Narrow Flood	120	6.5	50W	525	80.8	3000K to 2000K	25	80	12
L7P20DFLA	7W PAR20 Flood	120	6.5	50W	525	80.8	3000K to 2000K	40	80	12



25,000 HOUR ALLUSION LED 7W MR16 WITH SMOOTH WARM DIMMING (REPLACES 50W)

L712VMR16DNFLA	7W MR16 Narrow Flood	120	6	50W	350	58.3	3000K to 1800K	20	80	12
----------------	----------------------	-----	---	-----	-----	------	----------------	----	----	----



30,000 HOUR ALLUSION LED 13W SL16 WITH SMOOTH WARM DIMMING

L15SL16D30A	13W SL16	120	13	-	1200	92.3	3000K to 2000K	110	80	6
-------------	----------	-----	----	---	------	------	----------------	-----	----	---



25,000 HOUR ALLUSION LED 10W 5/6" RECESSED DOWNLIGHTS WITH SMOOTH WARM DIMMING

LED10DR56DA	10W 5/6" Recessed Downlight	120	11	65W	1100	100	3000K to 2000K	120	80	6
-------------	-----------------------------	-----	----	-----	------	-----	----------------	-----	----	---



25,000 HOUR ALLUSION LED 10W BR30 WITH SMOOTH WARM DIMMING (REPLACES 65W)

LED10BR30DA	10W BR30	120	10	65W	675	67.5	3000K to 2000K	110	80	12
-------------	----------	-----	----	-----	-----	------	----------------	-----	----	----



25,000 HOUR ALLUSION LED 9W A LAMPS WITH SMOOTH WARM DIMMING

LED9A19DA	9W A19 A-Lamp	120	9	60W	650	72.2	2700K to 2000K	-	80	12
-----------	---------------	-----	---	-----	-----	------	----------------	---	----	----



25,000 HOUR ALLUSION LED 5W B11 DECO WITH SMOOTH WARM DIMMING

LED5E12B11DA	5W B11 Candelabra Blunt Tip	120	5	25W	300	60	2400K to 1900K	-	82	12
LED5E12B11DAF	5W B11 Candelabra Blunt Tip, Frosted	120	5	25W	300	60	2400K to 1900K	-	82	12



Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Base	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	------------	-----	-----	------	---------------

15,000 HOUR PRO DIMMABLE LED PARS

13W DIMMABLE PRO LINE PAR38 (REPLACES 90W)



L90P38D15V30KFL	13W Dimmable PAR38 - 3000K 40° Pro	120	13	90W	1100	84.6	-	40	3000K	80	E26	12
-----------------	------------------------------------	-----	----	-----	------	------	---	----	-------	----	-----	----

13W DIMMABLE PRO LINE PAR38 2 PACK (REPLACES 90W)

L90P38D15V30KFL2	13W Dimmable PAR38 - 3000K 40° Pro 2 Pack	120	13	90W	1100	84.6	-	40	3000K	80	E26	12
L90P38D15V41KFL2	13W Dimmable PAR38 - 4100K 40° Pro 2 Pack	120	13	90W	1100	84.6	-	40	4100K	80	E26	12
L90P38D15V50KFL2	13W Dimmable PAR38 - 5000K 40° Pro 2 Pack	120	13	90W	1100	84.6	-	40	5000K	80	E26	12

9W DIMMABLE PRO LINE PAR30 (REPLACES 75W)



L75P30D15V30KFL	LED 9W Dimmable PAR30 - 3000K 40° Pro	120	9	75W	720	80	-	40	3000K	80	E26	12
-----------------	---------------------------------------	-----	---	-----	-----	----	---	----	-------	----	-----	----

7W DIMMABLE PRO LINE PAR20 (REPLACES 50W)



L50P20D15V30KFL	LED 7W Dimmable PAR20 - 3000K 40° Pro	120	7	50W	525	75	-	40	3000K	80	E26	12
-----------------	---------------------------------------	-----	---	-----	-----	----	---	----	-------	----	-----	----

15,000 HOUR PRO DIMMABLE LED BRS

14W DIMMABLE PRO LINE BR40 (REPLACES 75W)



L75BR40D15V27K	LED 14W Dimmable BR40 - 2700K Pro	120	14	75W	1065	76.1	110	-	2700K	80	E26	12
----------------	-----------------------------------	-----	----	-----	------	------	-----	---	-------	----	-----	----

9W DIMMABLE PRO LINE BR30 (REPLACES 65W)



L65BR30D15V27K	LED 9W Dimmable BR30 - 2700K Pro	120	9	65W	650	72.2	110	-	2700K	80	E26	12
----------------	----------------------------------	-----	---	-----	-----	------	-----	---	-------	----	-----	----

7.5W DIMMABLE PRO LINE R20 (REPLACES 50W)



L50R20D15V27K	LED 7W Dimmable R20 - 2700K Pro	120	7.5	50W	500	66.7	110	-	2700K	80	E26	12
---------------	---------------------------------	-----	-----	-----	-----	------	-----	---	-------	----	-----	----



Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CBCP	Beam Angle	CCT	CRI	Base	Case Quantity
-------------	------------------	---------	------------	--------------------	--------	-----------------	------	------------	-----	-----	------	---------------

15,000 HOUR PRO DIMMABLE LED ALL GLASS DECORATIVE
4W DIMMABLE PRO LINE G25 (REPLACES 40W)

FG25D40V27W	LED 4W Dimmable G25 - 2700K Frosted Pro	120	4	40W	350	87.5	-	-	2700K	80	E26	12
-------------	---	-----	---	-----	-----	------	---	---	-------	----	-----	----



4W DIMMABLE PRO LINE B11 (REPLACES 40W)

FB11D40V27E12C	LED 4W Dimmable B11 - 2700K Frosted Pro	120	4	40W	350	87.5	-	-	2700K	80	E12	12
FB11D40V50E12C	LED 4W Dimmable B11 - 5000K Frosted Pro	120	4	40W	350	87.5	-	-	5000K	80	E12	12



15,000 HOUR LED ALL GLASS A19 - PROLINE
DIMMABLE 8W ALL GLASS A19 - PROLINE

LFF60A19D1527K	LED 8W Dimmable A19 - 2700K Frosted Pro	120	8	60W	725	90.6	-	-	2700K	80	E26	12
LFF60A19D1550K	LED 8W Dimmable A19 - 5000K Frosted Pro	120	8	60W	725	90.6	-	-	5000K	80	E26	12
LFC60A19D1527K	LED 8W Dimmable A19 - 2700K Clear Pro	120	8	60W	725	90.6	-	-	2700K	80	E26	12



NON DIMMABLE 8W ALL GLASS A19 - PROLINE

LFF60A19N1527K	LED 8W Non Dimmable A19 - 2700K Frosted Pro	120	8	60W	725	90.6	-	-	2700K	80	E26	12
LFF60A19N1550K	LED 8W Non Dimmable A19 - 5000K Frosted Pro	120	8	60W	725	90.6	-	-	5000K	80	E26	12
LFC60A19N1527K	LED 8W Non Dimmable A19 - 2700K Clear Pro	120	8	60W	725	90.6	-	-	2700K	80	E26	12
LFC60A19N1550K	LED 8W Non Dimmable A19 - 5000K Clear Pro	120	8	60W	725	90.6	-	-	5000K	80	E26	12



DIMMABLE 4.5W ALL GLASS A19 - PROLINE

LFF40A19D1527K	LED 4.5W Dimmable A19 - 2700K Frosted Pro	120	4.5	40W	425	94.4	-	-	2700K	80	E26	12
LFC40A19D1527K	LED 4.5W Dimmable A19 - 2700K Clear Pro	120	4.5	40W	425	94.4	-	-	2700K	80	E26	12

NON DIMMABLE 5W ALL GLASS A19 - PROLINE

LFF40A19N1527K	LED 4.5W Non Dimmable A19 - 2700K Frosted Pro	120	5	40W	425	94.4	-	-	2700K	80	E26	12
LFF40A19N1550K	LED 4.5W Non Dimmable A19 - 5000K Frosted Pro	120	5	40W	425	94.4	-	-	5000K	80	E26	12
LFC40A19N1527K	LED 4.5W Non Dimmable A19 - 2700K Clear Pro	120	5	40W	425	94.4	-	-	2700K	80	E26	12
LFC40A19N1550K	LED 4.5W Non Dimmable A19 - 5000K Clear Pro	120	5	40W	425	94.4	-	-	5000K	80	E26	12

15,000 HOUR PRO LINE A-LAMPS
15W A19 ProLINE DIMMABLE A-LAMP (REPLACES 100W)

L100A19D15V27K	Dimmable 15W A19 - 2700K Pro	120	15	100W	1500	100	-	-	2700K	80	E26	12
----------------	------------------------------	-----	----	------	------	-----	---	---	-------	----	-----	----

14W A19 ProLINE NON DIMMABLE A-LAMP (REPLACES 100W)

L100A19N15V27K	Non Dimmable 15W A19 - 2700K Pro	120	14	100W	1500	107.1	-	-	2700K	80	E26	12
----------------	----------------------------------	-----	----	------	------	-------	---	---	-------	----	-----	----



9W A19 ProLINE DIMMABLE A-LAMP (REPLACES 60W)

L60A19D15V27K	Dimmable 9W A19 - 2700K Pro	120	9	60W	800	88.9	-	-	2700K	80	E26	12
---------------	-----------------------------	-----	---	-----	-----	------	---	---	-------	----	-----	----

9W A19 ProLINE NON DIMMABLE A-LAMP (REPLACES 60W)

L60A19N15V27K	Non Dimmable 9W A19 - 2700K Pro	120	9	60W	800	88.9	-	-	2700K	80	E26	12
---------------	---------------------------------	-----	---	-----	-----	------	---	---	-------	----	-----	----

Item Number	Item Description	Voltage	Lamp Watts	Avg. System Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Base Type	Case Quantity
-------------	------------------	---------	------------	-------------------	--------------------	--------	-----------------	-----	-----	-----------	---------------

50,000 HOUR DIMMABLE LED PL TYPE A LAMPS

9W DIMMABLE VERTICAL BR30 PL LAMP



L9PLVD5027K	9W Dimmable Vertical BR30 PL - 2700K	120-277v, 347v	9	13.1	13-18	1050	116.7	2700K	80	G24q / GX24q	12
L9PLVD5030K	9W Dimmable Vertical BR30 PL - 3000K	120-277v, 347v	9	13.1	13-18	1100	122.2	3000K	80	G24q / GX24q	12
L9PLVD5041K	9W Dimmable Vertical BR30 PL - 4100K	120-277v, 347v	9	13.1	13-18	1150	127.8	4100K	80	G24q / GX24q	12
L9PLVD5050K	9W Dimmable Vertical BR30 PL - 5000K	120-277v, 347v	9	13.1	13-18	1175	130.6	5000K	80	G24q / GX24q	12

17W DIMMABLE VERTICAL BR30 PL LAMP



L17PLVD5027K	17W Dimmable Vertical BR30 PL - 2700K	120-277v, 347v	17	21.4	26	1700	100.0	2700K	80	G24q / GX24q	12
L17PLVD5030K	17W Dimmable Vertical BR30 PL - 3000K	120-277v, 347v	17	21.4	26	1800	105.8	3000K	80	G24q / GX24q	12
L17PLVD5041K	17W Dimmable Vertical BR30 PL - 4100K	120-277v, 347v	17	21.4	26	1900	111.7	4100K	80	G24q / GX24q	12
L17PLVD5050K	17W Dimmable Vertical BR30 PL - 5000K	120-277v, 347v	17	21.4	26	1950	114.7	5000K	80	G24q / GX24q	12

19W DIMMABLE VERTICAL BR40 PL LAMP



L19PLVD5027K	19W Dimmable Vertical BR40 PL - 2700K	120-277v, 347v	19	25.6	26-42	2350	123.7	2700K	80	G24q / GX24q	12
L19PLVD5030K	19W Dimmable Vertical BR40 PL - 4000K	120-277v, 347v	19	25.6	26-42	2400	126.3	3000K	80	G24q / GX24q	12
L19PLVD5041K	19W Dimmable Vertical BR40 PL - 4100K	120-277v, 347v	19	25.6	26-42	2450	128.9	4100K	80	G24q / GX24q	12
L19PLVD5050K	19W Dimmable Vertical BR40 PL - 5000K	120-277v, 347v	19	25.6	26-42	2480	130.5	5000K	80	G24q / GX24q	12

Item Number	Item Description	Voltage	Lamp Watts	Avg. System Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Base Type	Case Quantity
-------------	------------------	---------	------------	-------------------	--------------------	--------	-----------------	-----	-----	-----------	---------------

20,000 HOUR NON DIMMABLE LED PL LAMPS

11W Non DIMMABLE QUAD PL LAMP

LPL226A2527K	11W Non Dimmable Universal Quad PL - 2700K	120-277V	11	13.7	13-18-26	950	86.4	2700K	80	G24q / GX24q	12
LPL226A2530K	11W Non Dimmable Universal Quad PL - 3000K	120-277V	11	13.7	13-18-26	950	86.4	3000K	80	G24q / GX24q	12
LPL226A2535K	11W Non Dimmable Universal Quad PL - 3500K	120-277V	11	13.7	13-18-26	950	86.4	3500K	80	G24q / GX24q	12
LPL226A2541K	11W Non Dimmable Universal Quad PL - 4100K	120-277V	11	13.7	13-18-26	950	86.4	4100K	80	G24q / GX24q	12
LPL226A2550K	11W Non Dimmable Universal Quad PL - 5000K	120-277V	11	13.7	13-18-26	950	86.4	5000K	80	G24q / GX24q	12



20,000 HOUR NON DIMMABLE LED PL 3U LAMPS

15W Non DIMMABLE PL 3U LAMP

LPLU26A2527K	15W Non Dimmable Universal 3U PL - 2700K	120-277V	15	-	18-26	1350	90	2700K	80	G24q / GX24q	12
LPLU26A2530K	15W Non Dimmable Universal 3U PL - 3000K	120-277V	15	-	18-26	1350	90	3000K	80	G24q / GX24q	12
LPLU26A2535K	15W Non Dimmable Universal 3U PL - 3500K	120-277V	15	-	18-26	1350	90	3500K	80	G24q / GX24q	12
LPLU26A2541K	15W Non Dimmable Universal 3U PL - 4100K	120-277V	15	-	18-26	1350	90	4100K	80	G24q / GX24q	12
LPLU26A2550K	15W Non Dimmable Universal 3U PL - 5000K	120-277V	15	-	18-26	1350	90	5000K	80	G24q / GX24q	12



16W Non DIMMABLE PL 3U LAMP

LPLU42A2527K	16W Non Dimmable Universal 3U PL - 2700K	120-277V	16	-	32-42	1500	93.8	2700K	80	G24q / GX24q	12
LPLU42A2530K	16W Non Dimmable Universal 3U PL - 3000K	120-277V	16	-	32-42	1500	93.8	3000K	80	G24q / GX24q	12
LPLU42A2535K	16W Non Dimmable Universal 3U PL - 3500K	120-277V	16	-	32-42	1500	93.8	3500K	80	G24q / GX24q	12
LPLU42A2541K	16W Non Dimmable Universal 3U PL - 4100K	120-277V	16	-	32-42	1500	93.8	4100K	80	G24q / GX24q	12
LPLU42A2550K	16W Non Dimmable Universal 3U PL - 5000K	120-277V	16	-	32-42	1500	93.8	5000K	80	G24q / GX24q	12



Item Number	Item Description	Voltage	Lamp Watts	Avg. System Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Base Type	Case Quantity
-------------	------------------	---------	------------	-------------------	--------------------	--------	-----------------	-----	-----	-----------	---------------

50,000 HOUR NON DIMMABLE LED PLL LAMPS

17W Non DIMMABLE PLL LAMP



LPLLU40A5027K	17W Non Dimmable PLL - 2700K	120-277V	17	-	40	2000	90.5	2700K	80	2G11	12
LPLLU40A5030K	17W Non Dimmable PLL - 3000K	120-277V	17	-	40	2000	90.5	3000K	80	2G11	12
LPLLU40A5035K	17W Non Dimmable PLL - 3500K	120-277V	17	-	40	2000	90.5	3500K	80	2G11	12
LPLLU40A5041K	17W Non Dimmable PLL - 4100K	120-277V	17	-	40	2100	90.5	4100K	80	2G11	12
LPLLU40A5050K	17W Non Dimmable PLL - 5000K	120-277V	17	-	40	2150	90.5	5000K	80	2G11	12

50,000 HOUR DIMMABLE LED ROTATING HORIZONTAL SHAPE LAMPS

19W DIMMABLE ROTATING HORIZONTAL PL LAMP



LPLH42A5027K	19W Dimmable Rotating Horizontal PL - 2700K	120-277V	19	-	32-42	1900	100	2700K	80	G24q / GX24q	12
LPLH42A5030K	19W Dimmable Rotating Horizontal PL - 3000K	120-277V	19	-	32-42	2000	105.3	3000K	80	G24q / GX24q	12
LPLH42A5035K	19W Dimmable Rotating Horizontal PL - 3500K	120-277V	19	-	32-42	2000	105.3	3500K	80	G24q / GX24q	12
LPLH42A5041K	19W Dimmable Rotating Horizontal PL - 4100K	120-277V	19	-	32-42	2000	105.3	4100K	80	G24q / GX24q	12
LPLH42A5050K	19W Dimmable Rotating Horizontal PL - 5000K	120-277V	19	-	32-42	2000	105.3	5000K	80	G24q / GX24q	12

25,000 HOUR NON-DIMMABLE LED PL TYPE B LAMPS

5W Non DIMMABLE PL 1U LAMP



LPLU09B2527K	LED 5W 1U B 27K	120-277	5	-	5-7-9	500	100	2700K	80	GX23	12
LPLU09B2530K	LED 5W 1U B 30K	120-277	5	-	5-7-9	550	110	3000K	80	GX23	12
LPLU09B2535K	LED 5W 1U B 35K	120-277	5	-	5-7-9	550	110	3500K	80	GX23	12
LPLU09B2541K	LED 5W 1U B 41K	120-277	5	-	5-7-9	550	110	4100K	80	GX23	12
LPLU09B2550K	LED 5W 1U B 50K	120-277	5	-	5-7-9	550	110	5000K	80	GX23	12

7W Non DIMMABLE PL 1U LAMP

LPLU13B2527K	LED 7W 1U B 27K	120-277	7	-	9-13	700	100	2700K	80	GX23	12
LPLU13B2530K	LED 7W 1U B 30K	120-277	7	-	9-13	750	107.1	3000K	80	GX23	12
LPLU13B2535K	LED 7W 1U B 35K	120-277	7	-	9-13	750	107.1	3500K	80	GX23	12
LPLU13B2541K	LED 7W 1U B 41K	120-277	7	-	9-13	750	107.1	4100K	80	GX23	12
LPLU13B2550K	LED 7W 1U B 50K	120-277	7	-	9-13	750	107.1	5000K	80	GX23	12

20,000 HOUR NON DIMMABLE LED PL 2U LAMPS

10W Non DIMMABLE PL 2U LAMP



LPL218B2527K	10W Non Dimmable Universal 2U PL - 2700K	120-277V	8	-	13-18-26	975	121.9	2700K	80	G24d / GX24d G24q / GX24q	12
LPL218B2530K	10W Non Dimmable Universal 2U PL - 3000K	120-277V	8	-	13-18-26	1000	125	3000K	80	G24d / GX24d G24q / GX24q	12
LPL218B2535K	10W Non Dimmable Universal 2U PL - 3500K	120-277V	8	-	13-18-26	1025	128.1	3500K	80	G24d / GX24d G24q / GX24q	12
LPL218B2541K	10W Non Dimmable Universal 2U PL - 4100K	120-277V	8	-	13-18-26	1050	131.3	4100K	80	G24d / GX24d G24q / GX24q	12
LPL218B2550K	10W Non Dimmable Universal 2U PL - 5000K	120-277V	8	-	13-18-26	1050	131.3	5000K	80	G24d / GX24d G24q / GX24q	12

Item Number	Item Description	Voltage	Lamp Watts	Avg. System Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Base Type	Case Quantity
25,000 HOUR NON-DIMMABLE LED PL TYPE B LAMPS											
13W Non Dimmable PL 3U Lamp											
LPLU42B2527K	LED 13W 3U B 27K	120-277	13	-	32-42	1400	107.7	2700K	80	G24d / GX24d G24q / GX24q	12
LPLU42B2530K	LED 13W 3U B 30K	120-277	13	-	32-42	1500	115.4	3000K	80	G24d / GX24d G24q / GX24q	12
LPLU42B2535K	LED 13W 3U B 35K	120-277	13	-	32-42	1500	115.4	3500K	80	G24d / GX24d G24q / GX24q	12
LPLU42B2541K	LED 13W 3U B 41K	120-277	13	-	32-42	1600	123.1	4100K	80	G24d / GX24d G24q / GX24q	12
LPLU42B2550K	LED 13W 3U B 50K	120-277	13	-	32-42	1600	123.1	5000K	80	G24d / GX24d G24q / GX24q	12
9W Non Dimmable Horizontal PL Lamp											
LPLH26B5027K	LED 9W Horizontal B 27K	120-277	9	-	18-26	1100	122.2	2700K	80	G24d / GX24d G24q / GX24q	12
LPLH26B5030K	LED 9W Horizontal B 30K	120-277	9	-	18-26	1100	122.2	3000K	80	G24d / GX24d G24q / GX24q	12
LPLH26B5035K	LED 9W Horizontal B 35K	120-277	9	-	18-26	1100	122.2	3500K	80	G24d / GX24d G24q / GX24q	12
LPLH26B5041K	LED 9W Horizontal B 41K	120-277	9	-	18-26	1100	122.2	4100K	80	G24d / GX24d G24q / GX24q	12
LPLH26B5050K	LED 9W Horizontal B 50K	120-277	9	-	18-26	1100	122.2	5000K	80	G24d / GX24d G24q / GX24q	12
9W Non Dimmable Vertical BR30 PL Lamp											
LPLV26B5027K	LED 9W Vertical BR30 B 27K	120-277	9	-	18-26	1100	122.2	2700K	80	G24d / GX24d G24q / GX24q	12
LPLV26B5030K	LED 9W Vertical BR30 B 30K	120-277	9	-	18-26	1100	122.2	3000K	80	G24d / GX24d G24q / GX24q	12
LPLV26B5035K	LED 9W Vertical BR30 B 35K	120-277	9	-	18-26	1100	122.2	3500K	80	G24d / GX24d G24q / GX24q	12
LPLV26B5041K	LED 9W Vertical BR30 B 41K	120-277	9	-	18-26	1100	122.2	4100K	80	G24d / GX24d G24q / GX24q	12
LPLV26B5050K	LED 9W Vertical BR30 B 50K	120-277	9	-	18-26	1100	122.2	5000K	80	G24d / GX24d G24q / GX24q	12
17.5W Non Dimmable PLL Type B Lamp											
LPLL40B5027K	17W Non Dimmable PLL40 B - 2700K	120-277V	17.5	-	40	2050	117.1	2700K	80	2G11	12
LPLL40B5030K	17W Non Dimmable PLL40 B - 3000K	120-277V	17.5	-	40	2050	117.1	3000K	80	2G11	12
LPLL40B5035K	17W Non Dimmable PLL40 B - 3500K	120-277V	17.5	-	40	2000	114.3	3500K	80	2G11	12
LPLL40B5041K	17W Non Dimmable PLL40 B - 4100K	120-277V	17.5	-	40	2100	120	4100K	80	2G11	12
LPLL40B5050K	17W Non Dimmable PLL40 B - 5000K	120-277V	17.5	-	40	2150	122.9	5000K	80	2G11	12
50,000 HOUR DIMMABLE LED ADJUSTABLE SHAPE PL TYPE AB LAMPS											
21W Dimmable Adjustable Shape PL Type AB Lamp											
LAPL42AB5027K	21W Dimmable Adjustable Shape PL - 2700K	120v	A=21, B=19	-	32-42	A=1800, B=2100	A=56.3, B=50	2700K	80	G24q / GX24q	12
LAPL42AB5030K	21W Dimmable Adjustable Shape PL - 3000K	120v	A=21, B=19	-	32-42	A=1900, B=2200	A=59.4, B=52.4	3000K	80	G24q / GX24q	12
LAPL42AB5035K	21W Dimmable Adjustable Shape PL - 3500K	120v	A=21, B=19	-	32-42	A=1925, B=2200	A=60.2, B=52.4	3500K	80	G24q / GX24q	12
LAPL42AB5041K	21W Dimmable Adjustable Shape PL - 4100K	120v	A=21, B=19	-	32-42	A=1925, B=2200	A=60.2, B=52.4	4100K	80	G24q / GX24q	12
LAPL42AB5050K	21W Dimmable Adjustable Shape PL - 5000K	120v	A=21, B=19	-	32-42	A=1925, B=2200	A=60.2, B=52.4	5000K	80	G24q / GX24q	12



Item Number	Item Description	Voltage	Lamp Watts	Avg. System Watts	Wattage Equivalent	Lumens	Lumens Per Watt	CCT	CRI	Base Type	Case Quantity
-------------	------------------	---------	------------	-------------------	--------------------	--------	-----------------	-----	-----	-----------	---------------

25,000 HOUR NON-DIMMABLE LED PL LAMPS GU24 BASE

11W NON DIMMABLE PL GU24 BASE LAMP











LPL75GUD2527K	11W Non Dimmable GU24 Based PL - 2700K	120v	11	-	75	1100	100	2700K	80	GU24	12
LPL75GUD2530K	11W Non Dimmable GU24 Based PL - 3000K	120v	11	-	75	1150	104.5	3000K	80	GU24	12
LPL75GUD2535K	11W Non Dimmable GU24 Based PL - 3500K	120v	11	-	75	1200	109.1	3500K	80	GU24	12
LPL75GUD2541K	11W Non Dimmable GU24 Based PL - 4100K	120v	11	-	75	1200	109.1	4100K	80	GU24	12
LPL75GUD2550K	11W Non Dimmable GU24 Based PL - 5000K	120v	11	-	75	1200	109.1	5000K	80	GU24	12

13W NON DIMMABLE PL GU24 BASE LAMP



LPL100GUD2527K	13W Non Dimmable GU24 Based PL - 2700K	120v	13	-	100	1450	111.5	2700K	80	GU24	12
LPL100GUD2530K	13W Non Dimmable GU24 Based PL - 3000K	120v	13	-	100	1500	115.4	3000K	80	GU24	12
LPL100GUD2535K	13W Non Dimmable GU24 Based PL - 3500K	120v	13	-	100	1500	115.4	3500K	80	GU24	12
LPL100GUD2541K	13W Non Dimmable GU24 Based PL - 4100K	120v	13	-	100	1550	119.2	4100K	80	GU24	12
LPL100GUD2550K	13W Non Dimmable GU24 Based PL - 5000K	120v	13	-	100	1600	123.1	5000K	80	GU24	12

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lumens	LPW	CCT	CRI	Base	Case Quantity	
25,000 HOUR DIMMABLE LED ACCENT LIGHTS											
DIMMABLE 2W CLEAR G9 ACCENT LIGHT											
L2G9D2527K	LED Dimmable 2.5W Clear G9 - 2700K	120	2.5	15W	200	80	2700K	90	G9	20	
L2G9D2530K	LED Dimmable 2.5W Clear G9 - 3000K	120	2.5	15W	200	80	3000K	90	G9	20	
DIMMABLE 3W CLEAR G9 ACCENT LIGHT											
L3G9D2527K	LED Dimmable 3W Clear G9 - 2700K	120	3	25W	240	80	2700K	90	G9	20	
L3G9D2530K	LED Dimmable 3W Clear G9 - 3000K	120	3	25W	240	80	3000K	90	G9	20	
DIMMABLE 4W CLEAR G9 ACCENT LIGHT											
L4G9D2527K	LED Dimmable 4W Clear G9 - 2700K	120	4	30W	360	80	2700K	90	G9	20	
L4G9D2530K	LED Dimmable 4W Clear G9 - 3000K	120	4	30W	360	80	3000K	90	G9	20	
DIMMABLE 5W CLEAR G9 ACCENT LIGHT											
L5G9D2527K	LED Dimmable 5W Clear G9 - 2700K	120	5	35W	400	80	2700K	90	G9	20	
L5G9D2530K	LED Dimmable 5W Clear G9 - 3000K	120	5	35W	400	80	3000K	90	G9	20	
DIMMABLE 3W FROSTED G9 ACCENT LIGHT											
L3E12D2527KF	LED Dimmable 3W Frosted E12 - 2700K	120	3	25W	270	90	2700K	90	E12	20	
25,000 HOUR DIMMABLE LED ACCENT LIGHTS											
NON DIMMABLE 1.5W G4 BASE											
L1T3N1030K2	Non Dimmable 1.5W G4 - 3000K - 2 Pack	12	1.5	10W	120	80	3000K	80	G4	25	
25,000 HOUR LED ELEVATOR LAMPS (NON-DIMMABLE)											
LED2W1383V2	LED 2W 1383 Frosted Elevator Lamp - 2700K	12	2	20W	150	75	2700K	80	BA15S	12	
LED2WGBFV2	LED 2W GBF Frosted Elevator Lamp - 2700K	12	2	20W	150	75	2700K	80	BA15D	12	



STARLIGHT SERIES LAMPS

No matter what application you need – commercial, residential, retail or industrial – TCP’s Starlight LED Lamps – give you a unique shape and sleek low profile, combined with a pop of unexpected color, and smooth, warm dimming.

Our Starlight line-up comes in red, black, green, blue and white, with matching pendant mounts available. They are available in a six-inch adjustable length, which mounts directly to a junction box.

Item Number	Item Description	Voltage	Lamp Watts	Wattage Equivalent	Lamp Lumens	LPW	Color Temperature	CRI	Beam Angle	Base	Case Quantity
-------------	------------------	---------	------------	--------------------	-------------	-----	-------------------	-----	------------	------	---------------

30,000 HOUR STARLIGHT SERIES LED LAMPS
9W SL13 STARLIGHT, 65W EQUIVALENT

L9SL13D3030K	LED 9W Dimmable - 30K	120V	9	65	950	105.6	3000	80	110°	E26	12
L9SL13D3040K	LED 9W Dimmable - 40K	120V	9	65	1000	111.1	4000	80	110°	E26	12
L9SL13D3050K	LED 9W Dimmable - 50K	120V	9	65	1000	111.1	5000	80	110°	E26	12



15W SL16 STARLIGHT, 100W EQUIVALENT

L15SL16D3030K	LED 15W Dimmable - 30K	120V	15	100	1625	108.3	3000	80	110°	E26	12
L15SL16D3040K	LED 15W Dimmable - 40K	120V	15	100	1625	108.3	4000	80	110°	E26	12
L15SL16D3050K	LED 15W Dimmable - 50K	120V	15	100	1625	108.3	5000	80	110°	E26	12



19W SL19 STARLIGHT, 140W EQUIVALENT

L19SL19D3030K	LED 19W Dimmable - 30K	120V	19	140	2100	110.5	3000	80	110°	E26	12
L19SL19D3040K	LED 19W Dimmable - 40K	120V	19	140	2250	118.4	4000	80	110°	E26	12
L19SL19D3050K	LED 19W Dimmable - 50K	120V	19	140	2250	118.4	5000	80	110°	E26	12



22W SL22 STARLIGHT, 140W EQUIVALENT

L22SL22D3030K	LED 22W Dimmable - 30K	120V	22	160	2350	106.8	3000	80	110°	E26	12
L22SL22D3040K	LED 22W Dimmable - 40K	120V	22	160	2450	111.4	4000	80	110°	E26	12
L22SL22D3050K	LED 22W Dimmable - 50K	120V	22	160	2450	111.4	5000	80	110°	E26	12



25W SL122 STARLIGHT, 200W EQUIVALENT

L25SL22HD3030K	LED 25W Dimmable - 30K HL	120V	25	200	3100	124	3000	80	110°	E26	12
L25SL22HD3040K	LED 25W Dimmable - 40K HL	120V	25	200	3100	124	4000	80	110°	E26	12



Black, silver and custom colors are available by special order. All models are available in the following colors. To order, add the color code to the end of the model number (i.e., L15SL16D3030KRED)

B	Black
RED	Red
GRN	Green
BLU	Blue

Matching Pendant Mounts are also available:

555PMB	Pendant Mount Black
555PMWHT	Pendant Mount White
555PMRED	Pendant Mount Red
555PMGRN	Pendant Mount Green
555PMBLU	Pendant Mount Blue





TCP's LED HID T-Shape Series are directional and deliver maximum lumens on the floor. Our corn cob Lamps and sensors are an excellent choice for replacing traditional metal halide products. Our high bay retrofit lamps and sensors are energy efficient, feature an isolated driver for better heat dissipation, eliminating the need for a ballast, and all wattages have 4KV surge protection.

LED HID LAMPS



Item Number	Item Description	Voltage	Lamp Watts	Metal Halide Comparison	Lamp Lumens	LPW	Color Temperature	Base	CRI	Case Quantity	3 in 1 Dimming/Sensor
50,000 HOUR LED HID REPLACEMENT LAMPS											
LED 20W METAL HALIDE REPLACEMENT LAMP, E26 BASE											
LHID07040	LED 20W 40K HID Replacement Lamp, E26 Base	120-277v	20	100	3000	150	4000	E26	80	6	-
LHID07050	LED 20W 50K HID Replacement Lamp, E26 Base	120-277v	20	100	3000	150	5000	E26	80	6	-
LED 25W METAL HALIDE REPLACEMENT LAMP, E26 BASE											
LHID10040	LED 25W 40K HID Replacement Lamp, E26 Base	120-277v	25	150	3750	150	4000	E26	80	6	-
LHID10050	LED 25W 50K HID Replacement Lamp, E26 Base	120-277v	25	150	3750	150	5000	E26	80	6	-
LED 40W METAL HALIDE REPLACEMENT LAMP, E26 BASE											
LHID15040	LED 40W 40K HID Replacement Lamp, E26 Base	120-277v	40	175	5850	146.3	4000	E26	80	6	-
LHID15050	LED 40W 50K HID Replacement Lamp, E26 Base	120-277v	40	175	5850	146.3	5000	E26	80	6	-
LED 65W METAL HALIDE REPLACEMENT LAMP, EX39 BASE											
LHID17540	LED 65W 40K HID Replacement Lamp, EX39 Base	120-277v	65	250	9900	152.3	4000	EX39	80	6	-
LHID17550	LED 65W 50K HID Replacement Lamp, EX39 Base	120-277v	65	250	9900	152.3	5000	EX39	80	6	-
LED 90W METAL HALIDE REPLACEMENT LAMP, EX39 BASE											
LHID25040	LED 90W 40K HID Replacement Lamp, EX39 Base	120-277v	90	400	13600	151.1	4000	EX39	80	6	-
LHID25050	LED 90W 50K HID Replacement Lamp, EX39 Base	120-277v	90	400	13600	151.1	5000	EX39	80	6	-



Item Number	Item Description	Voltage	Lamp Watts	Metal Halide Comparison	Lamp Lumens	LPW	Color Temperature	Base	CRI	Case Quantity	3 in 1 Dimming/Sensor
-------------	------------------	---------	------------	-------------------------	-------------	-----	-------------------	------	-----	---------------	-----------------------

50,000 HOUR LED HID REPLACEMENT LAMPS (cont)

LED 60W METAL HALIDE REPLACEMENT LAMP, E26 BASE



L60HBE265040K	LED 60W 40K HID Replacement Lamp, E26 Base	100-277v	60	200	8100	135	4000	E26	80	6	-
L60HBE265050K	LED 60W 50K HID Replacement Lamp, E26 Base	100-277v	60	200	8100	135	5000	E26	80	6	-

LED 80W METAL HALIDE REPLACEMENT LAMP, EX39 BASE



L80HBEX395040K	LED 80W 40K HID Replacement Lamp, EX39 Base	100-277v	80	250	10800	135	4000	EX39	80	6	-
L80HBEX395050K	LED 80W 50K HID Replacement Lamp, EX39 Base	100-277v	80	250	10800	135	5000	EX39	80	6	-

LED 115W METAL HALIDE REPLACEMENT LAMP, EX39 BASE



L115HBEX395040K	LED 115W 40K HID Replacement Lamp, EX39 Base	100-277v	115	400	15525	135	4000	EX39	80	6	-
L115HBEX395050K	LED 115W 50K HID Replacement Lamp, EX39 Base	100-277v	115	400	15525	135	5000	EX39	80	6	-

50,000 HOUR LED HID REPLACEMENT AREA LAMPS

LED 100W METAL HALIDE REPLACEMENT AREA LAMP, E26 BASE



L20ARE26U40K	LED 20W 40K HID100 Replacement Lamp, E26 Base	100-277v	20	100	3000	150	4000	E26	80	6	NO
L20ARE26U50K	LED 20W 50K HID100 Replacement Lamp, E26 Base	100-277v	20	100	3000	150	5000	E26	80	6	NO

LED 200W METAL HALIDE REPLACEMENT AREA LAMP, EX39 BASE



L40AREX39U40K	LED 40W 40K HID200 Replacement Lamp, EX39 Base	100-277v	40	200	6000	150	4000	EX39	80	6	NO
L40AREX39U50K	LED 40W 50K HID200 Replacement Lamp, EX39 Base	100-277v	40	200	6000	150	5000	EX39	80	6	NO

LED 250W METAL HALIDE REPLACEMENT AREA LAMP, EX39 BASE



L60AREX39U40K	LED 60W 40K HID250 Replacement Lamp, EX39 Base	100-277v	60	250	9000	150	4000	EX39	80	6	NO
L60AREX39U50K	LED 60W 50K HID250 Replacement Lamp, EX39 Base	100-277v	60	250	9000	150	5000	EX39	80	6	NO

LED 320W METAL HALIDE REPLACEMENT AREA LAMP, EX39 BASE



L80AREX39U40K	LED 80W 40K HID320 Replacement Lamp, EX39 Base	100-277v	80	320	11200	150	4000	EX39	80	6	YES
L80AREX39U50K	LED 80W 50K HID320 Replacement Lamp, EX39 Base	100-277v	80	320	11200	150	5000	EX39	80	6	YES

LED 400W METAL HALIDE REPLACEMENT AREA LAMP, EX39 BASE



L110AREX39U40K	LED 110W 40K HID100 Replacement Lamp, EX39 Base	100-277v	110	400	15400	150	4000	EX39	80	6	YES
L110AREX39U50K	LED 110W 50K HID100 Replacement Lamp, EX39 Base	100-277v	110	400	15400	150	5000	EX39	80	6	YES

Item Number	Item Description	Voltage	Lamp Watts	Metal Halide Comparison	Lamp Lumens	LPW	Color Temperature	Base	CRI	Case Quantity	3 in 1 Dimming/Sensor
-------------	------------------	---------	------------	-------------------------	-------------	-----	-------------------	------	-----	---------------	-----------------------

50,000 HOUR LED HID REPLACEMENT CORN COB LAMPS

LED 50W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

L12CCE26U40K	LED 12W 40K HID Replacement Corn Cob Lamp, E26 Base	100-277v	12	50	1800	150	4000	E26	85	6	NO
L12CCE26U50K	LED 12W 50K HID Replacement Corn Cob Lamp, E26 Base	100-277v	12	50	1800	150	5000	E26	85	6	NO



LED 75W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

L18CCE26U40K	LED 18W 40K HID Replacement Corn Cob Lamp, E26 Base	100-277v	18	75	2700	150	4000	E26	85	6	NO
L18CCE26U50K	LED 18W 50K HID Replacement Corn Cob Lamp, E26 Base	100-277v	18	75	2700	150	5000	E26	85	6	NO



LED 100W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

L27CCE26U40K	LED 27W 40K HID Replacement Corn Cob Lamp, E26 Base	100-277v	27	100	4050	150	4000	E26	85	6	NO
L27CCE26U50K	LED 27W 50K HID Replacement Corn Cob Lamp, E26 Base	100-277v	27	100	4050	150	5000	E26	85	6	NO



LED 175W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

L36CCE26U40K	LED 36W 40K HID Replacement Corn Cob Lamp, E26 Base	100-277v	36	175	5400	150	4000	E26	85	6	YES
L36CCE26U50K	LED 36W 50K HID Replacement Corn Cob Lamp, E26 Base	100-277v	36	175	5400	150	5000	E26	85	6	YES



LED 200W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

L45CCE26U40K	LED 45W 40K HID Replacement Corn Cob Lamp, E26 Base	100-277v	45	200	6750	150	4000	E26	85	6	YES
L45CCE26U50K	LED 45W 50K HID Replacement Corn Cob Lamp, E26 Base	100-277v	45	200	6750	150	5000	E26	85	6	YES





Item Description	Item Number	Voltage	Lamp Watts	Metal Halide Comparison	Lamp Lumens	LPW	Color Temperature	Base	CRI	Case Quantity	3 in 1 Dimming/Sensor
------------------	-------------	---------	------------	-------------------------	-------------	-----	-------------------	------	-----	---------------	-----------------------

LED 200W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



L45CCEX39U40K	LED 45W 40K HID Replacement Corn Cob Lamp, EX39 Base	100-277	45	200	6750	150	4000	EX39	85	6	YES
L45CCEX39U50K	LED 45W 50K HID Replacement Corn Cob Lamp, EX39 Base	100-277	45	200	6750	150	5000	EX39	85	6	YES

LED 250W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



L54CCEX39U40K	LED 54W 40K HID Replacement Corn Cob Lamp, EX39 Base	100-277	54	250	8100	150	4000	EX39	85	6	YES
L54CCEX39U50K	LED 54W 50K HID Replacement Corn Cob Lamp, EX39 Base	100-277	54	250	8100	150	5000	EX39	85	6	YES

LED 300W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



L63CCEX39U40K	LED 63W 40K HID Replacement Corn Cob Lamp, EX39 Base	100-277	63	300	9450	150	4000	EX39	85	6	YES
L63CCEX39U50K	LED 63W 50K HID Replacement Corn Cob Lamp, EX39 Base	100-277	63	300	9450	150	5000	EX39	85	6	YES

LED 320W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



L80CCEX39U40K	LED 80W 40K HID Replacement Corn Cob Lamp, EX39 Base	100-277	80	320	12000	150	4000	EX39	85	6	YES
L80CCEX39U50K	LED 80W 50K HID Replacement Corn Cob Lamp, EX39 Base	100-277	80	320	12000	150	5000	EX39	85	6	YES

LED 400W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



L100CCEX39U40K	LED 100W 40K HID Replacement Corn Cob Lamp, EX39 Base	100-277	100	400	15000	150	4000	EX39	85	6	YES
L100CCEX39U50K	LED 100W 50K HID Replacement Corn Cob Lamp, EX39 Base	100-277	100	400	15000	150	5000	EX39	85	6	YES

LED 500W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



L120MHX395040K	LED 120W 40K HID Replacement Lamp, EX39 Base	100-277	100	400	18000	150	4000	EX39	85	6	YES
L120MHX395050K	LED 120W 50K HID Replacement Lamp, EX39 Base	100-277	100	400	18000	150	5000	EX39	85	6	YES

80

Many items are ENERGY STAR® qualified. Visit energystar.gov for a full listing



3 YEAR WARRANTY

5 YEAR WARRANTY


Consult www.tcp.com for warranty information.

LED HID CORN COB LAMP SENSORS

Specifications



LHSIR001



HID HB PIR Occupancy Sensor:

When connected to the TCP HID Corn Cob Lamp, the sensor delivers excellent motion detection. When no motion is detected, the TCP HID Corn Cob Lamp brightness will be switched to a preset Dim Level from 0 – 60%. When motion is detected, the TCP HID Corn Cob Lamp, brightness will be switched to 100% for a preset Hold Time. If natural light is present, the lamp will turn off.


Features:

- Normal Motion Detecting
- Daylight Threshold
- Step Dimming
- Do not expose directly to water
- One module for one lamp
- Not suitable for enclosed luminaries
- Set the Dim Level and Hold Time before installation

Voltage.....	15V DC ± 2V	Illuminance.....	Around 300LUX
Output Voltage.....	0-10V	Operating Temperature.....	-20°C ~ + 35°C (4°F~ + 95°F)
Current.....	20mA	Storage Temperature.....	-20°C ~ + 40°C (-4°F~ + 104°F)
Sensing Angle.....	120° (Installation Vertically)	Hold Time Options.....	30S/90S/5Min/10Min
Detecting Range.....	Around Dia 10m	IP Rating.....	IP20
Standby Power Range.....	0% - 60%	Warranty.....	5 Years



LHSDL001



HID HB Daylight Sensor:

When connected to the TCP HID Corn Cob Lamp, the sensor delivers natural light detection. When the natural light level is below the Lux setting, the TCP HID Corn Cob Lamp will turn on for the preset Hold Time. When the natural light level is above the Lux setting, the TCP HID Corn Cob Lamp will turn on.


Features:

- Only Identify Natural Light
- Daylight Threshold
- One module for one lamp
- Set the Lux Level and Hold Time before installation

Voltage.....	15V DC ± 2V	Operating Temperature.....	-20°C~ + 60°C, -4°F~ + 14-F
Output Voltage.....	0-10V	IP Rating.....	IP20
Current.....	20mA	Warranty.....	5 Years
LUX Range.....	20-∞		



LHSMW001



HID HB Microwave Occupancy Sensor:


When connected to the TCP HID Corn Cob Lamp, the sensor delivers 120° detection through objects and walls. When no motion is detected, the TCP HID Corn Cob Lamp brightness will be switched to a preset Dim Level from 0 – 60%. When motion is detected, the TCP HID Corn Cob Lamp brightness will be switched to 100% for a preset Hold Time.

Features:

- Normal Motion Detecting
- ON/OFF Function
- Step Dimming
- Do not expose directly to water
- One module for one lamp
- Not for outdoor use
- Set the Dim Level and Hold Time before installation

Frequency.....	5.8 GHz ± 75MHz	Detecting Range.....	Around Dia 10m
Voltage.....	15V DC ± 2V	Operating Temperature.....	-20°C ~ + 60°C (-4°F~ + 140°F)
Output Voltage.....	0-10V	Storage Temperature.....	-20°C ~ + 40°C (-4°F~ + 104°F)
Current.....	20mA	IP Rating.....	IP20
Transmit Power.....	1mW	Warranty.....	5 Years
Sensing Angle.....	120° (Installation Vertically)		

Sensor Installation

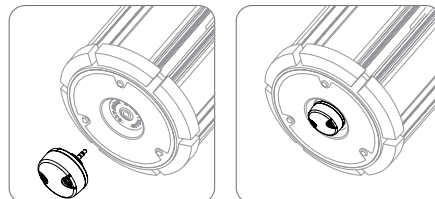



LED T8 AND T5 TUBES

TCP offers Instant Start T8 Tubes, LED T8 and T5 Type C tubes that work with remote LED devices, along with the Pro Line T8 tubes. All of these products are ideal for use in offices, restaurants, retail stores, lobbies, schools and hospitals. They are energy efficient and have a long life which minimizes the need for replacement and labor costs.

LED T8 AND T5 TUBES



Item Number	Item Description	Lamp Wattage	Voltage	Fluorescent Equivalency	Lumens	Lumens Per Watt	Base	CCT	CRI	Master Pack
50,000 HOUR LED LIBERAT8™ BALLAST BYPASS TUBES										
15W T8 BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE										
LT813B230K	LED 15W Ballast Bypass 4 Foot T8 - 30K	13.5	120-277v	32	1700	125.9	G13	3000	80	25
LT813B235K	LED 15W Ballast Bypass 4 Foot T8 - 35K	13.5	120-277v	32	1700	125.9	G13	3500	80	25
LT813B241K	LED 15W Ballast Bypass 4 Foot T8 - 41K	13.5	120-277v	32	1800	133.3	G13	4100	80	25
LT813B250K	LED 15W Ballast Bypass 4 Foot T8 - 50K	13.5	120-277v	32	1800	133.3	G13	5000	80	25
LT813B265K	LED 15W Ballast Bypass 4 Foot T8 - 65K	13.5	120-277v	32	1800	133.3	G13	6500	80	25
10.5W T8 BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE										
LT810B235K	LED 10.5W Ballast Bypass 4 Foot T8 - 35K	10.5	120-277v	32	1650	157.1	G13	3500	80	25
LT810B241K	LED 10.5W Ballast Bypass 4 Foot T8 - 41K	10.5	120-277v	32	1650	157.1	G13	4100	80	25
LT810B250K	LED 10.5W Ballast Bypass 4 Foot T8 - 50K	10.5	120-277v	32	1650	157.1	G13	5000	80	25
13.5W T8 BALLAST BYPASS - 4 FOOT SHATTERPROOF PET COATED GLASS TUBES, G13 BASE										
L13T8BY5030K	LED 13.5W Ballast Bypass 4 Foot T8 - 30K	13.5	120-277v	32	1700	133.3	G13	3000	80	25
L13T8BY5035K	LED 13.5W Ballast Bypass 4 Foot T8 - 35K	13.5	120-277v	32	1700	133.3	G13	3500	80	25
L13T8BY5041K	LED 13.5W Ballast Bypass 4 Foot T8 - 41K	13.5	120-277v	32	1800	140.7	G13	4100	80	25
L13T8BY5050K	LED 13.5W Ballast Bypass 4 Foot T8 - 50K	13.5	120-277v	32	1800	148.1	G13	5000	80	25
12W T8 BALLAST BYPASS - 3 FOOT SHATTERPROOF PET COATED GLASS TUBES, G13 BASE										
L12T8BY5030K	LED 12W Ballast Bypass 3 Foot T8 - 30K	12	120-277v	25	1400	100	G13	3000	80	25
L12T8BY5035K	LED 12W Ballast Bypass 3 Foot T8 - 35K	12	120-277v	25	1400	100	G13	3500	80	25
L12T8BY5041K	LED 12W Ballast Bypass 3 Foot T8 - 41K	12	120-277v	25	1450	100	G13	4100	80	25
L12T8BY5050K	LED 12W Ballast Bypass 3 Foot T8 - 50K	12	120-277v	25	1450	100	G13	5000	80	25
9W T8 BALLAST BYPASS - 2 FOOT SHATTERPROOF PET COATED GLASS TUBES, G13 BASE										
L9T8BY5030K	LED 9W Ballast Bypass 2 Foot T8 - 30K	9	120-277v	17	1100	125	G13	3000	80	25
L9T8BY5035K	LED 9W Ballast Bypass 2 Foot T8 - 35K	9	120-277v	17	1100	125	G13	3500	80	25
L9T8BY5041K	LED 9W Ballast Bypass 2 Foot T8 - 41K	9	120-277v	17	1150	133.3	G13	4100	80	25
L9T8BY5050K	LED 9W Ballast Bypass 2 Foot T8 - 50K	9	120-277v	17	1150	138.8	G13	5000	80	25





Item Number

Item Description

Lamp Wattage

Voltage

Fluorescent Equivalency

Lumens

Lumens Per Watt

Base

CCT

CRI

Master Pack

50,000 HOUR LED LIBERAT8™ BALLAST BYPASS TUBES**43W T8 BALLAST BYPASS - 8 FOOT GLASS TUBES, R17D BASE**

LT8R43B230KBP	LED 43W Ballast Bypass 8 Foot T8, R17d Base - 30K	43	120-277v	75	5100	118.6	R17d	3000	80	10
LT8R43B235KBP	LED 43W Ballast Bypass 8 Foot T8, R17d Base - 35K	43	120-277v	75	5500	127.9	R17d	3500	80	10
LT8R43B240KBP	LED 43W Ballast Bypass 8 Foot T8, R17d Base - 40K	43	120-277v	75	5500	127.9	R17d	4100	80	10
LT8R43B250KBP	LED 43W Ballast Bypass 8 Foot T8, R17d Base - 50K	43	120-277v	75	5500	127.9	R17d	5000	80	10
LT8R43B265KBP	LED 43W Ballast Bypass 8 Foot T8, R17d Base - 65K	43	120-277v	75	5500	127.9	R17d	6500	80	10

43W T8 BALLAST BYPASS - 8 FOOT GLASS TUBES, FA8 BASE

LT8F43B230KBP	LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 30K	43	120-277v	75	5100	118.6	Fa8	3000	80	10
LT8F43B235KBP	LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 35K	43	120-277v	75	5500	127.9	Fa8	3500	80	10
LT8F43B240KBP	LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 40K	43	120-277v	75	5500	127.9	Fa8	4000	80	10
LT8F43B250KBP	LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 50K	43	120-277v	75	5500	127.9	Fa8	5000	80	10
LT8F43B265KBP	LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 65K	43	120-277v	75	5500	127.9	Fa8	6500	80	10

34W T8 BALLAST BYPASS - 8 FOOT GLASS TUBES, FA8 BASE

LT8F34B240KBP	LED 34W Ballast Bypass 8 Foot T8, Fa8 Base - 40K	34	120-277v	60	4400	129.4	Fa8	4000	80	10
LT8F34B250KBP	LED 34W Ballast Bypass 8 Foot T8, Fa8 Base - 50K	34	120-277v	60	4400	129.4	Fa8	5000	80	10

15.5W T8 BALLAST BYPASS - 2 FOOT SHATTERPROOF U-BEND PLASTIC TUBES, G13 BASE

LPT8U615B230K	LED 15.5W Ballast Bypass 2 Foot U-Bend T8 - 30K	15.5	120-277v	32	2000	129	G13	3000	80	25
LPT8U615B235K	LED 15.5W Ballast Bypass 2 Foot U-Bend T8 - 35K	15.5	120-277v	32	2000	129	G13	3500	80	25
LPT8U615B241K	LED 15.5W Ballast Bypass 2 Foot U-Bend T8 - 41K	15.5	120-277v	32	2100	135.5	G13	4100	80	25
LPT8U615B250K	LED 15.5W Ballast Bypass 2 Foot U-Bend T8 - 50K	15.5	120-277v	32	2100	135.5	G13	5000	80	25

Item Number	Item Description	Lamp Wattage	Voltage	Fluorescent Equivalency	Lumens	Lumens Per Watt	Base	CCT	CRI	Master Pack
-------------	------------------	--------------	---------	-------------------------	--------	-----------------	------	-----	-----	-------------



50,000 HOUR LED LIBERAT8™ BALLAST BYPASS TUBES

24.5W T8 HIGH OUTPUT BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE

LPT824B230K	LED 24.5W High Output Ballast Bypass 4 Foot T8 - 30K	24.5	120-277v	32	2850	116.3	G13	3000	80	25
LPT824B235K	LED 24.5W High Output Ballast Bypass 4 Foot T8 - 35K	24.5	120-277v	32	2850	116.3	G13	3500	80	25
LPT824B241K	LED 24.5W High Output Ballast Bypass 4 Foot T8 - 41K	24.5	120-277v	32	3000	122.4	G13	4100	80	25
LPT824B250K	LED 24.5W High Output Ballast Bypass 4 Foot T8 - 50K	24.5	120-277v	32	3000	122.4	G13	5000	80	25

18.5W T8 HIGH OUTPUT BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE

LPT818B230K	LED 18.5W Ballast Bypass 4 Foot T8 - 30K	18.5	120-277v	32	2450	132.4	G13	3000	80	25
LPT818B235K	LED 18.5W Ballast Bypass 4 Foot T8 - 35K	18.5	120-277v	32	2450	132.4	G13	3500	80	25
LPT818B241K	LED 18.5W Ballast Bypass 4 Foot T8 - 41K	18.5	120-277v	32	2600	140.5	G13	4100	80	25
LPT818B250K	LED 18.5W Ballast Bypass 4 Foot T8 - 50K	18.5	120-277v	32	2600	140.5	G13	5000	80	25

15W T8 HIGH OUTPUT BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE **COMING SOON**

LPT815B230K	LED 15W High Output Ballast Bypass 4 Foot T8 - 30K	15	120-277v	32	2100	140	G13	3000	80	25
LPT815B235K	LED 15W High Output Ballast Bypass 4 Foot T8 - 35K	15	120-277v	32	2100	140	G13	3500	80	25
LPT815B241K	LED 15W High Output Ballast Bypass 4 Foot T8 - 41K	15	120-277v	32	2200	146.7	G13	4100	80	25
LPT815B250K	LED 15W High Output Ballast Bypass 4 Foot T8 - 50K	15	120-277v	32	2200	146.7	G13	5000	80	25



LIBERAT5™
LED

Item Number

Item Description

Lamp Wattage

Voltage

Fluorescent Equivalency

Lumens

Lumens Per Watt

Base

CCT

CRI

Master Pack

50,000 HOUR LED LIBERAT5™ BALLAST BYPASS TUBES

12W T5 HIGH OUTPUT BALLAST BYPASS - 2 FOOT ALL GLASS TUBES, G5 BASE

LT5H012B130K	LED 12W High Output Ballast Bypass 2 Foot T5 - 30K	12	120-277v	24	1450	120.8	G5	3000	80	25
LT5H012B135K	LED 12W High Output Ballast Bypass 2 Foot T5 - 35K	12	120-277v	24	1450	120.8	G5	3500	80	25
LT5H012B141K	LED 12W High Output Ballast Bypass 2 Foot T5 - 41K	12	120-277v	24	1450	120.8	G5	4100	80	25
LT5H012B150K	LED 12W High Output Ballast Bypass 2 Foot T5 - 50K	12	120-277v	24	1450	120.8	G5	5000	80	25

16W T5 HIGH OUTPUT BALLAST BYPASS - 3 FOOT ALL GLASS TUBES, G5 BASE

LT5H016B130K	LED 16W High Output Ballast Bypass 3 Foot T5 - 30K	16	120-277v	39	1850	115.6	G5	3000	80	25
LT5H016B135K	LED 16W High Output Ballast Bypass 3 Foot T5 - 35K	16	120-277v	39	1850	115.6	G5	3500	80	25
LT5H016B141K	LED 16W High Output Ballast Bypass 3 Foot T5 - 41K	16	120-277v	39	1850	115.6	G5	4100	80	25
LT5H016B150K	LED 16W High Output Ballast Bypass 3 Foot T5 - 50K	16	120-277v	39	1850	115.6	G5	5000	80	25

25W T5 HIGH OUTPUT BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G5 BASE (DLC SEARCH "LT5H025B1XXK")

LT5H025B130K	LED 25W High Output Ballast Bypass 4 Foot T5 - 30K	25	120-277v	54	3200	128	G5	3000	80	25
LT5H025B135K	LED 25W High Output Ballast Bypass 4 Foot T5 - 35K	25	120-277v	54	3200	128	G5	3500	80	25
LT5H025B141K	LED 25W High Output Ballast Bypass 4 Foot T5 - 41K	25	120-277v	54	3200	128	G5	4100	80	25
LT5H025B150K	LED 25W High Output Ballast Bypass 4 Foot T5 - 50K	25	120-277v	54	3200	128	G5	5000	80	25

9W T5 BALLAST BYPASS - 2 FOOT ALL GLASS TUBES, G5 BASE

LT5HE09B130K	LED 9W Ballast Bypass 2 Foot T8 - 30K	9	120-277v	14	1150	127.7	G5	3000	80	25
LT5HE09B135K	LED 9W Ballast Bypass 2 Foot T8 - 35K	9	120-277v	14	1150	127.7	G5	3500	80	25
LT5HE09B141K	LED 9W Ballast Bypass 2 Foot T8 - 41K	9	120-277v	14	1150	127.7	G5	4100	80	25
LT5HE09B150K	LED 9W Ballast Bypass 2 Foot T8 - 50K	9	120-277v	14	1150	127.7	G5	5000	80	25

12W T5 BALLAST BYPASS - 3 FOOT ALL GLASS TUBES, G5 BASE

LT5HE12B130K	LED 12W Ballast Bypass 3 Foot T8 - 30K	12	120-277v	21	1350	112.5	G5	3000	80	25
LT5HE12B135K	LED 12W Ballast Bypass 3 Foot T8 - 35K	12	120-277v	21	1350	112.5	G5	3500	80	25
LT5HE12B141K	LED 12W Ballast Bypass 3 Foot T8 - 41K	12	120-277v	21	1350	112.5	G5	4100	80	25
LT5HE12B150K	LED 12W Ballast Bypass 3 Foot T8 - 50K	12	120-277v	21	1350	112.5	G5	5000	80	25

13W T5 BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G5 BASE (DLC SEARCH "LT5HE13B1XXK")

LT5HE13B130K	LED 13W Ballast Bypass 4 Foot T8 - 30K	13	120-277v	28	1650	126.9	G5	3000	80	25
LT5HE13B135K	LED 13W Ballast Bypass 4 Foot T8 - 35K	13	120-277v	28	1650	126.9	G5	3500	80	25
LT5HE13B141K	LED 13W Ballast Bypass 4 Foot T8 - 41K	13	120-277v	28	1650	126.9	G5	4100	80	25
LT5HE13B150K	LED 13W Ballast Bypass 4 Foot T8 - 50K	13	120-277v	28	1650	126.9	G5	5000	80	25



Item Number	Item Description	Bare Lamp Wattage	Equivalent Wattage	LBF System Wattage	NBF System Wattage	HBF System Wattage	LBF Lamp Lumens	NBF Lamp Lumens	HBF Lamp Lumens	Base	CCT	CRI
-------------	------------------	-------------------	--------------------	--------------------	--------------------	--------------------	-----------------	-----------------	-----------------	------	-----	-----



50,000 HOUR LED DIRECT8™ INSTANT START COMPATIBLE

12W LED T8 INSTANT START - 4 FOOT GLASS TUBES (DLC SEARCH "L12T8D50")

L12T8D5030K	LED 12W IS/RS 4 Ft T8 - 30K	12	32	13	14.9	21.5	1260	1700	2280	G13	3000	80
L12T8D5035K	LED 12W IS/RS 4 Ft T8 - 35K	12	32	13	14.9	21.5	1300	1750	2340	G13	3500	80
L12T8D5041K	LED 12W IS/RS 4 Ft T8 - 41K	12	32	13	14.9	21.5	1340	1800	2400	G13	4100	80
L12T8D5050K	LED 12W IS/RS 4 Ft T8 - 50K	12	32	13	14.9	21.5	1380	1850	2480	G13	5000	80

18W LED T8 INSTANT START - 4 FOOT GLASS TUBES (DLC SEARCH "T80433")

LT818A30K	LED 18W IS/RS 4 Foot T8 - 30K	15	32	15.4	17.5	25.7	2000	2300	3380	G13	3000	80
LT818A35K	LED 18W IS/RS 4 Foot T8 - 35K	15	32	15.4	17.5	25.7	2050	2350	3450	G13	3500	80
LT818A41K	LED 18W IS/RS 4 Foot T8 - 41K	15	32	15.4	17.5	25.7	2050	2350	3450	G13	4100	80
LT818A50K	LED 18W IS/RS 4 Foot T8 - 50K	15	32	15.4	17.5	25.7	2100	2400	3525	G13	5000	80

12W LED HIGH CRI T8 INSTANT START - 4 FOOT GLASS TUBES

L12T8D5027K95	LED 12W IS/RS 4 Ft T8 - 27K 95	12	32	13	14.9	21.5	1300	1750	2340	G13	2700	90
L12T8D5030K95	LED 12W IS/RS 4 Ft T8 - 30K 95	12	32	13	14.9	21.5	1340	1800	2400	G13	3000	90
L12T8D5035K95	LED 12W IS/RS 4 Ft T8 - 35K 95	12	32	13	14.9	21.5	1340	1800	2400	G13	3500	90
L12T8D5041K95	LED 12W IS/RS 4 Ft T8 - 41K 95	12	32	13	14.9	21.5	1360	1825	2425	G13	4100	90
L12T8D5050K95	LED 12W IS/RS 4 Ft T8 - 50K 95	12	32	13	14.9	21.5	1380	1850	2480	G13	5000	90
T80414095P	LED 12W IS/RS 4 Ft T8 - 41K95	12	32	12.5	15	21.5	1050	1400	1860	G13	4100	90

Item Number	Item Description	Bare Lamp Wattage	Equivalent Wattage	LBF System Wattage	NBF System Wattage	HBF System Wattage	LBF Lamp Lumens	NBF Lamp Lumens	HBF Lamp Lumens	Base	CCT	CRI
-------------	------------------	-------------------	--------------------	--------------------	--------------------	--------------------	-----------------	-----------------	-----------------	------	-----	-----

50,000 HOUR LED DIRECT8™ INSTANT START COMPATIBLE CONTINUED

9.5W LED HIGH OUTPUT T8 INSTANT START - 4 FOOT PET COATED GLASS TUBES



LPT809H0A41K	LED 9.5W IS/RS 4 Ft T8 H0 A - 41K SC	9.5	32	11.5	13	19	1400	1900	2500	G13	4100	80
LPT809H0A50K	LED 9.5W IS/RS 4 Ft T8 H0 A - 50K SC	9.5	32	11.5	13	19	1450	2000	2600	G13	5000	80

11W T8 HIGH EFFICACY INSTANT START - 4 FOOT GLASS TUBES

L11T8D5030K	LED 11W High Efficacy IS/RS 4 Ft T8 - 30K	11	32	11.3	13.6	18.5	1340	1800	2410	G13	3000	80
L11T8D5035K	LED 11W High Efficacy IS/RS 4 Ft T8 - 35K	11	32	11.3	13.6	18.5	1380	1850	2480	G13	3500	80
L11T8D5041K	LED 11W High Efficacy IS/RS 4 Ft T8 - 41K	11	32	11.3	13.6	18.5	1410	1900	2540	G13	4100	80
L11T8D5050K	LED 11W High Efficacy IS/RS 4 Ft T8 - 50K	11	32	11.3	13.6	18.5	1450	1950	2610	G13	5000	80

10W T8 HIGH EFFICACY INSTANT START - 4 FOOT GLASS TUBES BULK PACKS (DLC SEARCH "T80430")

T804304EBP	LED 13W IS/RS 4 Ft T8 - 41K Bulk Pack	10	32	11.6	13.2	19.4	1625	1850	2700	G13	4100	80
------------	---------------------------------------	----	----	------	------	------	------	------	------	-----	------	----

11W T8 INSTANT START - 3 FOOT GLASS TUBES

L11T83D5030K	LED 11W IS/RS 3 Ft T8 - 30K	11	25	11.6	13.5	19.2	1040	1400	1870	G13	3000	80
L11T83D5035K	LED 11W IS/RS 3 Ft T8 - 35K	11	25	11.6	13.5	19.2	1080	1450	1940	G13	3500	80
L11T83D5041K	LED 11W IS/RS 3 Ft T8 - 41K	11	25	11.6	13.5	19.2	1110	1500	2000	G13	4100	80
L11T83D5050K	LED 11W IS/RS 3 Ft T8 - 50K	11	25	11.6	13.5	19.2	1150	1550	2070	G13	5000	80

9W T8 INSTANT START - 2 FOOT GLASS TUBES

L9T8D5030K	LED 9W IS/RS 2 Ft T8 - 30K	9	17	8.5	9.5	14.2	850	1150	1540	G13	3000	80
L9T8D5035K	LED 9W IS/RS 2 Ft T8 - 35K	9	17	8.5	9.5	14.2	870	1175	1575	G13	3500	80
L9T8D5041K	LED 9W IS/RS 2 Ft T8 - 41K	9	17	8.5	9.5	14.2	890	1200	1600	G13	4100	80
L9T8D5050K	LED 9W IS/RS 2 Ft T8 - 50K	9	17	8.5	9.5	14.2	910	1225	1640	G13	5000	80

Item Number	Item Description	Bare Lamp Wattage	Equivalent Wattage	LBF System Wattage	NBF System Wattage	HBF System Wattage	LBF Lamp Lumens	NBF Lamp Lumens	HBF Lamp Lumens	Base	CCT	CRI
-------------	------------------	-------------------	--------------------	--------------------	--------------------	--------------------	-----------------	-----------------	-----------------	------	-----	-----

50,000 HOUR LED DIRECT8™ INSTANT START COMPATIBLE CONTINUED

15W LED T8 INSTANT START BALLAST COMPATIBLE - 4 FOOT SHATTER PROOF TUBES BULK PACK (DLC SEARCH "LPT815A")

LPT815A41KBP	LED 15W IS/RS SC 4 Foot T8 - 41K Bulk Pack	15	32	15	18	21.5	1650	2100	2450	G13	4100	80
--------------	--	----	----	----	----	------	------	------	------	-----	------	----



15W LED T8 INSTANT START/RAPID START BALLAST COMPATIBLE - 4 FOOT SHATTER PROOF GLASS TUBES

L15T8D5030KSC	LED 15W IS/RS SC 4 Ft T8 - 30K	15	32	14.5	18	21.5	1600	2000	2350	G13	3000	80
---------------	--------------------------------	----	----	------	----	------	------	------	------	-----	------	----

L15T8D5035KSC	LED 15W IS/RS SC 4 Ft T8 - 35K	15	32	14.5	18	21.5	1600	2000	2350	G13	3500	80
---------------	--------------------------------	----	----	------	----	------	------	------	------	-----	------	----

L15T8D5041KSC	LED 15W IS/RS SC 4 Ft T8 - 41K	15	32	14.5	18	21.5	1650	2100	2450	G13	4100	80
---------------	--------------------------------	----	----	------	----	------	------	------	------	-----	------	----

L15T8D5050KSC	LED 15W IS/RS SC 4 Ft T8 - 50K	15	32	14.5	18	21.5	1700	2200	2500	G13	5000	80
---------------	--------------------------------	----	----	------	----	------	------	------	------	-----	------	----



12W LED T8 INSTANT START/PROGRAMMED START BALLAST COMPATIBLE - 4 FOOT ALL GLASS TUBES

L12T8PS5030K	LED 12W IS/PS 4 Ft T8 - 30K	12	32	13	14.9	21.5	1260	1700	2280	G13	3000	80
--------------	-----------------------------	----	----	----	------	------	------	------	------	-----	------	----

L12T8PS5035K	LED 12W IS/PS 4 Ft T8 - 35K	12	32	13	14.9	21.5	1300	1750	2340	G13	3500	80
--------------	-----------------------------	----	----	----	------	------	------	------	------	-----	------	----

L12T8PS5041K	LED 12W IS/PS 4 Ft T8 - 41K	12	32	13	14.9	21.5	1340	1800	2400	G13	4100	80
--------------	-----------------------------	----	----	----	------	------	------	------	------	-----	------	----

L12T8PS5050K	LED 12W IS/PS 4 Ft T8 - 50K	12	32	13	14.9	21.5	1380	1850	2480	G13	5000	80
--------------	-----------------------------	----	----	----	------	------	------	------	------	-----	------	----

13W LED U-BEND T8 INSTANT START/RAPID START BALLAST COMPATIBLE - 6 INCH PLASTIC

L13T8UD5030K	LED 13W U6 IS/RS 4 Ft T8 - 30K	13	32	13	16	22	1400	1800	2500	2G13	3000	83
--------------	--------------------------------	----	----	----	----	----	------	------	------	------	------	----

L13T8UD5035K	LED 13W U6 IS/RS 4 Ft T8 - 35K	13	32	13	16	22	1400	1800	2500	2G13	3500	83
--------------	--------------------------------	----	----	----	----	----	------	------	------	------	------	----

L13T8UD5041K	LED 13W U6 IS/RS 4 Ft T8 - 41K	13	32	13	16	22	1450	1850	2550	2G13	4100	83
--------------	--------------------------------	----	----	----	----	----	------	------	------	------	------	----

L13T8UD5050K	LED 13W U6 IS/RS 4 Ft T8 - 50K	13	32	13	16	22	1500	1900	2600	2G13	5000	83
--------------	--------------------------------	----	----	----	----	----	------	------	------	------	------	----





Item Number	Item Description	Lamp Wattage	Equivalent Wattage	System Wattage	Lamp Lumens	Lumens Per Watt	Base	CCT	CRI
-------------	------------------	--------------	--------------------	----------------	-------------	-----------------	------	-----	-----

50,000 HOUR LED DIRECT5™ ELECTRONIC BALLAST COMPATIBLE

25.5W LED T5 ELECTRONIC BALLAST COMPATIBLE - 4 FOOT SHATTERPROOF GLASS TUBES



L25T5D5030K	LED 25W IS/RS SC 4 Ft T5 - 30K	25.5	54	28	3150	123.5	G5	3000	83
L25T5D5035K	LED 25W IS/RS SC 4 Ft T5 - 35K	25.5	54	28	3150	123.5	G5	3500	83
L25T5D5041K	LED 25W IS/RS SC 4 Ft T5 - 41K	25.5	54	28	3190	125.1	G5	4100	83
L25T5D5050K	LED 25W IS/RS SC 4 Ft T5 - 50K	25.5	54	28	3280	128.6	G5	5000	83

13W LED T5 ELECTRONIC BALLAST COMPATIBLE - 4 FOOT SHATTERPROOF GLASS TUBES

L13T5D5030K	LED 25W IS/RS SC 4 Ft T5 - 30K	13	28	16	1800	138.5	G5	3000	83
L13T5D5035K	LED 25W IS/RS SC 4 Ft T5 - 35K	13	28	16	1800	138.5	G5	3500	83
L13T5D5041K	LED 25W IS/RS SC 4 Ft T5 - 41K	13	28	16	1850	142.3	G5	4100	83
L13T5D5050K	LED 25W IS/RS SC 4 Ft T5 - 50K	13	28	16	1900	146.2	G5	5000	83

Item Number	DLC Model #	Item Description	Line Voltage Wattage	Line Voltage Lumens	Line Voltage LPW	LBF System Wattage	NBF System Wattage	LBF Lamp Lumens	NBF Lamp Lumens	NBF System LPW	PF	CCT	CRI
-------------	-------------	------------------	----------------------	---------------------	------------------	--------------------	--------------------	-----------------	-----------------	----------------	----	-----	-----

50,000 HOUR LED T8 TYPE AB TUBES - BALLAST AND LINE VOLTAGE COMPATIBLE

15W LED T8 - 4 FOOT GLASS TUBES



LT815AB30K	T80407030E	LED 15W 4Ft T8 AB - 30K	16	1750	109.4	13.6	15.3	1550	1760	115	>.9	3000	>80
LT815AB35K	T80407035E	LED 15W 4Ft T8 AB - 35K	16	1800	112.5	13.6	15.3	1550	1760	115	>.9	3500	>80
LT815AB41K	T80407040E	LED 15W 4Ft T8 AB - 41K	16	1800	112.5	13.6	15.3	1590	1800	117.6	>.9	4100	>80
LT815AB50K	T80407050E	LED 15W 4Ft T8 AB - 50K	16	1800	112.5	13.6	15.3	1590	1800	117.6	>.9	5000	>80

15.5W LED T8 - 4 FOOT SHATTERPROOF COATED TUBES

LPT815AB30K	T8041430E	LED 15.5W 4Ft T8 AB PL -30K	16	1750	109.4	13.6	15.3	1550	1760	115	>.9	3000	>80
LPT815AB35K	T8041435E	LED 15.5W 4Ft T8 AB PL -35K	16	1750	109.4	13.6	15.3	1550	1760	115	>.9	3500	>80
LPT815AB41K	T8041440E	LED 15.5W 4Ft T8 AB PL -41K	16	1800	112.5	13.6	15.3	1590	1800	117.6	>.9	4100	>80
LPT815AB50K	T8041450E	LED 15.5W 4Ft T8 AB PL -50K	16	1850	115.6	13.6	15.3	1620	1850	120.9	>.9	5000	>80

Item Number	Item Description	Lamp Wattage	System Wattage	Voltage	Fluorescent Equivalency	Lumens	Lumens Per Watt	Base	CCT	CRI	Master Pack
-------------	------------------	--------------	----------------	---------	-------------------------	--------	-----------------	------	-----	-----	-------------

50,000 HOUR LED T8 4 FOOT TYPE C TUBES

12W T8 TYPE C - 4 FOOT SINGLE END WIRED PET COATED GLASS TUBES, G13 BASE **DLC LOOK UP# T80457CXXK**

LT812C35K	LED 12W Type C 4 Foot T8 - 35K	12	12	120-277v	32	1800	150	G13	3500	>80	25
LT812C40K	LED 12W Type C 4 Foot T8 - 40K	12	12	120-277v	32	1800	150	G13	4100	>80	25
LT812C50K	LED 12W Type C 4 Foot T8 - 50K	12	12	120-277v	32	1800	150	G13	5000	>80	25



DRIVER SPECIFICATIONS, 0-10V DIMMABLE

LDT8212C	LED Type C T8 4Ft 2 Lamp Driver	-	30, 45, 60	120-277v	-	3600	138	-	-	-	25
LDT8312C	LED Type C T8 4Ft 3 Lamp Driver	-	30, 45, 60	120-277v	-	5400	138	-	-	-	25
LDT8412C	LED Type C T8 4Ft 4 Lamp Driver	-	30, 45, 60	120-277v	-	7200	138	-	-	-	25

50,000 HOUR LED T5 4 FOOT TYPE C TUBES - ITEMS HO

22W T5 TYPE C - 4 FOOT DOUBLE OR SINGLE END WIRED PET COATED GLASS TUBES, G5 BASE **DLC LOOK UP# LT5H0100C4XXK**

LT5H025C35K	LED 22W Type C 4 Foot T5 - 35K	22	25	120-277v	54	3200	145.5	G5	3500	>80	25
LT5H025C40K	LED 22W Type C 4 Foot T5 - 40K	22	25	120-277v	54	3300	150	G5	4100	>80	25
LT5H025C50K	LED 22W Type C 4 Foot T5 - 50K	22	25	120-277v	54	3400	154.5	G5	5000	>80	25



DRIVER SPECIFICATIONS, 0-10V DIMMABLE

LDT5H0225C	LED Type C T5 4Ft 2 Lamp HO Driver	-	50	120-277v	-	6400, 6600, 6800	136	-	-	-	25
LDT5H0425C	LED Type C T5 4Ft 3 Lamp HO Driver	-	100	120-277v	-	12800, 13200, 13600	136	-	-	-	25

50,000 HOUR LED T5 4 FOOT TYPE C TUBES - ITEMS HE

12W T5 TYPE C - 4 FOOT SINGLE END WIRED PET COATED GLASS TUBES, G5 BASE **DLC LOOK UP# LT5HE26C2XXK/ LT5HE52C4XXK**

LT5HE13C35K	LED 12W Type C HE 4 Foot T5 - 35K	12	13	120-277v	26	1700	141.7	G5	3500	>80	25
LT5HE13C40K	LED 12W Type C HE 4 Foot T5 - 40K	12	13	120-277v	26	1750	145.8	G5	4100	>80	25
LT5HE13C50K	LED 12W Type C HE 4 Foot T5 - 50K	12	13	120-277v	26	1800	150	G5	5000	>80	25



DRIVER SPECIFICATIONS, 0-10V DIMMABLE

LDT5HE213C	LED Type C T5 4Ft 2 Lamp HE Driver	-	26	120-277v	-	3400, 3500, 3600	138	-	-	-	25
LDT5HE413C	LED Type C T5 4Ft 3 Lamp HE Driver	-	52	120-277v	-	6800, 7000, 7200	138	-	-	-	25



Item Number	Item Description	Line Voltage Wattage	Line Voltage Wattage	Line Voltage LPW	Lamp Wattage	Equivalency Wattage	NBF System Wattage	NBF System Lumens	NBF System LPW	Base	CCT	Voltage	CRI
-------------	------------------	----------------------	----------------------	------------------	--------------	---------------------	--------------------	-------------------	----------------	------	-----	---------	-----

50,000 HOUR LED PROLINE INSTANT START COMPATIBLE T8 TUBES - TYPE A

15W T8 PROLINE INSTANT START - 4 FOOT GLASS TUBES



LS4T815IS41K	LED 15W Proline IS 4 Ft T8 - 41K	-	-	-	15	32	17	1800	105.8	G13	4100	120-277	80
LS4T815IS50K	LED 15W Proline IS 4 Ft T8 - 50K	-	-	-	15	32	17	1800	105.8	G13	5000	120-277	80

15W T8 PROLINE INSTANT START - 4 FOOT U-BEND PLASTIC TUBES



LSU6T815IS41K	LED 15W Proline IS 4 Ft U6 T8 - 41K	-	-	-	15	32	17	1800	100	G13	4100	120-277	80
LSU6T815IS50K	LED 15W Proline IS 4 Ft U6 T8 - 50K	-	-	-	15	32	17	1800	100	G13	5000	120-277	80

50,000 HOUR LED PROLINE BYPASS T8 TUBES - TYPE B

14W T8 PROLINE 2E BYPASS - 4 FOOT GLASS TUBES



LS4T814B241K	LED 14W Proline 2E Bypass 4 Ft T8 - 41K	14	1800	128.6	-	32	-	-	-	G13	4100	120-277	80
LS4T814B250K	LED 14W Proline 2E Bypass 4 Ft T8 - 50K	14	1800	128.6	-	32	-	-	-	G13	5000	120-277	80

50,000 HOUR LED PROLINE T8 TUBES - TYPE AB

COMING SOON

15W T8 PROLINE TYPE AB - 4 FOOT GLASS TUBES



LS4T816AB41K	LED 16W AB2 4 Ft T8 - 41K	-	-	-	-	32	-	-	-	G13	4100	120-277	80
--------------	---------------------------	---	---	---	---	----	---	---	---	-----	------	---------	----

Item Number	Item Description	Voltage	Lamp Count	Lamp Type	Options
LED T8 READY ELITE HIGH BAY					
EL4WA4LT8B1	Elite, 4 Lamp T8, Universal, Single End, Non-Dimming	120-277V	4	T8	see below
EL4WA4LT8B2	Elite, 4 Lamp T8, Universal, Double End, Non-Dimming	120-277V	4	T8	
EL4WA6LT8B1	Elite, 6 Lamp T8, Universal, Single End, Non-Dimming	120-277V	6	T8	
EL4WA6LT8B2	Elite, 6 Lamp T8, Universal, Double End, Non-Dimming	120-277V	6	T8	
EL4WA8LT8B1	Elite, 8 Lamp T8, Universal, Single End, Non-Dimming	120-277V	8	T8	
EL4WA8LT8B2	Elite, 8 Lamp T8, Universal, Double End, Non-Dimming	120-277V	8	T8	



AVAILABLE ACCESSORIES (ordered separately; sensors can be installed at factory):


LS1 – Leviton PIR Occupancy Sensor w/bracket and interchangeable lenses, 40' or less, 120V, 277V or 347V

10C – 10' Power Cord 277V SJTooW No Plug

AVAILABLE HANGING KITS):

EZHANGER – 15' adjustable aircraft cable hanging kit (ordered separately)

Item Number	Item Description	Voltage	LED Strip Count	Strip Length	Controls	Wattage	Color Temperature
LED MAGNETIC RETROFIT KITS							
RK12D1641K	LED Retrofit Kit, 1 21" strip, 0-10V Dimming, 16 Watts, 41K	120-277V	1	21	0-10V Dimming	16	41K
RK12D1650K	LED Retrofit Kit, 1 21" strip, 0-10V Dimming, 16 Watts, 50K	120-277V	1	21	0-10V Dimming	16	50K
RK22D1641K	LED Retrofit Kit, 2 21" strip, 0-10V Dimming, 16 Watts, 41K	120-277V	2	21	0-10V Dimming	16	41K
RK22D1650K	LED Retrofit Kit, 2 21" strip, 0-10V Dimming, 16 Watts, 50K	120-277V	2	21	0-10V Dimming	16	50K
RK12D3241K	LED Retrofit Kit, 1 21" strip, 0-10V Dimming, 32Watts, 41K	120-277V	1	21	0-10V Dimming	32	41K
RK12D3250K	LED Retrofit Kit, 1 21" strip, 0-10V Dimming, 32 Watts, 50K	120-277V	1	21	0-10V Dimming	32	50K
RK22D3241K	LED Retrofit Kit, 2 21" strip, 0-10V Dimming, 32 Watts, 41K	120-277V	2	21	0-10V Dimming	32	41K
RK22D3250K	LED Retrofit Kit, 2 21" strip, 0-10V Dimming, 32 Watts, 50K	120-277V	2	21	0-10V Dimming	32	50K
RK14D1641K	LED Retrofit Kit, 1 42" strip, 0-10V Dimming, 16 Watts, 41K	120-277V	1	42	0-10V Dimming	16	41K
RK14D1650K	LED Retrofit Kit, 1 42" strip, 0-10V Dimming, 16 Watts, 50K	120-277V	1	42	0-10V Dimming	16	50K
RK24D1641K	LED Retrofit Kit, 2 42" strip, 0-10V Dimming, 16 Watts, 41K	120-277V	2	42	0-10V Dimming	16	41K
RK24D1650K	LED Retrofit Kit, 2 42" strip, 0-10V Dimming, 16 Watts, 50K	120-277V	2	42	0-10V Dimming	16	50K
RK14D3241K	LED Retrofit Kit, 1 42" strip, 0-10V Dimming, 32 Watts, 41K	120-277V	1	42	0-10V Dimming	32	41K
RK14D3250K	LED Retrofit Kit, 1 42" strip, 0-10V Dimming, 32 Watts, 50K	120-277V	1	42	0-10V Dimming	32	50K
RK24D3241K	LED Retrofit Kit, 2 42" strip, 0-10V Dimming, 32 Watts, 41K	120-277V	2	42	0-10V Dimming	32	41K
RK24D3250K	LED Retrofit Kit, 2 42" strip, 0-10V Dimming, 32 Watts, 50K	120-277V	2	42	0-10V Dimming	32	50K



CFL LAMPS

TCP carries fluorescent spring lamps, circlines and GU 24 bulbs. Our compact fluorescent products can be used anywhere a standard incandescent is used including in table lamps, recessed downlighting, wall sconces, ceiling fixtures and ceiling fans.



Item Number	Item Description	Unit/Ballast Watts	Incandescent Comparison (Watts)	Initial Lumens	CCT (Kelvin)	CRI	MOL/Height (inches)	Diameter/Width (inches)	Base Type	Case Quantity
12,000 HOUR CFL PRO SERIES										
TCP PRO SERIES T3 FULL SPRINGLAMPS®, NPF										
48909	9 Watt Full SpringLamp	9	40W	600	2700	82	3.6	1.8	E26	12
48913	13 Watt Full SpringLamp	13	60W	925	2700	82	3.9	1.8	E26	12
48913C	13 Watt Full SpringLamp, E12	13	60W	925	2700	82	3.8	1.8	E12	12
48918	18 Watt Full SpringLamp	18	75W	1300	2700	82	4.0	2.4	E26	12
48923	23 Watt Full SpringLamp	23	100W	1650	2700	82	4.4	2.4	E26	12
48927	27 Watt Full SpringLamp	27	100W	1850	2700	82	5.1	2.4	E26	12
48932	32 Watt Full SpringLamp	32	125W	2150	2700	82	5.1	2.7	E26	12
48942	42 Watt Full SpringLamp	42	150W	2850	2700	82	5.7	2.7	E26	12
TCP PRO SERIES T2 FULL SPRINGLAMPS®, NPF										
4T213	13 Watt T2 Full SpringLamp	13	60W	825	2700	82	3.6	1.5	E26	12
4T213C	13 Watt T2 Full SpringLamp E12	13	60W	825	2700	82	3.5	1.5	E12	12
10,000 HOUR E26 BASE AND MOGUL BASE SPRINGLAMPS®										
SPRINGLAMPS®, ELECTRONIC, NPF, <150% THD										
28968	68 Watt SpringLamp	68	300W	4200	2700	82	9.5	4.1	E26	6





SpringLight™

10,000 HOUR SPRINGLIGHT™

SPRINGLIGHT™ SPRINGLAMP®



9w SpringLamp

Item Number	Item Description	Unit/Ballast Watts	Incandescent Comparison (Watts)	Initial Lumens	CCT (Kelvin)	CRI	MOL/Height (inches)	Diameter/Width (inches)	Base Type	Case Quantity
801009	9W SpringLamp 27K	9	40	550	2700	82	4.0	1.8	E26	12
80100941	9W SpringLamp 41K	9	40	550	4100	82	4.0	1.8	E26	12
80100950	9W SpringLamp 50K	9	40	500	5000	82	4.0	1.8	E26	12



14w SpringLamp

801014	14W SpringLamp 27K	14	60	900	2700	82	4.4	1.8	E26	12
8010143	14W SpringLamp 27K 3PK	14	60	900	2700	82	4.4	1.8	E26	12
80101435	14W SpringLamp 35K	14	60	900	3500	82	4.4	1.8	E26	12
80101441	14W SpringLamp 41K	14	60	900	4100	82	4.4	1.8	E26	12
801014413	14W SpringLamp 41K 3PK	14	60	900	4100	82	4.4	1.8	E26	12
80101450	14W SpringLamp 50K	14	60	850	5000	82	4.4	1.8	E26	12
80101465	14W SpringLamp 65K	14	60	850	6500	82	4.4	1.8	E26	12



19w SpringLamp

801019	19W SpringLamp 27K	19	75	1225	2700	82	4.4	2.3	E26	12
8010193	19W SpringLamp 27K 3PK	19	75	1225	2700	82	4.4	2.3	E26	12
80101935	19W SpringLamp 35K	19	75	1225	3500	82	4.4	2.3	E26	12
80101941	19W SpringLamp 41K	19	75	1225	4100	82	4.4	2.3	E26	12
80101950	19W SpringLamp 50K	19	75	1225	5000	82	4.4	2.3	E26	12
80101965	19W SpringLamp 65K	19	75	1225	6500	82	4.4	2.3	E26	12



23w SpringLamp

801023	23W SpringLamp 27K	23	100	1600	2700	82	4.8	2.3	E26	12
8010233	23W SpringLamp 27K 3PK	23	100	1600	2700	82	4.8	2.3	E26	12
80102335	23W SpringLamp 35K	23	100	1600	3500	82	4.8	2.3	E26	12
80102341	23W SpringLamp 41K	23	100	1600	4100	82	4.8	2.3	E26	12
80102350	23W SpringLamp 50K	23	100	1500	5000	82	4.8	2.3	E26	12
80102365	23W SpringLamp 65K	23	100	1500	6500	82	4.8	2.3	E26	12



27w SpringLamp

801027	27W SpringLamp 27K	27	100	1750	2700	82	5.5	2.4	E26	12
80102735	27W SpringLamp 35K	27	100	1750	3500	82	5.5	2.4	E26	12
80102741	27W SpringLamp 41K	27	100	1750	4100	82	5.5	2.4	E26	12
80102750	27W SpringLamp 50K	27	100	1750	5000	82	5.5	2.4	E26	12

SpringLight™ WARRANTY

801 Series – 10,000 hours – 9 Years – LIMITED WARRANTY*

This product is warranted for a period of 9 YEARS* from date of original purchase against defects in materials and workmanship. If this product should fail to operate due to defects in material or workmanship, simply call 1-800-771-9335 within WARRANTED TIME of purchase. This product will be repaired or replaced, at TCP's option. This warranty is expressly limited to repair or replacement of the product. This warranty gives the consumer specific legal rights, which vary from state to state. WARRANTY IS VOID IF PRODUCT IS NOT USED FOR THE PURPOSE FOR WHICH THIS PRODUCT IS MANUFACTURED.

Contact Customer Service for inventory availability and special orders.

*Based on 3 hours average use per day

Consult tcp.com for the latest warranty & specification information.

Item Number	Item Description	Unit/Ballast Watts	Lamp Watts	Incandescent Comparison (Watts)	Initial Lumens	CCT (Kelvin)	CRI	MOL/Height (inches)	Diameter/Width (inches)	Replacement Bracket	Replacement Lamp	Base Type	Replacement Ballast	Case Quantity
-------------	------------------	--------------------	------------	---------------------------------	----------------	--------------	-----	---------------------	-------------------------	---------------------	------------------	-----------	---------------------	---------------

10,000 HOUR CIRCLINE

T6 CIRCLINE LAMPS, 2700K

32027	27 Watt Circline Lamp	NA	27	120	2000	2700	82	0.8	7.5	13827B	N/A	N/A	N/A	20
32032	32 Watt Circline Lamp	NA	32	130	2200	2700	82	0.8	9.0	13832B	N/A	N/A	N/A	20
32040	40 Watt Circline Lamp	NA	40	150	2800	2700	82	0.8	7.5	13818B	N/A	N/A	N/A	20



T9 CIRCLINE LAMPS, 2700K

32030	30 Watt Circline Lamp	NA	30	120	2000	2700	NA	1.0	9.0	13830B	N/A	N/A	N/A	20
-------	-----------------------	----	----	-----	------	------	----	-----	-----	--------	-----	-----	-----	----



CIRCLINE BALLASTS, NPF

17030	30 Watt Circline Ballast	30	NA	NA	NA	NA	NA	NA	NA	NA	N/A	E26	N/A	50
17030Q	30 Watt Circline Ballast	30	NA	NA	NA	NA	NA	NA	NA	NA	N/A	E26	N/A	50
17040Q2	40 Watt Circline Ballast	40	NA	NA	NA	NA	NA	NA	NA	NA	N/A	E26	N/A	50
4001	40 Watt Circline Ballast	40	NA	NA	NA	NA	NA	NA	NA	NA	N/A	E26	N/A	50



Add suffix "Q" for Snap-in Version. Item #4001 for Hard-wire base only.

Item Number	Item Description	Unit/Ballast Watts	Incandescent Comparison (Watts)	Initial Lumens	CCT (Kelvin)	CRI	MOL/Height (inches)	Diameter/Width (inches)	Input Line	Base Type	Case Quantity
-------------	------------------	--------------------	---------------------------------	----------------	--------------	-----	---------------------	-------------------------	------------	-----------	---------------

10,000 HOUR GU 24 BASES

GU24 SPRINGLAMPS

33113SP	13 Watt SpringLamp	13	60	900	2700	82	3.6	1.8	.22A	GU24	12
33118SP	18 Watt SpringLamp	18	75	1200	2700	82	3.8	2.3	.30A	GU24	12
33123SP	23 Watt SpringLamp	23	100	1600	2700	82	4.4	2.4	.43A	GU24	12
33127SP	27 Watt SpringLamp	27	100	1850	2700	82	4.8	2.4	.45A	GU24	12
33132SP	32 Watt SpringLamp	32	120	2200	2700	82	5.1	2.7	.53A	GU24	12
33213SSP	13 Watt Low Profile	13	60	900	2700	82	2.3	3.2	.22A	GU24	12





EXIT AND EMERGENCY

TCP is your source for universal combo emergency exit and compact polycarbonate exit signs, exit and emergency wire guards, as well as LED low profile thermoplastic emergency lights. Both the universal combo emergency exit sign and compact polycarbonate sign come with a white housing and either red or green lettering.

Item Number	Item Description	Voltage	Color	
EMERGENCY LIGHTING / EXIT SIGNS				
REMOTE HEAD LIGHTS				
LEDRH1	LED Outdoor Polycarbonate/Die-Cast Remote Single Head	120V or 277 V	Gray	
LEDRH1B	LED Outdoor Polycarbonate/Die-Cast Remote Single Head	120V or 277 V	Black	
LEDRH2	LED Outdoor Polycarbonate/Die-Cast Remote Double Head	120V or 277 V	Gray	
LEDRH2B	LED Outdoor Polycarbonate/Die-Cast Remote Double Head	120V or 277 V	Black	
STANDARD EMERGENCY LIGHTS				
SELF-DIAGNOSTIC TEST				
LEDWELSDT	LED Emergency Light, Self Diagnostic Test	Dual 120V/277 V	White	
LEDWELRC	LED Emergency Light Remote Capable	Dual 120V/277 V	White	
LEDWELRCSDT	LED Emergency Light, White Remote Capable, Self Diagnostic Test	Dual 120V/277 V	White	
LEDWEL / 20760	LED Emergency Light	Dual 120V/277 V	White	
LED EXIT SIGNS				
22742	Red LED Exit Sign Universal AC Only WH Housing	Dual 120V/277V	Red/White	
22743	Red LED Exit Sign Universal Battery Backup WH Housing	Dual 120V/277V	Green/White	
22744	Green LED Exit Sign Universal AC Only WH Housing	Dual 120V/277V	Red/White	
22745	Green LED Exit Sign Universal Battery Backup WH Housing	Dual 120V/277V	Green/White	
LED DIECAST EXIT SIGNS				
26D90	Diecast Exit Sign, Red Letters, Single Face, White Housing	Dual 120V/277V	Red/White	

Item Number	Item Description	Voltage	Lamp Watts
-------------	------------------	---------	------------

LED COMBO EXIT SIGNS



LED20723	Universal Combo Emergency Exit Sign White Housing w/ Red Lettering	Duel 120V/277 V	3
----------	--	-----------------	---



LED20784	Universal Combo Emergency Exit Sign White Housing w/ Red Lettering - Remote Capable	Duel 120V/277 V	3
----------	---	-----------------	---



LED20785	Universal Combo Emergency Exit Sign White Housing w/ Green Lettering - Remote Capable	Duel 120V/277 V	3
----------	---	-----------------	---



20786	Low Profile LED Combo Emergency Exit Sign, White Housing w Red Lettering	Duel 120V/277 V	1
-------	--	-----------------	---



20787	Low Profile LED Combo Emergency Exit Sign, White Housing w Green Lettering	Duel 120V/277 V	1
-------	--	-----------------	---

EXIT SIGN LED RETROFITS




20715	Red LED Candelabra Base Retrofit Kit, 2 Adapt	20V	.2
-------	---	-----	----



20716	Red Hardwire LED Kit 120 / 277V	120V/277V	1.2
-------	---------------------------------	-----------	-----



20717	Green LED Candelabra Base Retrofit Kit, 2 Adapt	120V	.7
-------	---	------	----



20718	Green Hardwire LED Kit 120 / 277V	120V/277V	.7
-------	-----------------------------------	-----------	----



20719	White LED Candelabra Base Retrofit Kit, 2 Adapt.	120V	1.7
-------	--	------	-----



20721	White Hardwire LED Kit 120 / 277V	120V/277V	1.8
-------	-----------------------------------	-----------	-----

BATTERIES



20730	NICD Battery 4.8V 650MAH	4.8V	N/A
-------	--------------------------	------	-----



20734	Lead Acid Battery 6V 4.5AH IN	6V	N/A
-------	-------------------------------	----	-----

WIRE GUARDS



STANDARDWG	Wire Guard for Exit and Emergency Lights	-	-
------------	--	---	---



COMBOWG	Combo Wire Guard	-	-
---------	------------------	---	---

Product info, right at your fingertips!

Now you can go Digital with TCP.



Our new Sales App is all about access and ease for our customers and distributors. Check inventory, inquire about availability, and learn more about our wide range of products right on your Smartphone.

Search for "TCP-Sales" in your favorite App Store, download the App today and get started immediately.

At TCP, We Know Light™.

TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For more information on the quality and care that TCP® can deliver, call us at
800.324.1496 or visit tcp.com

325 Campus Drive | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516