

# KH15Q Amber Mini Hampton Kitty Hawk Area, Wall, and Flood Light



<b>Project Information</b>	
Project Name: _____	Fixture Type: _____
Complete Catalog #: _____	Date: _____
Comments: _____	

The DuraGuard Amber Series KH15Q luminaire is available in two wattages with a wide choice of mounting configurations and an IES Type V distribution designed to replace HID lighting systems from 70w to 175w MH or HPS for wildlife or security applications requiring monochromatic AMBER light. LEDs operate between 585 and 595 nm, greater than 560nm required for wildlife protection. Typical applications include general area, parking, flood, security, and accent lighting for retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights from ground to 20 feet can be used based on light level and uniformity requirements.

### SPECIFICATIONS AND FEATURES:

#### HOUSING:

Die Cast Aluminum Housing and Front Frame, Integral Heat Sinking and Driver Compartment. Photocell Adaptable. Nickel-Plated Stainless Steel Hardware.

#### LISTING & RATINGS:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP66 Sealed LED Compartment.

#### FINISH:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

#### LENS:

Tempered Clear Flat Glass Lens

#### MOUNTING OPTIONS:

Mounts with Kitty Hawk Arm, Adjustable Slipfitter, 2 1/2" Diameter Mounting Arm Adapter, Yoke, Two-Piece Bracket, Easy Hang Wall Bracket, or Adjustable Knuckle (Factory Installed).

#### DURALED:

Aluminum Boards

#### WATTAGE:

22w: Array: 21.7w, System: 23.8w (Up to 100w HID Equivalent.)  
37w: Array: 37.2w, System: 43w (Up to 175w HID Equivalent.)



#### DRIVER:

Electronic Driver, 120-277V, 50/60Hz or 347V, 50/60Hz (37w Model Only); Less Than 20% THD and PF>0.90. Standard Internal Surge Protection is 2kV for 22w, 6kV for 37w. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

#### CONTROLS:

Fixtures Ordered with Factory-Installed Photocell or Motion Sensor Controls are Internally Wired for Switching and/or 1-10V Dimming Within the Housing. Remote Direct Wired Interface of 1-10V Dimming is Not Implied and May Not Be Available, Please Consult Factory. Fixtures are Tested with DuraGuard Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

#### WARRANTY:

5-Year Warranty for -40°C to +50°C Environment.

See Page 3 for Projected Lumen Maintenance Table.



Shown with "KH25A" Kitty Hawk Arm Mounting Option.




Shown with "KHEH" Easy-Hang Wall Bracket



Shown with "SSF" Slipfitter Option.

#### Dimensions

Width (D)	9 1/2" (240mm)
Length (B)	11 1/4" (299mm)
Height (A)	3 3/8" (92mm)



#### Length with Mount (L)

- Kitty Hawk Arm (KH25A):** 16" (406mm)
- Slipfitter (SSF):** 15 1/2" (394mm)
- Mounting Arm Adaptor (ALMAA):** 16" (406mm)
- Yoke (KH15Y):** 14 3/4" (375mm)
- Bracket (SSB):** 15 1/2" (394mm)
- Easy-Hang Wall Bracket (KHEH):** 12 3/4" (324mm)
- Knuckle (KN):** 17 1/4" (450mm)

### DuraLED TECHNOLOGY

Complete Units  
Ordering Information  
Example: KH15QF1X37UAMCZKH25ASP

## KH15Q Amber Mini Hampton Kitty Hawk Area, Wall, and Flood Light

# DuraLED Amber Series

KH15Q	F			AM	C			
Model	Optics/Beams	Wattage	Driver	CCT	Lens	Color	Mounting	Options
<b>KH15Q</b> = Amber Mini Hampton Kitty Hawk Area, Wall, and Flood Light		<b>1X22</b> =22w <b>1X37</b> =37w	<b>U</b> =120-277V <b>C</b> =347V*  *37w Model Only.	<b>AM</b> =Amber	<b>C</b> =Standard Clear Flat Glass Lens	<b>Z</b> =Bronze <b>C</b> =Custom (Consult Factory)		
	<b>F</b> =Type V/NEMA 7H x 7V  See Page 3 for Distribution Information.					<b>KH25A</b> =Kitty Hawk Arm <b>SSF</b> = Slipfitter <b>ALMAA</b> = Mounting Arm Adapter <b>KH15Y</b> =Yoke <b>SSB</b> =Two-Piece Swivel Bracket <b>KHEH</b> =Easy-Hang Wall Bracket <b>KN</b> =1/2" NPS Knuckle <b>NM</b> =No Mount		
						<b>SF</b> =Single Fuse* <b>DF</b> =Double Fuse* <b>SP</b> =Surge Protection <b>M1</b> =Motion Sensor, IR for mounting heights of 20ft to 35ft <b>M2</b> =Motion Sensor, IR for mounting heights of 18ft or less <b>PC3</b> =Photocell, 120-277VAC <b>P10</b> =Pencil Photocell, 120VAC <b>P12</b> =Pencil Photocell, 277VAC <b>P14</b> =Pencil Photocell, 120-277VAC		

\*120-277V Models Only.

Specifications subject to change without notice.



# KH15Q Amber Mini Hampton Kitty Hawk Area, Wall, and Flood Light



## ADDITIONAL MOUNTING OPTIONS



**KH15Q Shown with "KH25A" Kitty Hawk Mounting Arm,**  
Kitty Hawk Die-Cast Mounting Arm, Bronze Powdercoat Finish, Includes Hardware. Mounts Directly to Square Poles.



**KH15Q Shown with "ALMAA" Pole Mounting Arm Adaptor,**  
Die-Cast Adaptor for 2 1/2" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.



**KH15Q Shown with "KH15Y" Yoke,**  
Stamped Heavy-Duty Steel Yoke, Bronze Powdercoat Finish, Includes Hardware.



**KH15Q Shown with "SSF" External Mount Slipfitter,**  
External Mount Die-Cast Adjustable Slipfitter for 2 1/2" Tenons, Bronze Powdercoat Finish, Includes Hardware.



**KH15Q Shown with "SSB" Two-Piece Swivel Bracket,**  
Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.






**KH15Q Shown with "KHEH" Easy-Hang Wall Bracket,**  
Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.






**KH15Q Shown with "KN" Knuckle,**  
Die-Cast Adjustable Knuckle with 1/2" NPS Threads, Bronze Powdercoat Finish.

## EPA (EFFECTIVE PROJECTED AREA) SHOWN WITH SLIPFITTER MOUNTING

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 1	0.35	11 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 2@180° Mount	0.70	22 Lbs
 2@90° Mount	0.48	22 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 3@90° Mount	0.77	33 Lbs
 3@120° Mount	0.70	33 Lbs

Configuration	EPA (Sq. Ft.)	Weight (Lbs.)
 4@90° Mount	0.77	44 Lbs

## ACCESSORIES & REPLACEMENT PARTS:



Mounting Accessories (Order Separately, Field Installed)	
KH20RPZ	Die-Cast Adaptor for 3" to 4" Round Poles, Bronze Powdercoat Finish. Use with KH25A Kitty Hawk Mounting Arm only.
KH20WMZ	Die-Cast Wall Mount Adaptor, Bronze Powdercoat Finish. Use with KH25A Kitty Hawk Mounting Arm only.
PTSB1SZ	Single Pole Tenon Spoke Bracket, 2 1/2" Horizontal Mounting Arm, Bronze Powdercoat Finish, Includes Hardware.
PTSB290SZ	Twin Pole Tenon Spoke Bracket, 2 1/2" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB2180SZ	Twin Pole Tenon Spoke Bracket, 2 1/2" Horizontal 180° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB390SZ*	Triple Pole Tenon Spoke Bracket, 2 1/2" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB3120SZ*	Triple Pole Tenon Spoke Bracket, 2 1/2" Horizontal 120° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
PTSB490SZ*	Quad Pole Tenon Spoke Bracket, 2 1/2" Horizontal 90° Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.

\*Non-stock item. Consult factory for lead time.

Accessories (Order Separately, Field Installed)	
ACCHSG1Z	Die Cast Accessory Housing for Installing Sensors or Other Lighting Control, Bronze Powdercoat Finish.
KH15GSZ	Aluminum Glare/House Side Shield, Bronze Powdercoat Finish, Includes Hardware.
KH15WG	Wire Guard, Stainless Steel Construction, Includes Hardware.
KH15BFZ	Baffle, Aluminum with Bronze Powdercoat Finish

Replacement Parts (Order Separately, Field Installed)	
KH15GL	Tempered Clear Flat Glass Lens.
KH25AZ	Kitty Hawk Die-Cast Mounting Arm, Includes Hardware. Mounts Directly to Square Poles.
SSFZ	External Mount Die-Cast Adjustable Slipfitter for 2 1/2" Tenons, Bronze Powdercoat Finish, Includes Hardware.
ALMAAZ	Die-Cast Adaptor for 2 1/2" Horizontal Mounting Arms, Bronze Powdercoat Finish, Includes Hardware.
KH15YZ	Stamped Heavy-Duty Steel Yoke, Bronze Powdercoat Finish, Includes Hardware.
SSBZ	Two-Piece Stamped Steel Adjustable Bracket, Bronze Powdercoat Finish, Includes Hardware.
KHEHZ	Die-Cast Easy-Hang Wall Bracket, Bronze Powdercoat Finish, Includes Hardware.
FLSTZ	Die-Cast Adjustable Knuckle with 1/2" NPS Threads, Bronze Powdercoat Finish.
P18103	120-277VAC Photocell
P18110	110-130V 120VAC Pencil Photocell
P18112	208-277V 240VAC Pencil Photocell
P18114	120-277V, 50/60Hz Pencil Photocell

Specifications subject to change without notice.

# KH15Q Amber Mini Hampton Kitty Hawk Area, Wall, and Flood Light



## PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Amber LEDs				
				Lumens	LPW	B	U	G
DuraLED 22w	525	25	Type V	1,159	46	1	1	0
DuraLED 37w	525	38	Type V	1,738	46	1	2	0

LED Board Watts	Drive Current (mA)	Input Watts	Beam	Amber LEDs	
				Lumens	LPW
DuraLED 22w	525	25	F 110H x 110V, NEMA 7H x 7V	1,149	46
DuraLED 37w	525	38	F 110H x 110V, NEMA 7H x 7V	1,724	45


## PROJECTED LUMEN MAINTENANCE

Data shown for Amber LEDs		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 38w	1.00	0.98	0.95	0.91	320,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.95	0.89	0.79	141,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.96	0.93	0.85	134,000


### NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.

## PHOTOMETRIC DATA

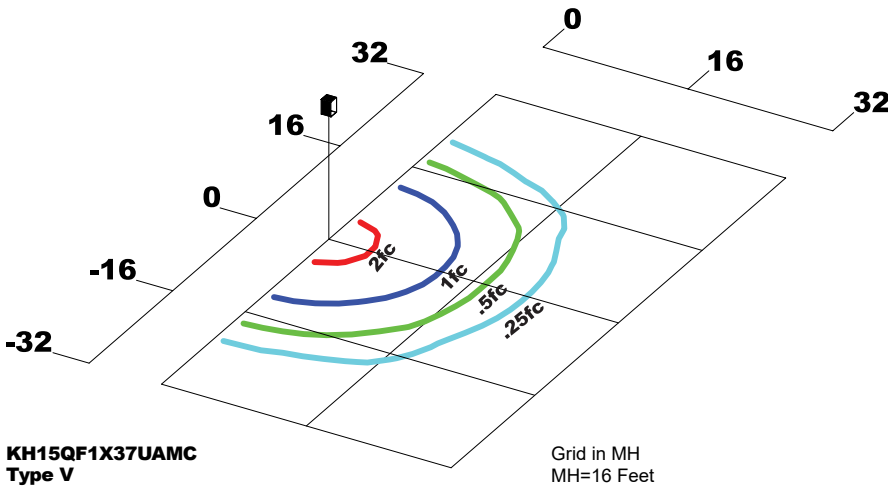

**KH15QF1X37UAMC**  
Type V

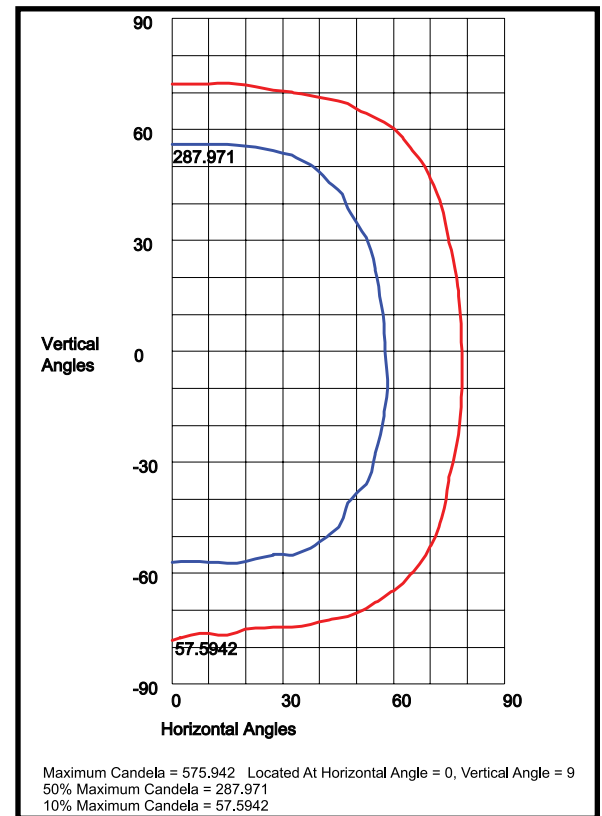

**KH15QF1X37UAMC**  
110H x 110V, NEMA 7H x 7V

