

PARKING GARAGE SOLUTIONS



VGS40 DuraLED Garage Square



Uniform low glare controlled lighting for floors, ceiling and walls for increased visibility and security.



VGS40QF1X60 • Center of Standard 30ft X 60ft Parking Bay • 3.0 FTC AVG, 7.3 FTC MAX, 1.5 FTC MIN, 2.3:1 AVG/MIN, 4.9:1 MAX/MIN

Fixture:

Die Cast Aluminum Housing, Powdercoat Finish, UV-Stabilized Polycarbonate Lens.

Wattage:

40w Array: 37w, System: 40w; (Up to 100w HID Equivalent)

60w Array: 53w, System: 60w; (Up to 175w HID Equivalent)

84w Array: 74w, System: 84w; (Up to 175w HID Equivalent)

Listing & Ratings:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750. IP66 Sealed LED Compartment.

Controls & Options:

Motion Sensors, Surge Protection, Fuses, Battery Backup

MODEL VGS40QF LED Garage Square with Type VS Optic

WATTAGES 1x40w, 1x60w, 1x84w


DRIVER 120-277v (U), 347-480v (H)

CCT 4000K (4K)

COLOR Bronze (Z) or Custom Color - Consult Factory

MOUNTING Easy-Hang Bracket, Trunnion & Pendant Mount

OPTIONS See Specification Page for Options.



Easy Hang Mount



Trunnion



Pendant

Mounting Options

12802 Commodity Place
Tampa, FL 33626



Toll Free: (800) 736-7991
Fax: (800) 287-4175

www.duraguard.com


VGS40 Highly Uniform Performance Optics

TYPICAL GARAGE LAYOUT

30ft X 60ft Bay; 9ft Mounting Height

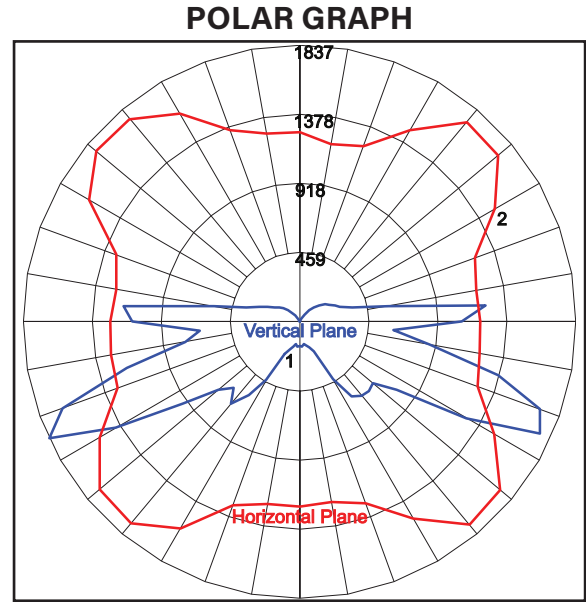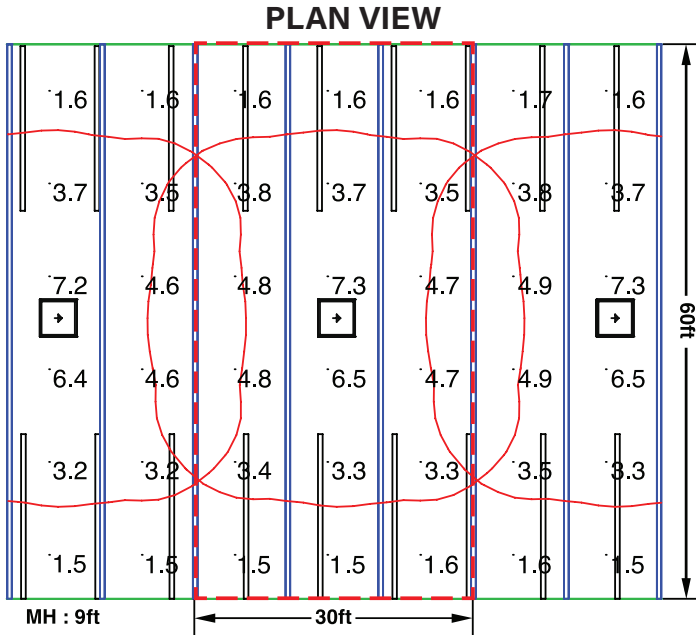

- Horizontal Max Candela above normal viewing angle when driving.
- Square Type 5 pattern creates better uniformity.

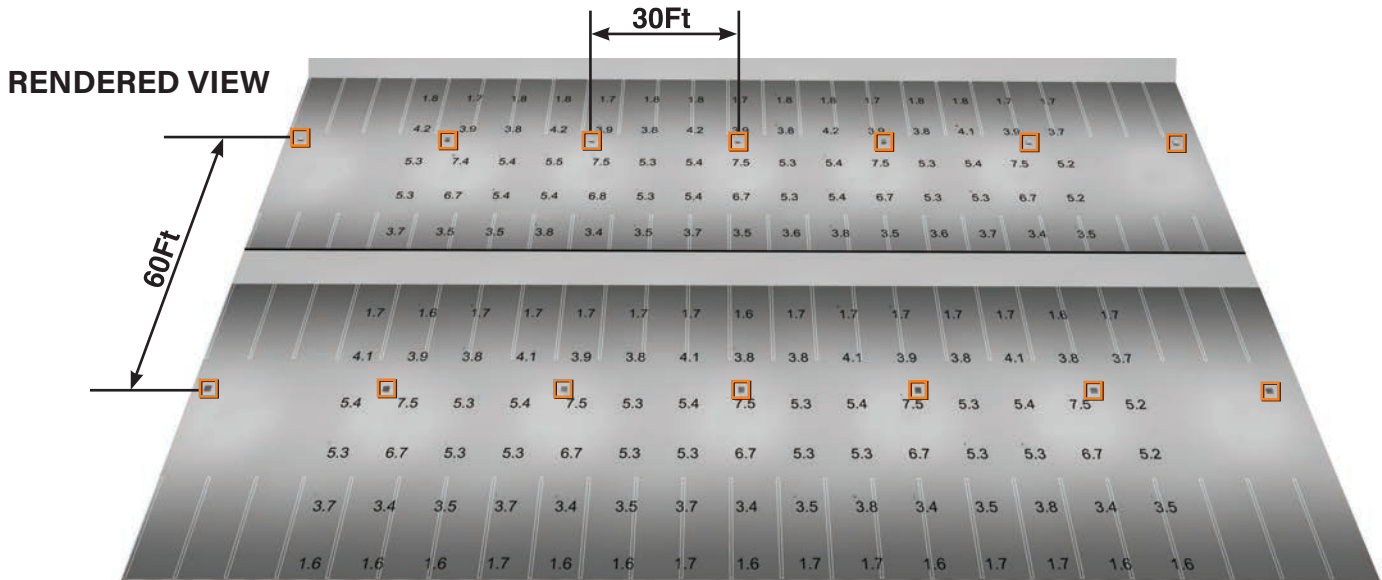

VGS40QF1X60 3.0 FTC AVG, 7.3 FTC MAX, 1.5 FTC MIN, 2.3:1 AVG/MIN, 4.9:1 MAX/MIN
Exceeds IES RP-20-98 of 1.0 FTC MIN and MAX/MIN of 10:1