

LV2AQ DuraLED 24" Linear LED Die Cast



Project Information	
Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

The DuraGuard LV2A series wall, pendant and ceiling mount luminaire is available with clear or LumaLens lenses and open door frame designed to replace HID lighting systems from 175w to 250w MH or HPS. Typical lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 25 feet can be used based on light level and uniformity requirements.

SPECIFICATIONS AND FEATURES:

HOUSING:

Heavy-Duty Die Cast Aluminum Housing and Top Frame. Can Be Tapped for Side Conduit Entry.

LISTING & RATINGS:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP66 Sealed LED Compartment.
ADA Compliant (Without Brackets)

FINISH:

Gray Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

LENS:


Clear UV-Stabilized Polycarbonate or SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens

MOUNTING OPTIONS:

Surface Mount or Use Optional Stainless Steel Quick-Mount Bracket, Adjustable Bracket, or Yoke.

DURALED LED:

Aluminum Boards



WATTAGE:

47 Watt: Array: 47w, System: 57.8w (175w HID Equivalent)
66 Watt: Array: 66w, System: 77.3w (250w HID Equivalent)

DRIVER:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV, 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

WARRANTY:

5-Year Warranty for -40°C to +50°C Environment.


See Page 2 for Projected Lumen Maintenance Table.



LV2AQ



Shown with LumaLens

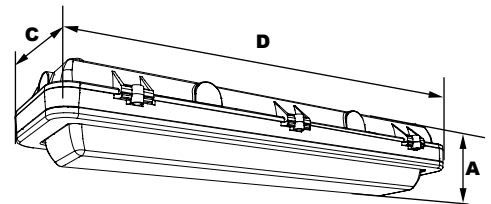

Dimensions

Width (D)	24 1/8" (614mm)
Length (C)	7" (178mm)
Height (A)	4" (102mm)

DuraLED TECHNOLOGY

Complete Units
Ordering Information
Example: LV2AQOF66U5KCGSP

LV2AQ DuraLED 24" Linear LED Die Cast

LV2AQ	F						
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
LV2AQ=DuraLED Open Frame 24" Linear LED Die Cast	F=Wide	47=47w 66=66w	U=120-277V H=347-480V	4K=4000K 5K=5000K		G=Gray P=Platinum C=Custom (Consult Factory)	
		C=Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens					

SF=Single Fuse*
DF=Double Fuse*
SP=Surge Protection
BU=Battery Backup*
BUC=Cold Start Battery Backup, -20°C, 90 Minutes*


*120-277V Models Only.



LV2AQ DuraLED 24" Linear LED Die Cast



ACCESSORIES & REPLACEMENT PARTS:

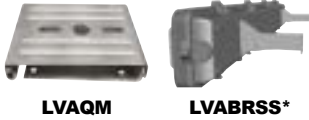

Mounting Accessories (Order Separately, Field Installed)	
LVAQM	Stainless Steel Quick Mount Bracket
LVABRSS	Stainless Steel Adjustable Bracket, Set of Two
LV2AYSS	Stainless Steel Yoke for LV2A, Includes Hardware.



LV2AYSS

*Shown Mounted

Replacement Parts (Order Separately, Field Installed)	
LV2ALL	SoftLED LumaLens Opal UV-Stabilized Polycarbonate Vandal-Resistant Lens
LV2APC	Clear UV-Stabilized Polycarbonate Vandal-Resistant Lens

For Replacement Battery Backup, see the DuraGuard LED Battery Backup Specification Sheet.

PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Spacing Criteria	5000 CCT 80 CRI		4000 CCT 80 CRI	
					Lumens	LPW	Lumens	LPW
DuraLED 47w (Clear Lens)	116	58	Open Frame (100° x 100°)	1.22	7,309	126	7,017	121
DuraLED 47w (LumaLens)			Open Frame (110° x 130°)	1.30	5,932	102	5,695	98
DuraLED 66w (Clear Lens)	77	77	Open Frame (100° x 100°)	1.22	10,294	134	9,882	128
DuraLED 66w (LumaLens)			Open Frame (110° x 130°)	1.30	8,356	109	8,021	104


PROJECTED LUMEN MAINTENANCE

Data shown for 5000 CCT		Compare to MH				
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	All wattages up to and including 77w	1.00	0.95	0.89	0.78	138,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.86	0.72	0.43	53,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.92	0.84	0.68	62,000


NOTES:

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.

PHOTOMETRIC DATA

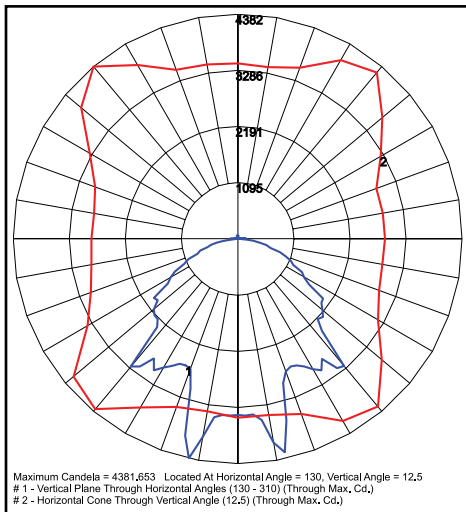

LV2AQF66U5KC
Wide Optic

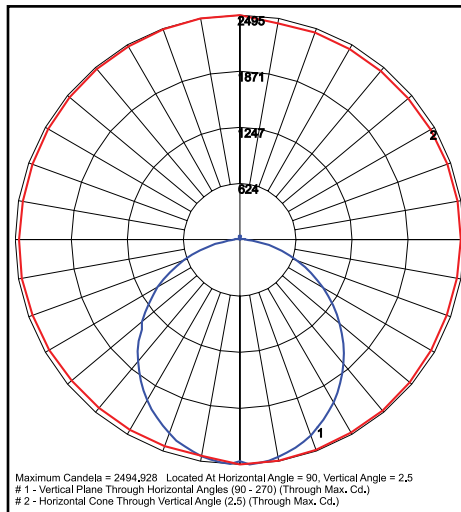

LV2AQF66U5KL
Wide Optic