

STP10Q LED Step Light



Project Information	
Project Name:	Fixture Type:
Complete Catalog #:	Date:
Comments:	

The DuraGuard LED STP10Q Step Light provides fully shielded lighting for outdoor path, walkways and landscape areas. Optics are designed to replace outdated Halogen and Compact Fluorescent lighting systems. These fixtures are ideal for retail centers, restaurants, hotels, schools and universities, public transit and airports, office buildings and medical facilities.

SPECIFICATIONS AND FEATURES:

HOUSING:

Die-Cast Aluminum Housing and Heatsink.

LISTING & RATINGS:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750
IP66 Sealed LED Compartment.

FINISH:

Textured Black, Bronze, or White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

LENS:

Frosted Tempered Glass Array Lens

MOUNTING OPTIONS:

Mounts to Standard Single Gang Junctions Box with (2) 1½" – 6-32 Philips Bevel Head Stainless Steel Screws.

LED:

Aluminum Boards

WATTAGE:

Array: 4w, System: 3.2w

DRIVER:

On-Board Electronic Driver, 120V, 50/60Hz; Less Than 20% THD and PF>0.90.

WARRANTY:

2-Year Warranty for -20°C to +40°C Environment.



Black




Bronze



White

Dimensions

Width (A)	5" (127mm)
Height (B)	3" (78mm)
Depth (C)	1¼" (45mm)

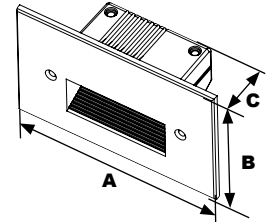

Complete Units Ordering Information
Example: **STP10QF1X41204KB**

STP10Q LED Step Light

STP10Q	F	1X4	120	4K	
Model	Optic	Wattage	Driver	CCT	Color
STP10Q= LED Step Light	F=Type V	1X4=4w	120=120V	4K=4000K	Z=Bronze B=Black W=White C=Custom (Consult Factory)




STP10Q LED Step Light




PHOTOMETRIC PERFORMANCE

		4000 CCT 80 CRI				
LED Board Watts	Input Watts	Optic	Lumens	B	U	G
LED 4w	3.2	Type V	12	0	0	0

PHOTOMETRIC DATA

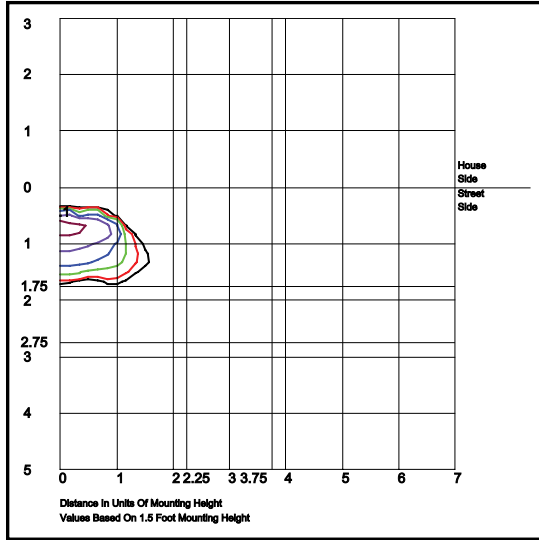

STP10QF1X41204K
Type V
Mounted 18" Above Floor

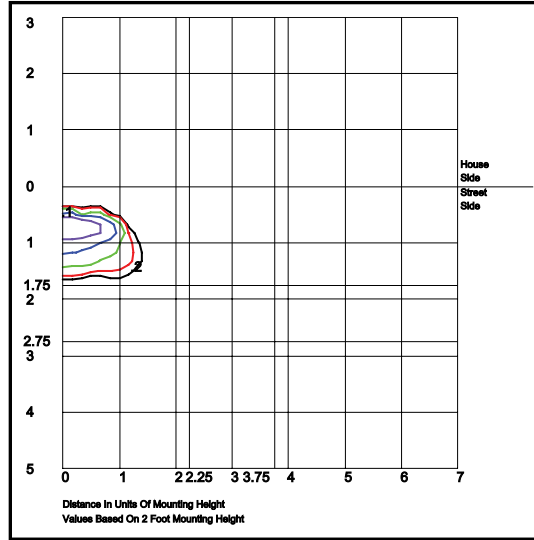

STP10QF1X41204K
Type V
Mounted 24" Above Floor