

# CP16Q DuraLED 16" Recessed Gas Station Canopy



<b>Project Information</b>	
Project Name: _____	Fixture Type: _____
Complete Catalog #: _____	Date: _____
Comments: _____	

The DuraGuard CP16Q 16" Recessed Gas Station Canopy luminaire with mounting system designed for typical canopy steel pan structures is available with an optical distribution designed to replace HID lighting systems up to 250w MH or HPS. The fixture housing is designed to emulate legacy HID canopy lights that mount through a 4" minimum diameter cut hole in the canopy. A galvanized steel back plate is provided to allow for installation over larger holes. Driver and power connection are made in an IP66 rated powder coated die cast mounting box above the canopy. Mounting heights of 12 to 20 feet can be used based on light level and uniformity requirements.

**SPECIFICATIONS AND FEATURES:**

**HOUSING:**

Die Cast Aluminum Housing with IP66 Driver Compartment.

**LISTING & RATINGS:**

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP66 Sealed LED Compartment.

**FINISH:**

White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

**LENS:**


Tempered Clear Flat Glass Lens

**MOUNTING OPTIONS:**

Recessed Mount

**DURALED LED:**

Aluminum Boards



**WATTAGE:**

Array: 111.5w; System: 127w (250w HID Equivalent)


**DRIVER:**

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

**WARRANTY:**

5-Year Warranty for -40°C to +50°C Environment.

See Page 2 for Projected Lumen Maintenance Table.

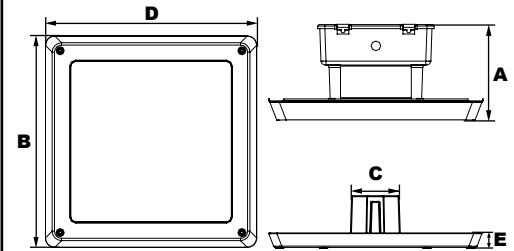

**Dimensions**

<b>Width (D)</b>	16½" (419mm)	<b>Height 1 (A)</b>	7¼" (195mm)
<b>Length (B)</b>	16½" (419mm)	<b>Width (C)</b>	4" (102mm)
		<b>Height 2 (E)</b>	1¼" (32mm)

**DuraLED TECHNOLOGY**

Complete Units Ordering Information  
Example: **CP16QF1X112U5KCWSP**

## CP16Q DuraLED 16" Recessed Gas Station Canopy

CP16Q	F	1X112				C		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options	
CP16Q = DuraLED 16" Recessed Gas Station Canopy	F=Type V	1X112=112w	U=120-277V H=347-480V	4K=4000K 5K=5000K	C=Tempered Clear Flat Glass	W=White C=Custom (Consult Factory)	SF=Single Fuse* DF=Double Fuse* SP=Surge Protection *120-277V Only	



DesignLights Consortium™  
Qualified Luminaires:  
CP16QF1X112[U H]5KC\*\*



Specifications subject to change without notice.

# CP16Q DuraLED 16" Recessed Gas Station Canopy



## PHOTOMETRIC PERFORMANCE

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
DuraLED 112w	116	127	Type V	17,904	141	3	2	2	17,188	135	3	2	1


## PROJECTED LUMEN MAINTENANCE

Data shown for 5000 CCT TM-21-11	Input Watts	Compare to MH				
		Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated LED Life
L70 Lumen Maintenance @ 25°C / 77°F	127	1.00	0.96	0.92	0.84	187,000
L70 Lumen Maintenance @ 50°C / 122°F		1.00	0.93	0.87	0.73	113,000
L80 Lumen Maintenance @ 40°C / 104°F		1.00	0.94	0.89	0.77	88,000

**NOTES:**

1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.

## PHOTOMETRIC DATA

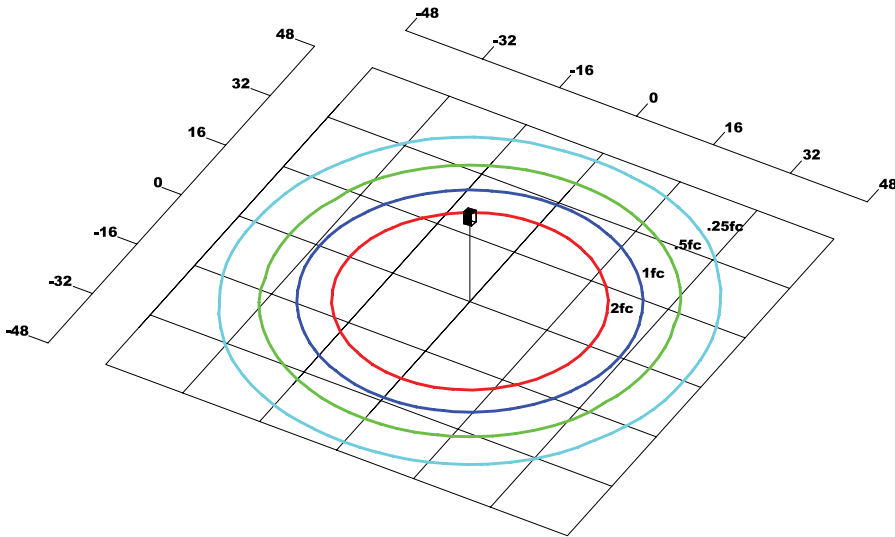


**CP16QF1X112U5KC**

**Type V**

Grid in MH

MH=16 Feet

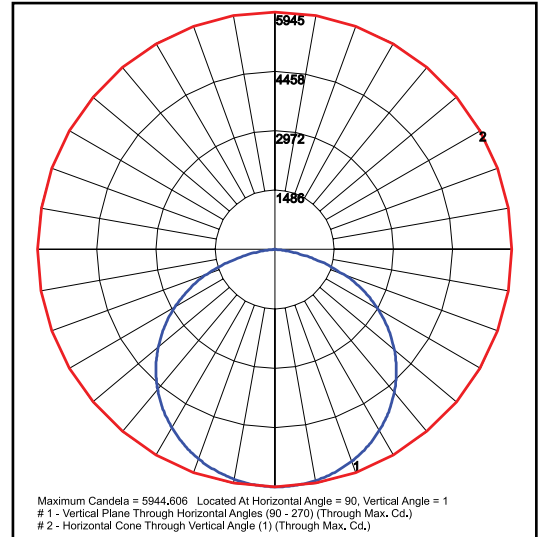

Maximum Candela = 5944.606 Located At Horizontal Angle = 90, Vertical Angle = 1  
 # 1 - Vertical Plane Through Horizontal Angles (90 - 270) (Through Max. Cd.)  
 # 2 - Horizontal Cone Through Vertical Angle (1) (Through Max. Cd.)

**CP16QF1X112U5KC**

**Type V**