

CP20Q DuraLED 20" Recessed Gas Station Canopy



Project Information	
Project Name: _____	Fixture Type: _____
Complete Catalog #: _____	Date: _____
Comments: _____	

The DuraGuard CP20Q 20" Recessed Gas Station Canopy luminaire with mounting system designed for typical canopy steel pan structures is available with an optical distribution designed to replace HID lighting systems up to 400w MH or HPS. The fixture housing is designed to emulate legacy HID canopy lights that mount through a 4" minimum diameter cut hole in the canopy. A galvanized steel back plate is provided to allow for installation over larger holes. Driver and power connection are made in an IP66 rated powder coated die cast mounting box above the canopy. Mounting heights of 12 to 20 feet can be used based on light level and uniformity requirements.

SPECIFICATIONS AND FEATURES:

HOUSING:

Die Cast Aluminum Housing with IP66 Driver Compartment.

DURALED LED:

Aluminum Boards



WATTAGE:

Array: 185.9w; System: 206w (400w HID Equivalent)

LISTING & RATINGS:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP66 Sealed LED Compartment.

DRIVER:

Electronic Driver, 120-277V, 50/60Hz or 347-480V, 50/60Hz; Less Than 20% THD and PF>0.90. Standard Internal Surge Protection 6kV. 0-10V Dimming Standard for a Dimming Range of 100% to 10%; Dimming Source Current is 150 Microamps.

FINISH:

White Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

LENS:

Tempered Clear Flat Glass Lens



WARRANTY:

5-Year Warranty for -40°C to +50°C Environment.

MOUNTING OPTIONS:

Recessed Mount

See Page 2 for Projected Lumen Maintenance Table.

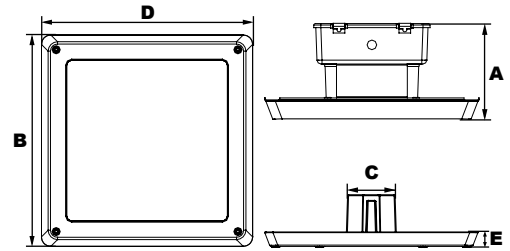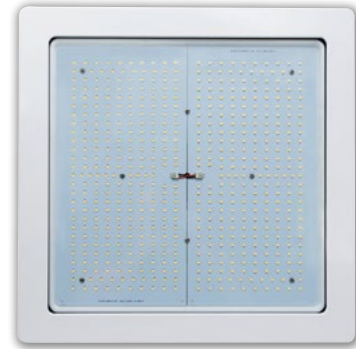

Dimensions

Width (D)	19 1/2" (505mm)	Height 1 (A)	7 3/4" (195mm)
Length (B)	19 1/2" (505mm)	Width (C)	4" (102mm)
		Height 2 (E)	1 1/4" (32mm)

DuraLED TECHNOLOGY

Complete Units Ordering Information
Example: **CP20QF1X186U5KCWSP**

CP20Q DuraLED 20" Recessed Gas Station Canopy

CP20Q	F	1X186		5K	C		
Model	Optics	Wattage	Driver	CCT	Lens	Color	Options
CP20Q = DuraLED 20" Recessed Gas Station Canopy	F=Type V	1X186=186w	U=120-277V H=347-480V	5K=5000K	C=Tempered Clear Flat Glass	W=White C=Custom (Consult Factory)	SF=Single Fuse* DF=Double Fuse* SP=Surge Protection *120-277V Only



DesignLights Consortium™
Qualified Luminaires:
CP20QF1X186[U H]5KC**



Specifications subject to change without notice.

CP20Q DuraLED 20" Recessed Gas Station Canopy



PHOTOMETRIC PERFORMANCE


LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI				
				Lumens	LPW	B	U	G
DuraLED 186w	116	206	Type V	29,677	144	4	2	2

PROJECTED LUMEN MAINTENANCE


Data shown for 5000 CCT	Compare to MH					
	TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs
L70 Lumen Maintenance @ 25°C / 77°F	206	1.00	0.96	0.91	0.82	169,000
L70 Lumen Maintenance @ 50°C / 122°F	206	1.00	0.92	0.85	0.69	98,000
L80 Lumen Maintenance @ 40°C / 104°F	206	1.00	0.93	0.87	0.73	75,000

- NOTES:**
1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
 2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.

PHOTOMETRIC DATA

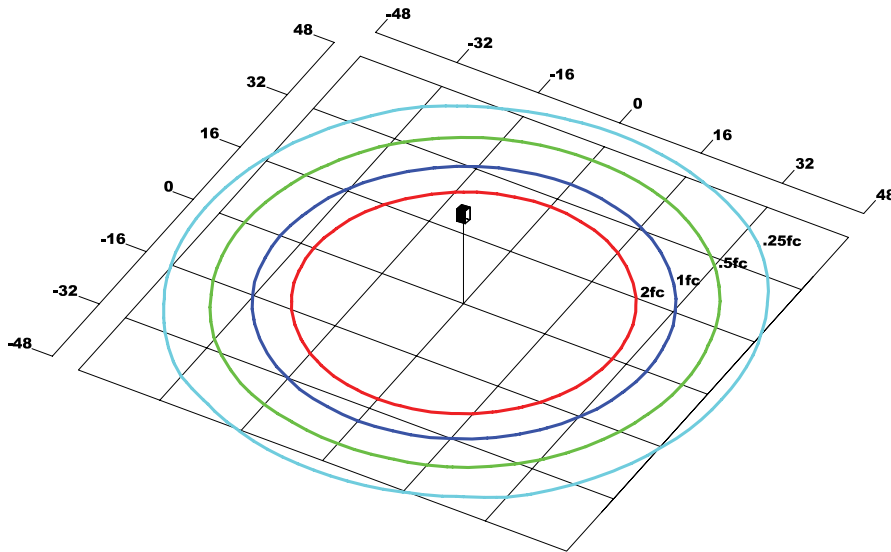

CP20QF1X186U5KC
Type V
 Grid in MH
 MH=16 Feet

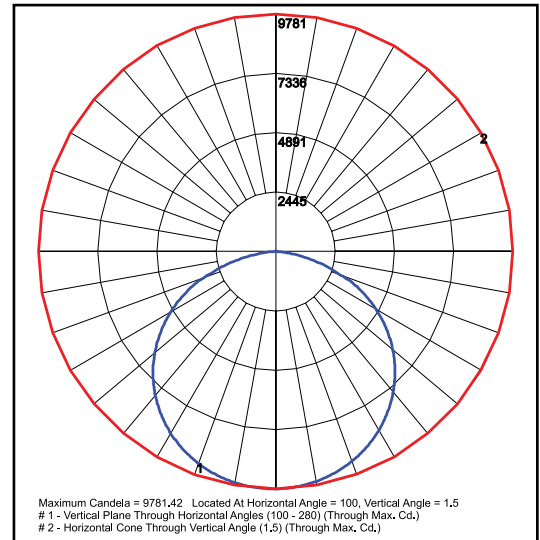

CP20QF1X186U5KC
Type V