

WP7Q DuraLED Polycarbonate Entry Light



Project Information	
Project Name: _____	Fixture Type: _____
Complete Catalog #: _____	Date: _____
Comments: _____	

The DuraGuard WP7Q general purpose entry light luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems up to 70w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings, apartment complexes and medical facilities. Mounting heights of 8 to 12 feet can be used based on light level and uniformity requirements.

SPECIFICATIONS AND FEATURES:

HOUSING:

Die Cast Back Plate with White Powdercoat Finish. Molded UV-Stabilized Polycarbonate Front Housing. 120-277V Photocell Included.

LISTING & RATINGS:

CSA: Listed for Wet Locations, ANSI/UL 1598, 8750 IP65 Sealed LED Compartment. ADA Compliant

FINISH:

UV-Stabilized Polycarbonate Front Housing in Black with White Powdercoat Finish Back Plate.

LENS:

SoftLED LumaLens UV-Stabilized Polycarbonate Opal Vandal-Resistant Lens Eliminates LED Hot Spots

MOUNTING OPTIONS:

Mount Directly Over a 4" Recessed Outlet Box.

DURALED LED:

Aluminum Boards

WATTAGE:

Array: 11w; System: 13.8w; (70w HID Equivalent)

DRIVER:



Electronic Driver, 120-277V, 50/60Hz, Non-Dimmable

CONTROLS:

Factory-Installed Photocell is Internally Wired for Switching Within the Housing. Fixtures are Tested with DuraGuard Controls and May Not Function Properly With Controls Supplied By Others. Fixtures are NOT Designed for Use with Line Voltage Dimmers.

WARRANTY:

5-Year Warranty for -40°C to +40°C Environment.

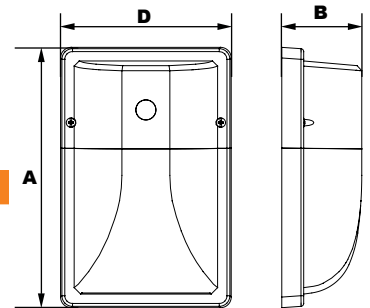

Dimensions

Width (D)	5 1/4" (136mm)
Length (B)	2 1/2" (64mm)
Height (A)	8 1/4" (207mm)

DuraLED TECHNOLOGY

Complete Units
Ordering Information
Example: WP7QF1X11U5KLB

WP7Q DuraLED Polycarbonate Entry Light

WP7Q	F	1X11	U		L	B
Model	Optics	Wattage	Driver	CCT	Color	Color
WP7Q= DuraLED Polycarbonate Entry Light	F=Type IV	1X11=11w	U=120-277V	4K=4000K 5K=5000K	L=SoftLED LumaLens Opal UV-Stabilized Polycarbonate Outer Conical Lens	B=Black



Specifications subject to change without notice.

WP7Q DuraLED Polycarbonate Entry Light



PHOTOMETRIC PERFORMANCE

5000 CCT 80 CRI

LED Board Watts	Drive Current (mA)	Input Watts	Optics	Lumens	B	U	G
DuraLED 11w	170	14	Type IV	1490	0	3	2

PHOTOMETRIC DATA

