

## Technical data sheet

### Polarized retro-reflective photoelectric sensor set

Part no.: 50138506

Set PRK5.R3/2N-M8 DTKS 30x50



#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Further information
- Accessories



## Technical data

### Basic data

|                     |                                 |
|---------------------|---------------------------------|
| Series              | 5                               |
| Operating principle | Reflection principle            |
| Contains            | Reflector DTKS 30x50 (50136770) |
| Application         | Detection of empty bottles      |

### Special version

|                 |             |
|-----------------|-------------|
| Special version | Article set |
|-----------------|-------------|

### Optical data

|                          |  |
|--------------------------|--|
| Operating range          | Guaranteed operating range               |
| Operating range          | 0.1 ... 0.3 m, With reflector DTKS 30x50 |
| Operating range limit    | Typical operating range                  |
| Operating range limit    | 0.1 ... 0.3 m, With reflector DTKS 30x50 |
| Light source             | LED, Red                                 |
| Wavelength               | 620 nm                                   |
| Transmitted-signal shape | Pulsed                                   |
| LED group                | Exempt group (in acc. with EN 62471)     |

### Electrical data

#### Performance data

|                      |  |
|----------------------|--|
| Supply voltage $U_B$ | 10 ... 30 V, DC, Incl. residual ripple |
| Residual ripple      | 0 ... 15 %, From $U_B$                 |
| Open-circuit current | 0 ... 20 mA                            |

#### Outputs

|                                     |            |
|-------------------------------------|------------|
| Number of digital switching outputs | 2 Piece(s) |
|-------------------------------------|------------|

#### Switching outputs

|                         |   |
|-------------------------|---|
| Voltage type            | DC  |
| Switching current, max. | 100 mA  |
| Switching voltage       | high: $\geq(U_B - 2.5V)$<br>low: $\leq 2.5 V$ |

#### Switching output 1

|                     |                     |
|---------------------|---------------------|
| Assignment          | Connection 1, pin 4 |
| Switching element   | Transistor, NPN     |
| Switching principle | Light switching     |

#### Switching output 2

|                     |                     |
|---------------------|---------------------|
| Assignment          | Connection 1, pin 2 |
| Switching element   | Transistor, NPN     |
| Switching principle | Dark switching      |

### Time behavior

|                     |        |
|---------------------|--------|
| Switching frequency | 500 Hz |
| Response time       | 1 ms   |
| Readiness delay     | 300 ms |

### Connection 1

|                    |                              |
|--------------------|------------------------------|
| Function           | Signal OUT<br>Voltage supply |
| Type of connection | Connector                    |
| Thread size        | M8                           |
| Type               | Male                         |
| Material           | Plastic                      |
| No. of pins        | 4 -pin                       |

### Mechanical data

|                       |                           |
|-----------------------|---------------------------|
| Dimension (W x H x L) | 14 mm x 32.5 mm x 20.2 mm |
| Housing material      | Plastic                   |
| Plastic housing       | ABS                       |
| Lens cover material   | Plastic                   |
| Net weight            | 70 g                      |
| Housing color         | Black<br>Red              |

### Operation and display

|                 |            |
|-----------------|------------|
| Type of display | LED        |
| Number of LEDs  | 2 Piece(s) |

### Environmental data

|                                |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -40 ... 60 °C |
| Ambient temperature, storage   | -40 ... 70 °C |

### Certifications


|                      |               |
|----------------------|---------------|
| Degree of protection | IP 67         |
| Protection class     | III           |
| Certifications       | c UL US       |
| Standards applied    | IEC 60947-5-2 |

### Classification

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| ECLASS 5.1.4          | 27270902 |
| ECLASS 8.0            | 27270902 |
| ECLASS 9.0            | 27270902 |
| ECLASS 10.0           | 27270902 |
| ECLASS 11.0           | 27270902 |
| ECLASS 12.0           | 27270902 |
| ECLASS 13.0           | 27270902 |
| ETIM 5.0              | EC002717 |
| ETIM 6.0              | EC002717 |
| ETIM 7.0              | EC002717 |
| ETIM 8.0              | EC002717 |

# Dimensioned drawings

All dimensions in millimeters

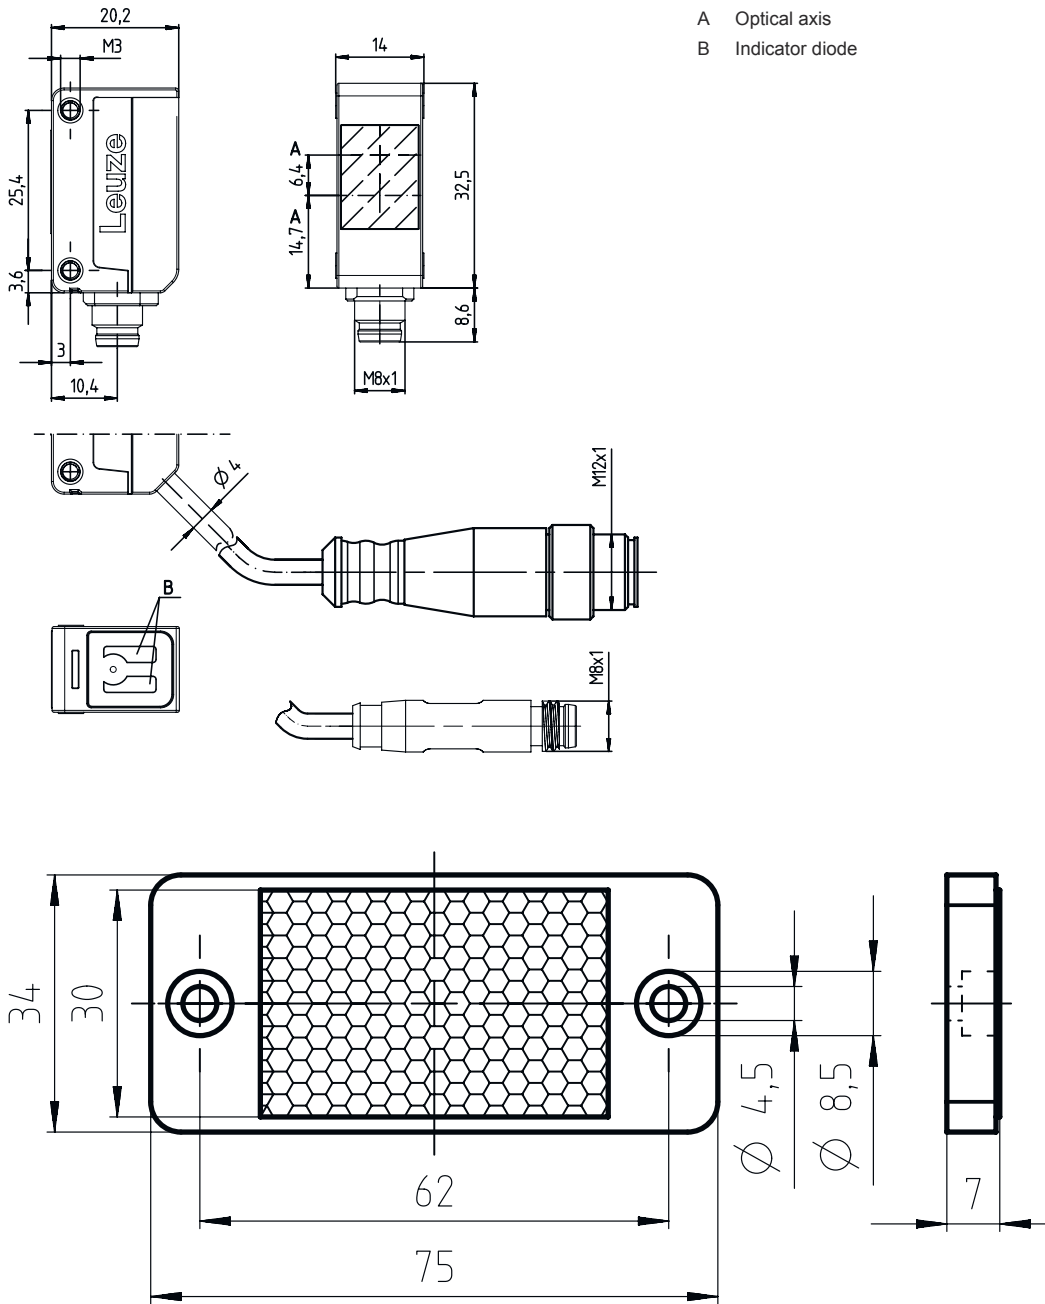


- A Optical axis
- B Indicator diode

# Electrical connection

## Connection 1


|                    |                |
|--------------------|----------------|
| Function           | Signal OUT     |
|                    | Voltage supply |
| Type of connection | Connector      |
| Thread size        | M8             |
| Type               | Male           |
| Material           | Plastic        |
| No. of pins        | 4 -pin         |

| Pin | Pin assignment |
|-----|----------------|
| 1   | V+             |
| 2   | OUT 2          |
| 3   | GND            |
| 4   | OUT 1          |





## Diagrams

### Typ. function reserve

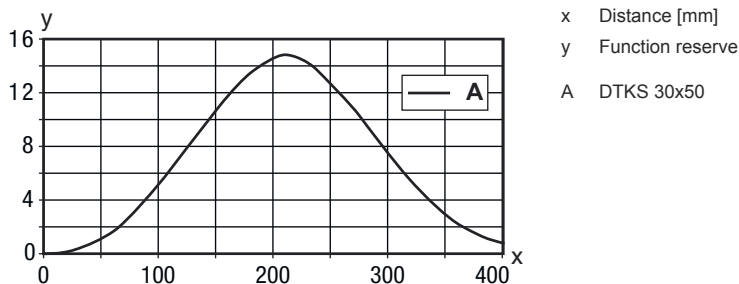

### Mounting

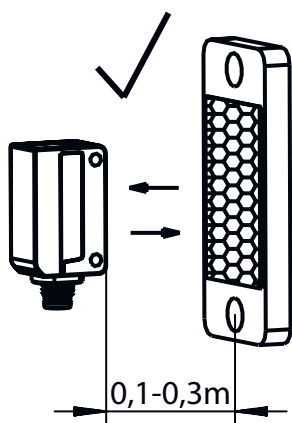

## Operation and display

| LED | Display                  | Meaning               |
|-----|--------------------------|-----------------------|
| 1   | Yellow, continuous light | Light path free       |
|     | Yellow, flashing         | No function reserve   |
| 2   | Green, continuous light  | Operational readiness |

## Part number code

Part designation: **AAA5d.EE/ ff-GG-hh-I**

|             |   |
|-------------|---|
| <b>AAA5</b> | <b>Operating principle / construction</b><br>HT5: diffuse reflection sensor with background suppression<br>LS5: throughbeam photoelectric sensor transmitter<br>LE5: throughbeam photoelectric sensor receiver<br>ET5: energetic diffuse reflection sensor<br>FT5: diffuse reflection sensor with fading<br>PRK5: retro-reflective photoelectric sensor with polarization filter  |
| <b>d</b>    | <b>Light type</b><br>n/a: red light<br>I: infrared light  |
| <b>EE</b>   | <b>Equipment</b><br>1: adjustable range<br>M: for semi-transparent objects<br>H: For the detection of transparent films<br>X: reinforced fading<br>3: teach-in via button<br>R: combination product for reflector DTKS 30x50  |
| <b>ff</b>   | <b>Switching output / function / OUT1OUT2 (OUT1 = pin 4, OUT2 = pin 2)</b><br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>X: pin not used<br>9: deactivation input (deactivation with high signal)<br>D: Deactivation input (deactivation with low signal)                        |
| <b>GG</b>   | <b>Version</b><br>P1: narrow light beam   |
| <b>hh</b>   | <b>Electrical connection</b><br>n/a: cable, standard length 2000 mm, 4-wire<br>M8: M8 connector, 4-pin (plug)<br>M8.3: M8 connector, 3-pin (plug)<br>200-M8: cable, length 200 mm with M8 connector, 4-pin, axial (plug)<br>200-M8.3: cable, length 200 mm with M8 connector, 3-pin, axial (plug)<br>200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug)<br>M8.1: Snap-in, M8 connector, 4-pin (plug) |
| <b>I</b>    | <b>Configuration</b><br>P1: different configuration   |

### Note



A list with all available device types can be found on the Leuze website at [www.leuze.com](http://www.leuze.com).

## Notes



### Observe intended use!



- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with its intended use.

## Notes

### For UL applications:



↳ Only for use in "class 2" circuits



↳ These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

## Further information



- Sum of the output currents for both outputs, 50 mA for ambient temperatures > 40 °C

## Accessories

### Connection technology - Connection cables

|   | Part no. | Designation       | Article          | Description   |
|---|----------|-------------------|------------------|---|
|   | 50130848 | KD U-M8-4A-V1-020 | Connection cable | Connection 1: Connector, M8, Axial, Female, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 2.000 mm<br>Sheathing material: PVC |
|  | 50130850 | KD U-M8-4A-V1-050 | Connection cable | Connection 1: Connector, M8, Axial, Female, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5.000 mm<br>Sheathing material: PVC |

### Mounting technology - Mounting brackets


|   | Part no. | Designation   | Article             | Description   |
|---|----------|---------------|---------------------|---|
|  | 50118542 | BT 200M.5     | Mounting bracket    | Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type, Suited for M3 screws<br>Type of mounting device: Adjustable<br>Material: Stainless steel |
|   | 50124651 | BT 205M-10SET | Mounting device set | Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Rigid<br>Material: Metal                                      |

## Accessories

### Mounting technology - Rod mounts

|   | Part no. | Designation  | Article         | Description  |
|---|----------|--------------|-----------------|--|
|  | 50117255 | BTU 200M-D12 | Mounting system | Design of mounting device: Mounting system<br>Fastening, at system: For 12 mm rod, Sheet-metal mounting<br>Mounting bracket, at device: Screw type, Suited for M3 screws<br>Type of mounting device: Clampable, Adjustable, Turning, 360°<br>Material: Metal |

### Standard reflectors

|   | Part no.    | Designation | Article   | Description  |
|---|-------------|-------------|-----------|--|
|  | 50136770 ** | DTKS 30x50  | Reflector | Design: Rectangular<br>Triple reflector size: 2.3 mm<br>Reflective surface: 25.9 mm x 42.5 mm<br>Material: Plastic<br>Base material: Plastic<br>Chemical designation of the material: PMMA<br>Fastening: Through-hole mounting, Adhesive |

\*\* Included in delivery contents

#### Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.