

Inductive Sensor with Full-Metal Housing

IX250SE65UA3

Part Number



- IP68/IP69K
- Pressure resistant
- Stainless steel housing

The inductive sensors with full-metal housing are suitable for harsh ambient conditions thanks to the 316L stainless steel housing. In addition, the sensors are ATEX-certified, which means that they can also be used in potentially explosive areas. The sensors with full-metal housing impress with their easy installation and reliable switching behavior.



Technical Data

Inductive Data	
Switching Distance	25 mm
Correction Factors Stainless Steel V2A/CuZn/Al	1,09/0,65/0,58
Mounting	Non-flush
Mounting A/B/C/D in mm	45/80/75/35
Mounting A/B/C/D (V2A) in mm	30/80/75/35
Switching Hysteresis	< 15 %
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 15 mA
Switching Frequency	200 Hz
Temperature Drift	< 10 %
Temperature Range	-25...80 °C
Switching Output Voltage Drop	< 2,5 V
Switching Output/Switching Current	400 mA
Residual Current Switching Output	< 100 µA
Short Circuit Protection	yes
Reverse Polarity and Overload Protection	yes
Protection Class	III
Mechanical Data	
Housing Material	Stainless steel, V4A
Sensing face	Stainless steel, V4A
Full Encapsulation	yes
Degree of Protection	IP68/IP69K
Connection	M12 × 1; 4-pin
Pressure Resistance Sensor Area	25 bar
Ex II 3G Ex nA IIC T5 Gc X	yes
Ex II 3D Ex tc IIIC T90 °C Dc IP6X X	yes
Safety-relevant Data	
MTTFd (EN ISO 13849-1)	2183,92 a
Stock Type	●
Packaging unit	1 Piece
PNP NC, PNP NO	●
Connection Diagram No.	101
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	130

Housing: Stainless Steel V4A 1.4404, 316L

Complementary Products

Circlip Z0007	
PNP-NPN Converter BG2V1P-N-2M	

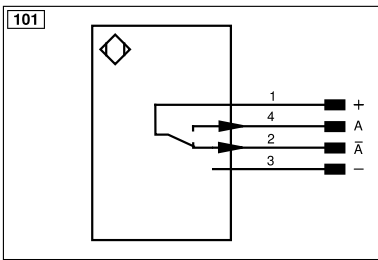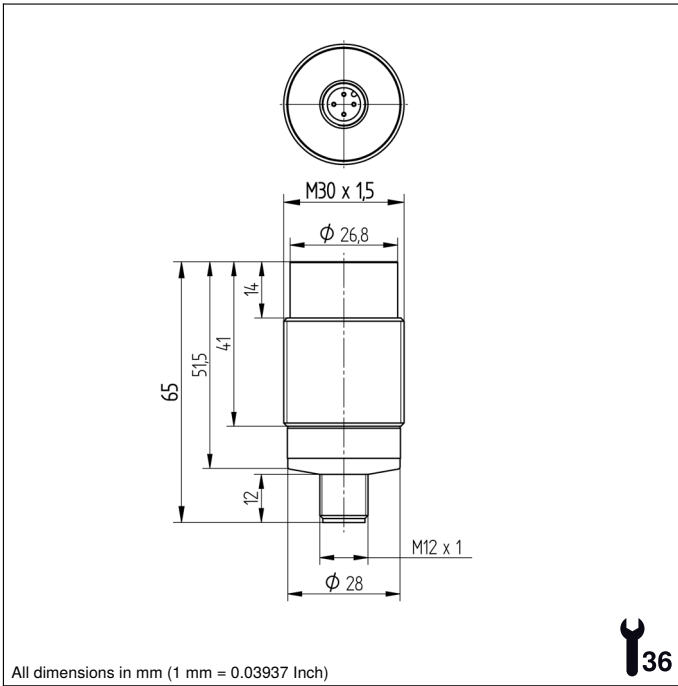

Legend			
+	Supply Voltage +	nc	Not connected
-	Supply Voltage 0 V	U	Test Input
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted
A	Switching Output (NO)	W	Trigger Input
Ā	Switching Output (NC)	W-	Ground for the Trigger Input
V	Contamination/Error Output (NO)	O	Analog Output
ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output
E	Input (analog or digital)	BZ	Block Discharge
T	Teach Input	Amv	Valve Output
Z	Time Delay (activation)	a	Valve Control Output +
S	Shielding	b	Valve Control Output 0 V
RxD	Interface Receive Path	SY	Synchronization
TxD	Interface Send Path	SY-	Ground for the Synchronization
RDY	Ready	E+	Receiver-Line
GND	Ground	S+	Emitter-Line
CL	Clock	±	Grounding
E/A	Output/Input programmable	SnR	Switching Distance Reduction
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)
OSSD	Safety Output	La	Emitted Light disengageable
Signal	Signal Output	Mag	Magnet activation
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation
ENo RS422	Encoder 0-pulse 0/0 (TTL)	EDM	Contact Monitoring
PT	Platinum measuring resistor	ENARs422	Encoder A/Ā (TTL)
		ENBRs422	Encoder B/B̄ (TTL)
		ENA	Encoder A
		ENB	Encoder B
		AMIN	Digital output MIN
		AMAX	Digital output MAX
		AOK	Digital output OK
		SY In	Synchronization In
		SY OUT	Synchronization OUT
		OLT	Brightness output
		M	Maintenance
		rsv	Reserved
		Wire Colors according to DIN IEC 60757	
		BK	Black
		BN	Brown
		RD	Red
		OG	Orange
		YE	Yellow
		GN	Green
		BU	Blue
		VT	Violet
		GY	Grey
		WH	White
		PK	Pink
		GNYE	Green/Yellow

Mounting

