

# Enabling Switch

## S2DF004

Part Number



- One-hand operation thanks to ergonomic design
- Rubberized enabling switch

The 3-stage enabling switch is very well suited to extensive commissioning or service work thanks to the special design. The ergonomic design prevents fatigue and makes work easier.

### Technical Data


Electrical Data	
Temperature Range	-5...60 °C
Mechanical Data	
Housing Material	Plastic
Service Life (Switching Cycles)	1000000
Degree of Protection	IP54
Connection	Coil cable, 12-wire, 5 m
Safety-relevant Data	
B10d Switching Cycles	100 000
Changeover Contacts	3
Function	
3-stage	yes
Connection Diagram No.	<b>861</b>
Control Panel No.	<b>FP2</b>
Suitable Mounting Technology No.	<b>840</b>

### Complementary Products


Safety Relay SR4B3B01S, SR4D3B01S  
Software

### Ctrl. Panel

FP2



93 = Confirmation key

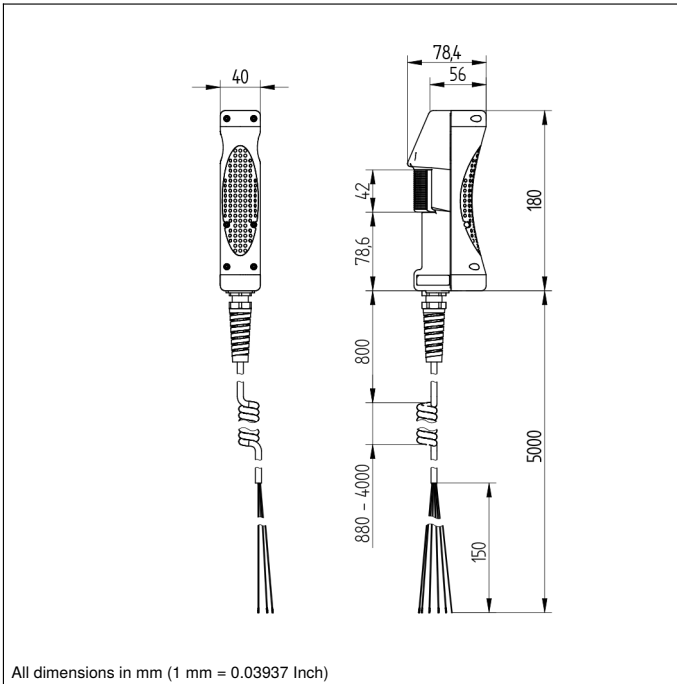

All dimensions in mm (1 mm = 0.03937 Inch)

