

Safety Switch

RFID


SD4RAS02SN89

Part Number



- Easy to clean
- High level of manipulation protection thanks to RFID coding
- Integrated locking
- Protection mode IP69K
- Universal fastening opportunities

Separating safety devices can be easily protected up to cat. 4 PL e using these contactless safety switches, even during series connection. Response and risk times remain unchanged at all times. Extensive diagnosis functions boost system availability and make installation and maintenance easier. The locking version can be used as a stop and secures small doors or flaps.

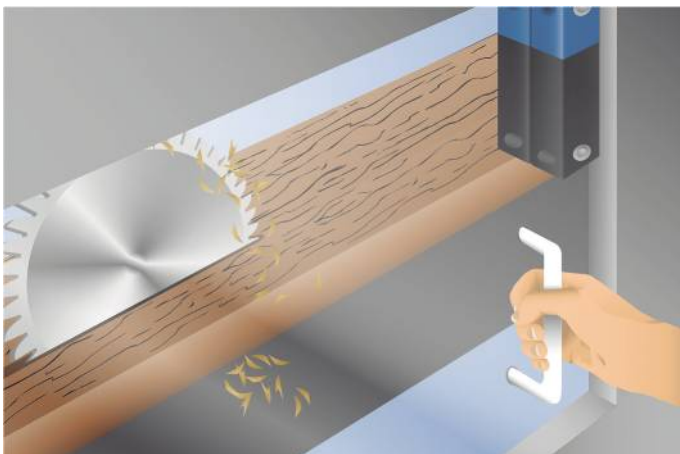


Technical Data


Electrical Data	
Sensor Type	Switch
Supply Voltage	20,4...26,4 V DC
Response Time	< 100 ms
Risk time	< 200 ms
Temperature Range	-25...70 °C
Storage temperature	-25...85 °C
Safety Output	OSSD
No. Safety Outputs (OSSDs)	2
PNP Safety Output/Switching Current	< 250 mA
Safety Output Voltage Drop	< 1 V
Number of Signal Outputs	1
PNP signal output switching current	50 mA
Short Circuit and Overload Protection	yes
Reverse Polarity Protection	yes
Protection Class	II
Mechanical Data	
Switching Distance	12 mm
Protected Sao switching-off distance	10 mm
Protected Sar switching-off distance	16 mm
Housing Material	Plastic
Degree of Protection	IP65/IP67/IP69K
Connection	M12 × 1; 8-pin
Latching Force, typical	18 N
Safety-relevant Data	
Operating principle	RFID
Coding	Standard
Performance Level (EN ISO 13849-1)	Cat. 4 PL e
PFHD	2,70 × E-10 1/h
Safety Integrity Level (EN 61508)	SIL3
Safety Integrity Level (EN 62061)	SILCL3
PDDb (EN 60947-5-3)	yes
Function	
Series Connection	yes
Permanent magnet	yes
Applicable actuator	SD4RAA02
Connection Diagram No.	P02
Suitable Connection Equipment No.	89

Complementary Products

Safety Relay SR4B3B01S, SR4D3B01S
Seal Set Z0047
Software

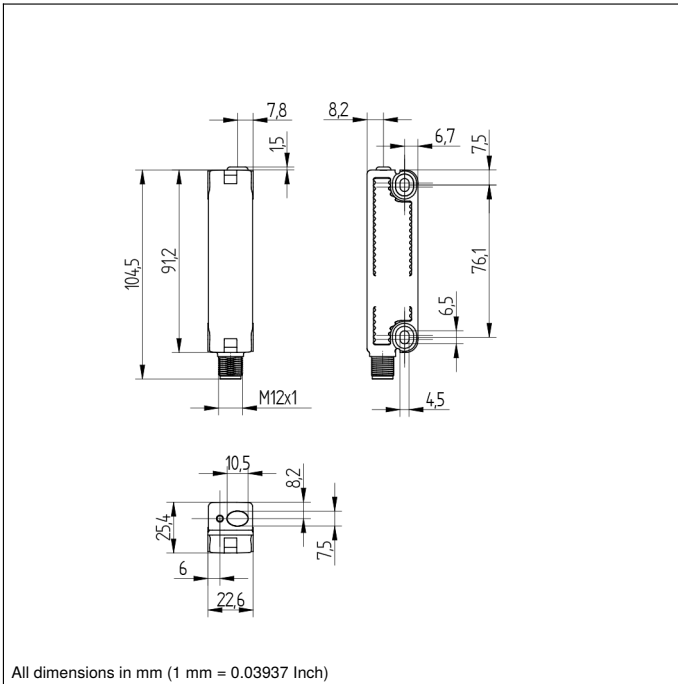

All dimensions in mm (1 mm = 0.03937 Inch)

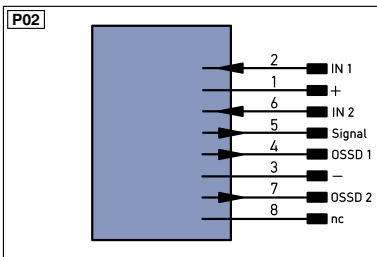

Legend

+ Supply Voltage +	nc not connected	PT Platinum measuring resistor	EN^{A/RS422} Encoder A/ \bar{A} (TTL)
- Supply Voltage 0 V	U Test Input	W Trigger Input	EN^{B/RS422} Encoder B/ \bar{B} (TTL)
~ Supply Voltage (AC Voltage)	\bar{U} Test Input inverted	W- Ground for the Trigger Input	EN^A Encoder A
A Switching Output (NO)	O Analog Output	O- Ground for the Analog Output	EN^B Encoder B
\bar{A} Switching Output (NC)	BZ Block Discharge	AMV Valve Output	A_{MIN} Digital output MIN
V Contamination/Error Output (NO)	AMV Valve Output	a Valve Control Output +	A_{MAX} Digital output MAX
\bar{V} Contamination/Error Output (NC)	a Valve Control Output +	b Valve Control Output 0 V	A_{OK} Digital output OK
E Input (analog or digital)	b Valve Control Output 0 V	SY Synchronization	SY_{in} Synchronization In
T Teach Input	SY Synchronization	SY- Ground for the Synchronization	SY_{OUT} Synchronization OUT
Z Time Delay (activation)	E+ Receiver-Line	E+ Receiver-Line	OL_T Brightness output
S Shielding	S+ Emitter-Line	S+ Emitter-Line	M Maintenance reserved
RxD Interface Receive Path	\pm Grounding	S_{nR} Switching Distance Reduction	rsv reserved
TxD Interface Send Path	S_{nR} Switching Distance Reduction	Rx+/- Ethernet Receive Path	Wire Colors according to IEC 60757
RDY Ready	Rx+/- Ethernet Receive Path	Tx+/- Ethernet Send Path	BK Black
GND Ground	Tx+/- Ethernet Send Path	Bus Interfaces-Bus A(+)/B(-)	BN Brown
CL Clock	Bus Interfaces-Bus A(+)/B(-)	L_a Emitted Light disengageable	RD Red
E/A Output/Input programmable	L_a Emitted Light disengageable	Mag Magnet activation	OG Orange
IO-Link	Mag Magnet activation	RES Input confirmation	YE Yellow
PoE Power over Ethernet	RES Input confirmation	EDM Contactor Monitoring	GN Green
IN Safety Input	EDM Contactor Monitoring		BU Blue
OSSD Safety Output			VT Violet
Signal Signal Output			GY Grey
Bl..D+/- Ethernet Gigabit bidirect. data line (A-D)			WH White
EN^{0/RS422} Encoder 0-pulse 0-0 (TTL)			PK Pink
			GNYE Green/Yellow

