

## Technical data sheet

### Diffuse sensor with background suppression

Part no.: 50134612

HT46CI/4W-200-M12



For illustration purposes only

#### Contents

- Technical data
- Dimensioned drawings
- Electrical connection
- Diagrams
- Operation and display
- Part number code
- Notes
- Further information
- Accessories



## Technical data

### Basic data

|                     |                                                          |
|---------------------|----------------------------------------------------------|
| Series              | 46C                                                      |
| Operating principle | Diffuse reflection principle with background suppression |

### Special version

|                 |                |
|-----------------|----------------|
| Special version | Warning output |
|-----------------|----------------|

### Optical data

|                             |                                      |
|-----------------------------|--------------------------------------|
| Black-white error           | < 10% up to 1200 mm                  |
| Operating range             | Guaranteed operating range           |
| Operating range, white 90%  | 0.005 ... 3 m                        |
| Operating range, gray 18%   | 0.02 ... 2 m                         |
| Operating range, black 6%   | 0.05 ... 1.5 m                       |
| Operating range limit       | Typical operating range              |
| Operating range limit       | 0.005 ... 3 m                        |
| Adjustment range            | 120 ... 3,000 mm                     |
| Beam path                   | Focused                              |
| Light source                | LED, Infrared                        |
| Wavelength                  | 860 nm                               |
| Transmitted-signal shape    | Pulsed                               |
| LED group                   | Exempt group (in acc. with EN 62471) |
| Type of light spot geometry | Rectangular                          |
| Focus                       | Fixed                                |

### Electrical data

|                    |                              |
|--------------------|------------------------------|
| Protective circuit | Polarity reversal protection |
|                    | Short circuit protected      |
|                    | Transient protection         |

### Performance data

|                      |                                        |
|----------------------|----------------------------------------|
| Supply voltage $U_B$ | 10 ... 30 V, DC, Incl. residual ripple |
| Residual ripple      | 0 ... 15 %, From $U_B$                 |
| Open-circuit current | 0 ... 30 mA                            |

### Outputs

|                                     |            |
|-------------------------------------|------------|
| Number of digital switching outputs | 2 Piece(s) |
|-------------------------------------|------------|

### Switching outputs

|                         |                                           |
|-------------------------|-------------------------------------------|
| Voltage type            | DC                                        |
| Switching current, max. | 100 mA                                    |
| Switching voltage       | high: $\geq(U_B - 2V)$<br>low: $\leq 2 V$ |

### Switching output 1

|                     |                     |
|---------------------|---------------------|
| Assignment          | Connection 1, pin 4 |
| Switching element   | Transistor, PNP     |
| Switching principle | Light switching     |

### Switching output 2

|                     |                     |
|---------------------|---------------------|
| Assignment          | Connection 1, pin 2 |
| Switching element   | Transistor, PNP     |
| Switching principle | $U_B$ switching     |
| Function            | Warning output      |

### Time behavior

|                     |        |
|---------------------|--------|
| Switching frequency | 250 Hz |
| Response time       | 2 ms   |
| Readiness delay     | 300 ms |

### Connection 1

|                    |                      |
|--------------------|----------------------|
| Function           | Signal OUT           |
|                    | Voltage supply       |
| Type of connection | Cable with connector |
| Cable length       | 200 mm               |
| Sheathing material | PUR                  |
| Cable color        | Black                |
| Wire cross section | 0.2 mm <sup>2</sup>  |
| Thread size        | M12                  |
| Type               | Male                 |
| Material           | Plastic              |
| No. of pins        | 4 -pin               |
| Encoding           | A-coded              |

### Mechanical data

|                            |                                                       |
|----------------------------|-------------------------------------------------------|
| Dimension (W x H x L)      | 20.5 mm x 76.3 mm x 44 mm                             |
| Housing material           | Plastic                                               |
| Plastic housing            | PC-PBT                                                |
| Lens cover material        | Plastic / PMMA                                        |
| Net weight                 | 65 g                                                  |
| Housing color              | Red                                                   |
| Type of fastening          | Through-hole mounting<br>Via optional mounting device |
| Compatibility of materials | ECOLAB                                                |

### Operation and display

|                                     |                         |
|-------------------------------------|-------------------------|
| Type of display                     | LED                     |
| Number of LEDs                      | 2 Piece(s)              |
| Operational controls                | Multiturn potentiometer |
| Function of the operational control | Range adjustment        |

### Environmental data

|                                |               |
|--------------------------------|---------------|
| Ambient temperature, operation | -40 ... 60 °C |
| Ambient temperature, storage   | -40 ... 70 °C |

### Certifications


|                      |               |
|----------------------|---------------|
| Degree of protection | IP 67         |
|                      | IP 69K        |
| Protection class     | III           |
| Certifications       | c UL US       |
| Standards applied    | IEC 60947-5-2 |

### Classification

|                       |          |
|-----------------------|----------|
| Customs tariff number | 85365019 |
| ECLASS 5.1.4          | 27270904 |
| ECLASS 8.0            | 27270904 |
| ECLASS 9.0            | 27270904 |
| ECLASS 10.0           | 27270904 |
| ECLASS 11.0           | 27270904 |
| ECLASS 12.0           | 27270903 |
| ECLASS 13.0           | 27270903 |
| ETIM 5.0              | EC002719 |
| ETIM 6.0              | EC002719 |
| ETIM 7.0              | EC002719 |
| ETIM 8.0              | EC002719 |

## Dimensioned drawings

All dimensions in millimeters

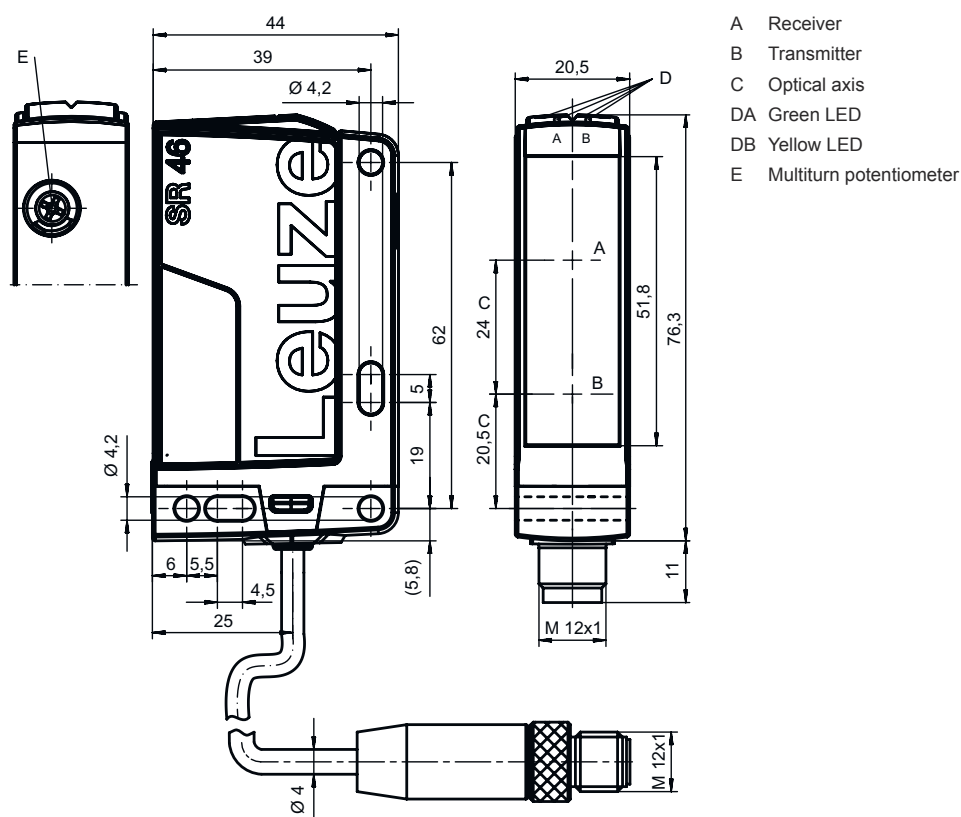

- A Receiver
- B Transmitter
- C Optical axis
- DA Green LED
- DB Yellow LED
- E Multiturn potentiometer


## Electrical connection

### Connection 1

|                    |                      |
|--------------------|----------------------|
| Function           | Signal OUT           |
|                    | Voltage supply       |
| Type of connection | Cable with connector |
| Cable length       | 200 mm               |
| Sheathing material | PUR                  |
| Cable color        | Black                |
| Wire cross section | 0.2 mm <sup>2</sup>  |
| Thread size        | M12                  |
| Type               | Male                 |
| Material           | Plastic              |
| No. of pins        | 4 -pin               |
| Encoding           | A-coded              |


### Pin Pin assignment

|   |          |
|---|----------|
| 1 | V+       |
| 2 | OUT WARN |
| 3 | GND      |
| 4 | OUT 1    |




## Diagrams

Typ. response behavior (white 90 %)

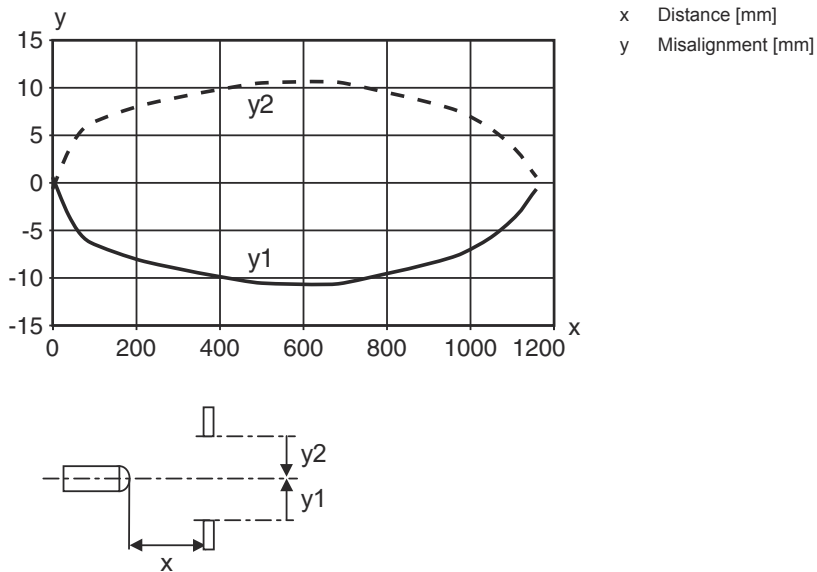

Typ. black/white behavior

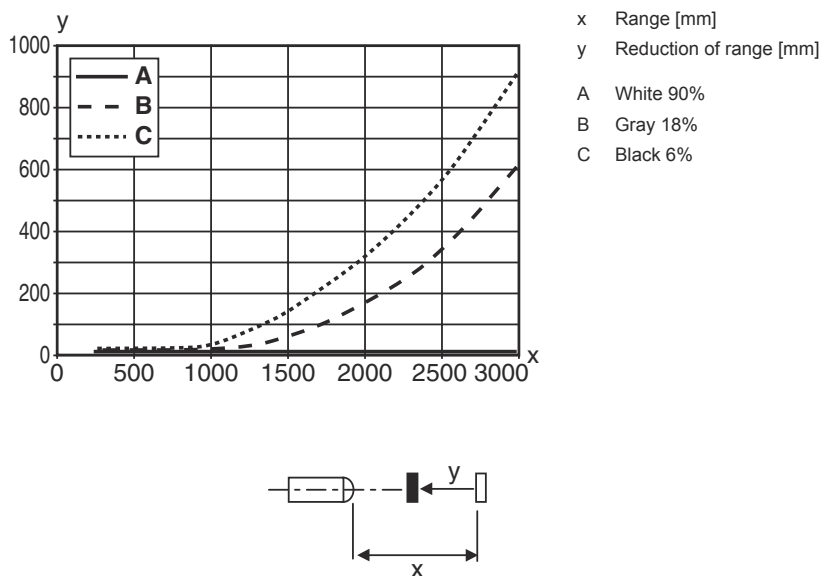

## Operation and display

| LED | Display                  | Meaning               |
|-----|--------------------------|-----------------------|
| 1   | Green, continuous light  | Operational readiness |
| 2   | Yellow, continuous light | Reflection            |
|     | Yellow, flashing         | No function reserve   |

## Part number code

Part designation: AAA46C d EE-f.GG H/i J-K

|               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>AAA46C</b> | <b>Operating principle / construction</b><br>HT46C: Diffuse reflection sensor with background suppression<br>LS46C: Throughbeam photoelectric sensor transmitter<br>LE46C: Throughbeam photoelectric sensor receiver<br>PRK46C: Retro-reflective photoelectric sensor with polarization filter<br>RK46C: Retro-reflective photoelectric sensor                                                                                                                                                                                                                                                                                                                                                |
| <b>d</b>      | <b>Light type</b><br>n/a: red light<br>I: infrared light                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>EE</b>     | <b>Light source</b><br>n/a: LED<br>L1: laser class 1<br>L2: laser class 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>f</b>      | <b>Preset range (optional)</b><br>n/a: operating range acc. to data sheet<br>xxxF: Preset range [mm]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>GG</b>     | <b>Equipment</b><br>n/a: standard<br>1: 270° potentiometer<br>8: activation input (activation with high signal)<br>01: diffuse reflection sensor with background suppression (HT): HG tape (HighGain tape) is not detected from a distance of 900 mm with a set operating range of ≤ 450 mm (diffuse reflection: 6%, black)<br>D: Depolarizing media<br>E: Diffuse reflection sensor with background suppression (HT): optimized for dusty environments<br>SL: Diffuse reflection sensor with background suppression (HT): slit diaphragm 25 mm x 3 mm<br>P: throughbeam photoelectric sensor receiver (LE): edge filter for parallel operation<br>L: Light-band<br>XL: Extra long light spot |
| <b>H</b>      | <b>Operating range adjustment &amp; version</b><br>n/a with diffuse reflection sensor with background suppression (HT): range adjustment via mechanical adjusting spindle<br>n/a with retro-reflective photoelectric sensors (PRK): operating range not adjustable<br>1: retro-reflective photoelectric sensors (PRK/RK): sensitivity adjustment via potentiometer<br>3: teach-in via button<br>P2: resolution 2 mm                                                                                                                                                                                                                                                                           |
| <b>i</b>      | <b>Switching output/function OUT 1/IN: Pin 4 or black conductor</b><br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>L: IO-Link                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>J</b>      | <b>Switching output / function OUT 2/IN: pin 2 or white conductor</b><br>2: NPN transistor output, light switching<br>N: NPN transistor output, dark switching<br>4: PNP transistor output, light switching<br>P: PNP transistor output, dark switching<br>8: activation input (activation with high signal)<br>9: deactivation input (deactivation with high signal)<br>W: warning output<br>X: pin not used                                                                                                                                                                                                                                                                                 |
| <b>K</b>      | <b>Electrical connection</b><br>n/a: cable, standard length 2000 mm, 4-wire<br>200-M12: cable, length 200 mm with M12 connector, 4-pin, axial (plug)<br>M12: M12 connector, 4-pin (plug)<br>500-M12: cable, length 500 mm with M12 connector, 4-pin, axial (plug)<br>1000-M12: cable, length 1000 mm with M12 connector, 4-pin, axial (plug)                                                                                                                                                                                                                                                                                                                                                  |

### Note



A list with all available device types can be found on the Leuze website at [www.leuze.com](http://www.leuze.com).

## Notes

### Observe intended use!



- ⚠ This product is not a safety sensor and is not intended as personnel protection.
- ⚠ The product may only be put into operation by competent persons.
- ⚠ Only use the product in accordance with its intended use.

### For UL applications:





- ⚠ For UL applications, use is only permitted in Class 2 circuits in accordance with the NEC (National Electric Code).
- ⚠ These proximity switches shall be used with UL Listed Cable assemblies rated 30V, 0.5A min, in the field installation, or equivalent (categories: CYJV/ CYJV7 or PVVA/PVVA7)

## Further information


- Light source: Average life expectancy 100,000 h at an ambient temperature of 25°C
- Response time: For short decay times, an ohmic load of approx. 5kOhm is recommended

## Accessories

### Connection technology - Connection cables


|                                                                                    | Part no. | Designation        | Article          | Description                                                                                                                                                                        |
|------------------------------------------------------------------------------------|----------|--------------------|------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50130652 | KD U-M12-4A-V1-050 | Connection cable | Connection 1: Connector, M12, Axial, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5.000 mm<br>Sheathing material: PVC  |
|  | 50130690 | KD U-M12-4W-V1-050 | Connection cable | Connection 1: Connector, M12, Angled, Female, A-coded, 4 -pin<br>Connector, LED: No<br>Connection 2: Open end<br>Shielded: No<br>Cable length: 5.000 mm<br>Sheathing material: PVC |

### Mounting technology - Mounting brackets

|                                                                                     | Part no. | Designation | Article         | Description                                                                                                                                                                              |
|-------------------------------------------------------------------------------------|----------|-------------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50105315 | BT 46       | Mounting device | Design of mounting device: Angle, L-shape<br>Fastening, at system: Through-hole mounting<br>Mounting bracket, at device: Screw type<br>Type of mounting device: Rigid<br>Material: Metal |

## Accessories

### Mounting technology - Rod mounts

|                                                                                   | Part no. | Designation  | Article         | Description                                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------------------|----------|--------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | 50117252 | BTU 300M-D12 | Mounting system | Design of mounting device: Mounting system<br>Fastening, at system: For 12 mm rod, Sheet-metal mounting<br>Mounting bracket, at device: Screw type, Suited for M4 screws<br>Type of mounting device: Clampable, Adjustable, Turning, 360°<br>Material: Metal |

#### Note



A list with all available accessories can be found on the Leuze website in the Download tab of the article detailed page.